


Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant -150mm

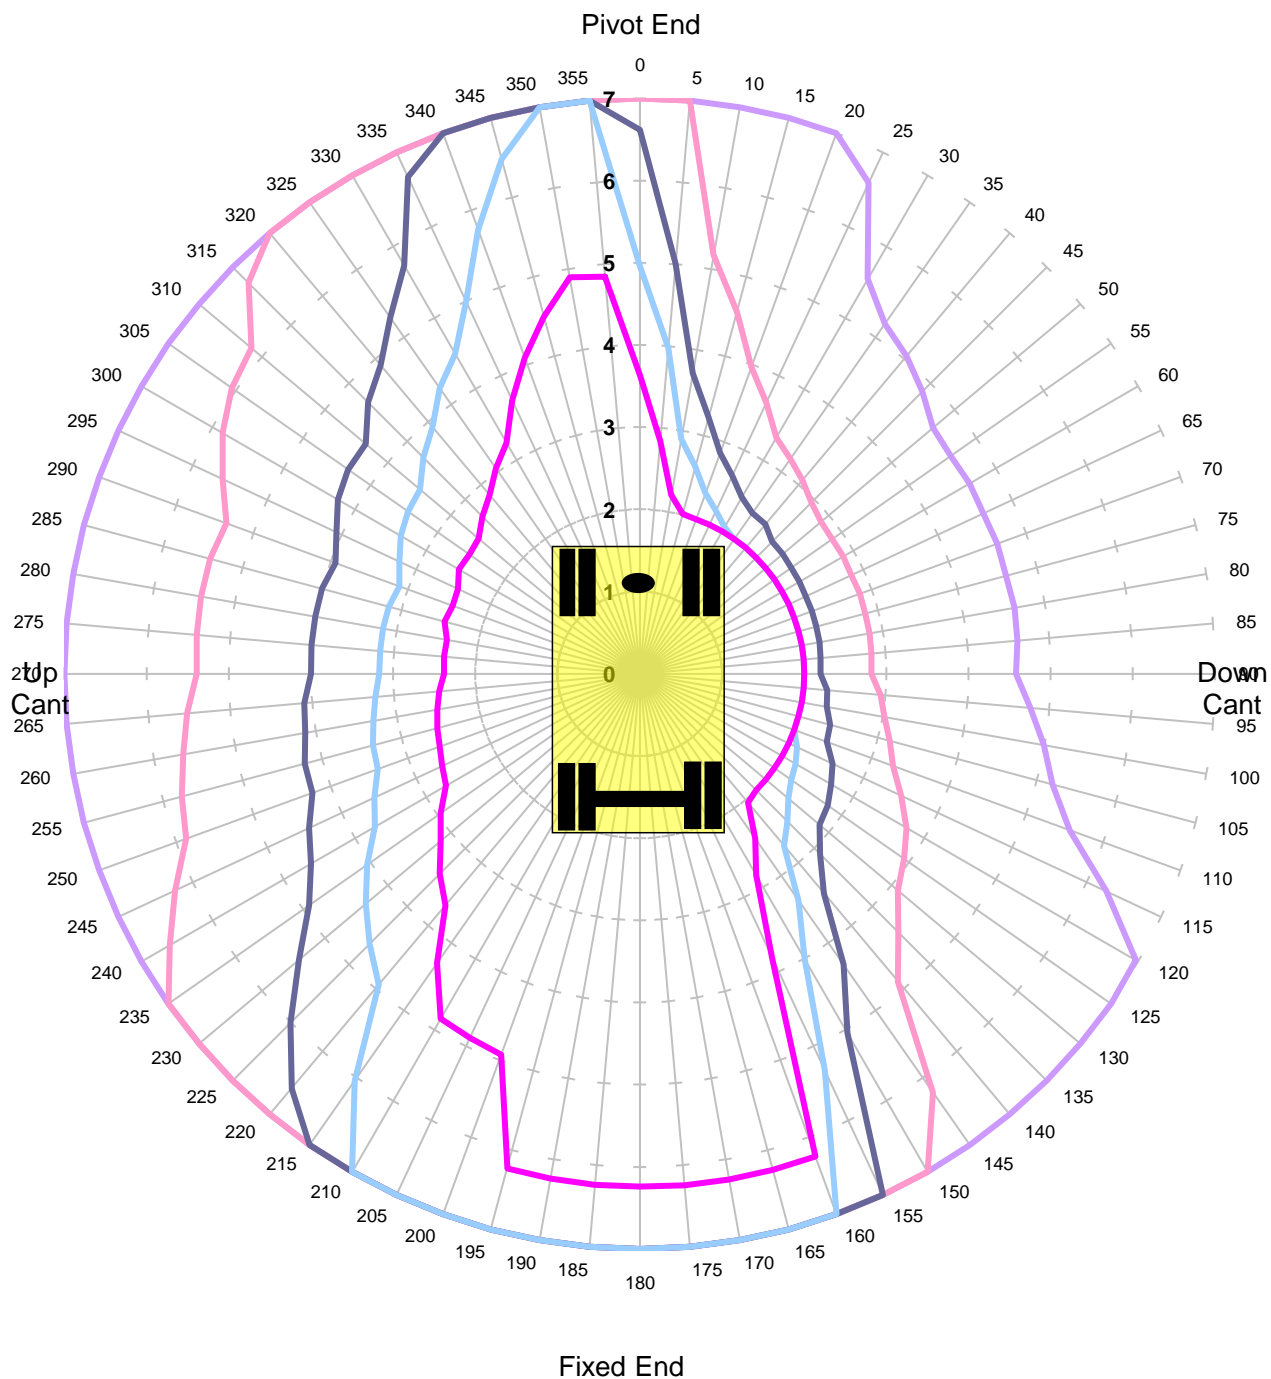

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant -50mm

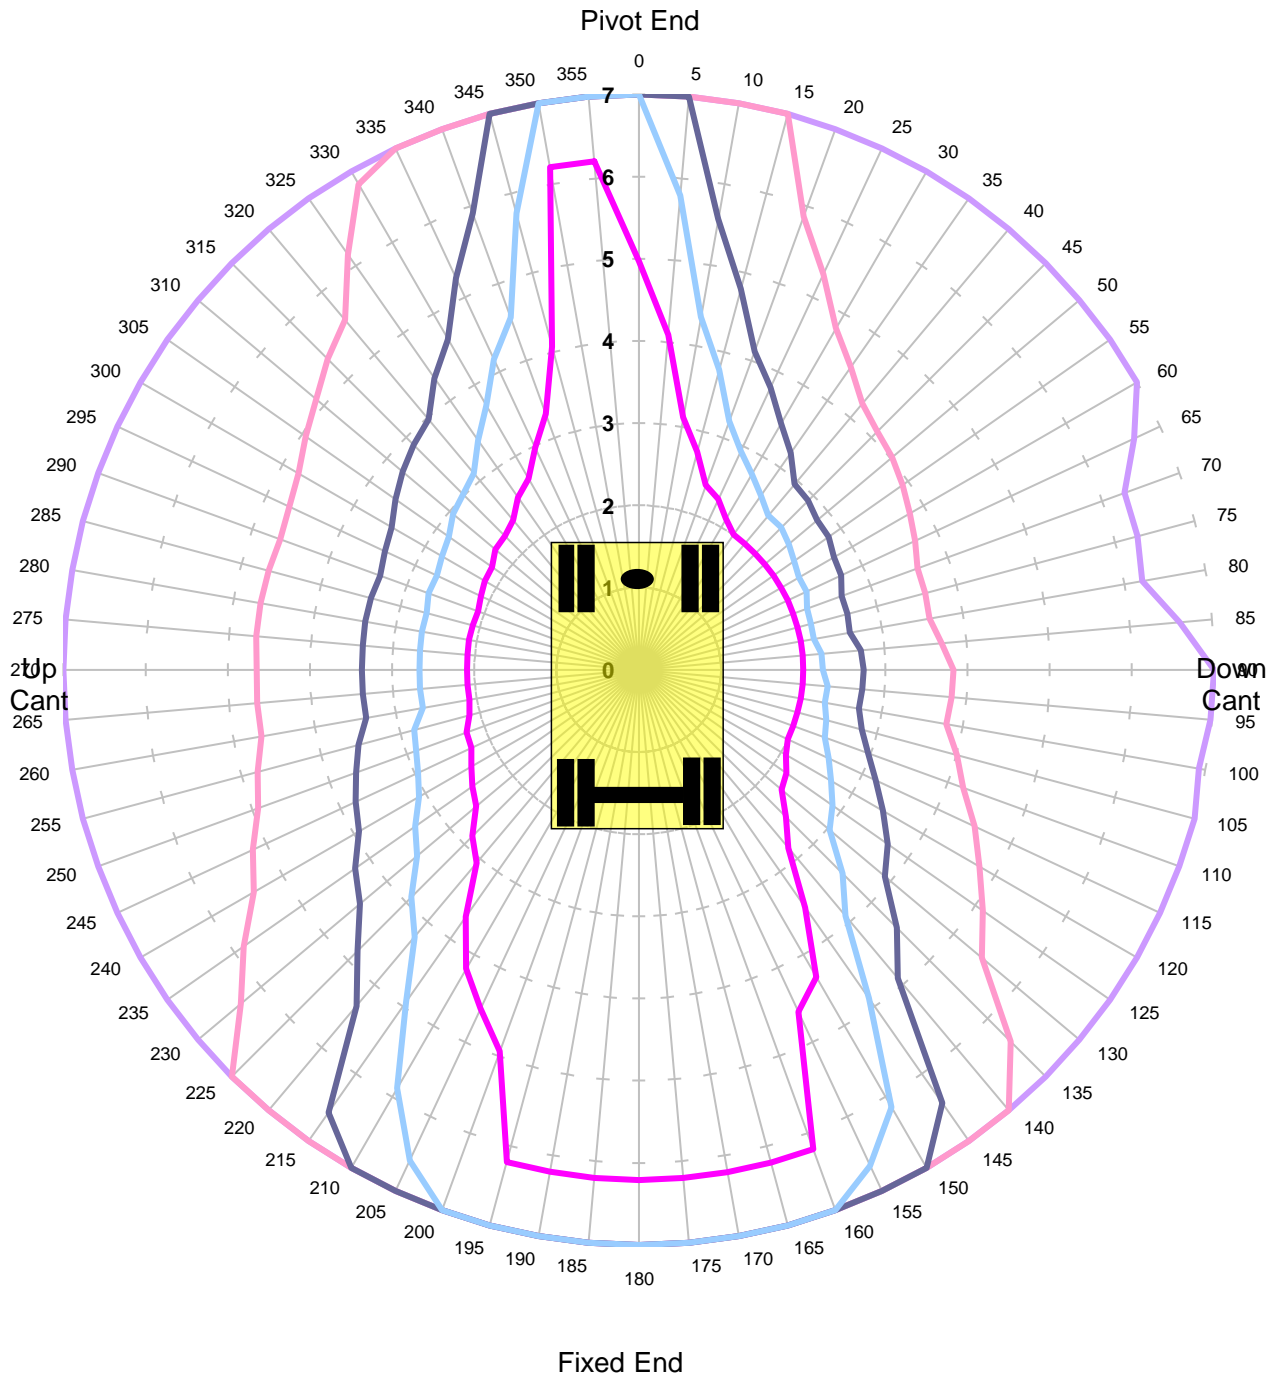


MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant 50mm

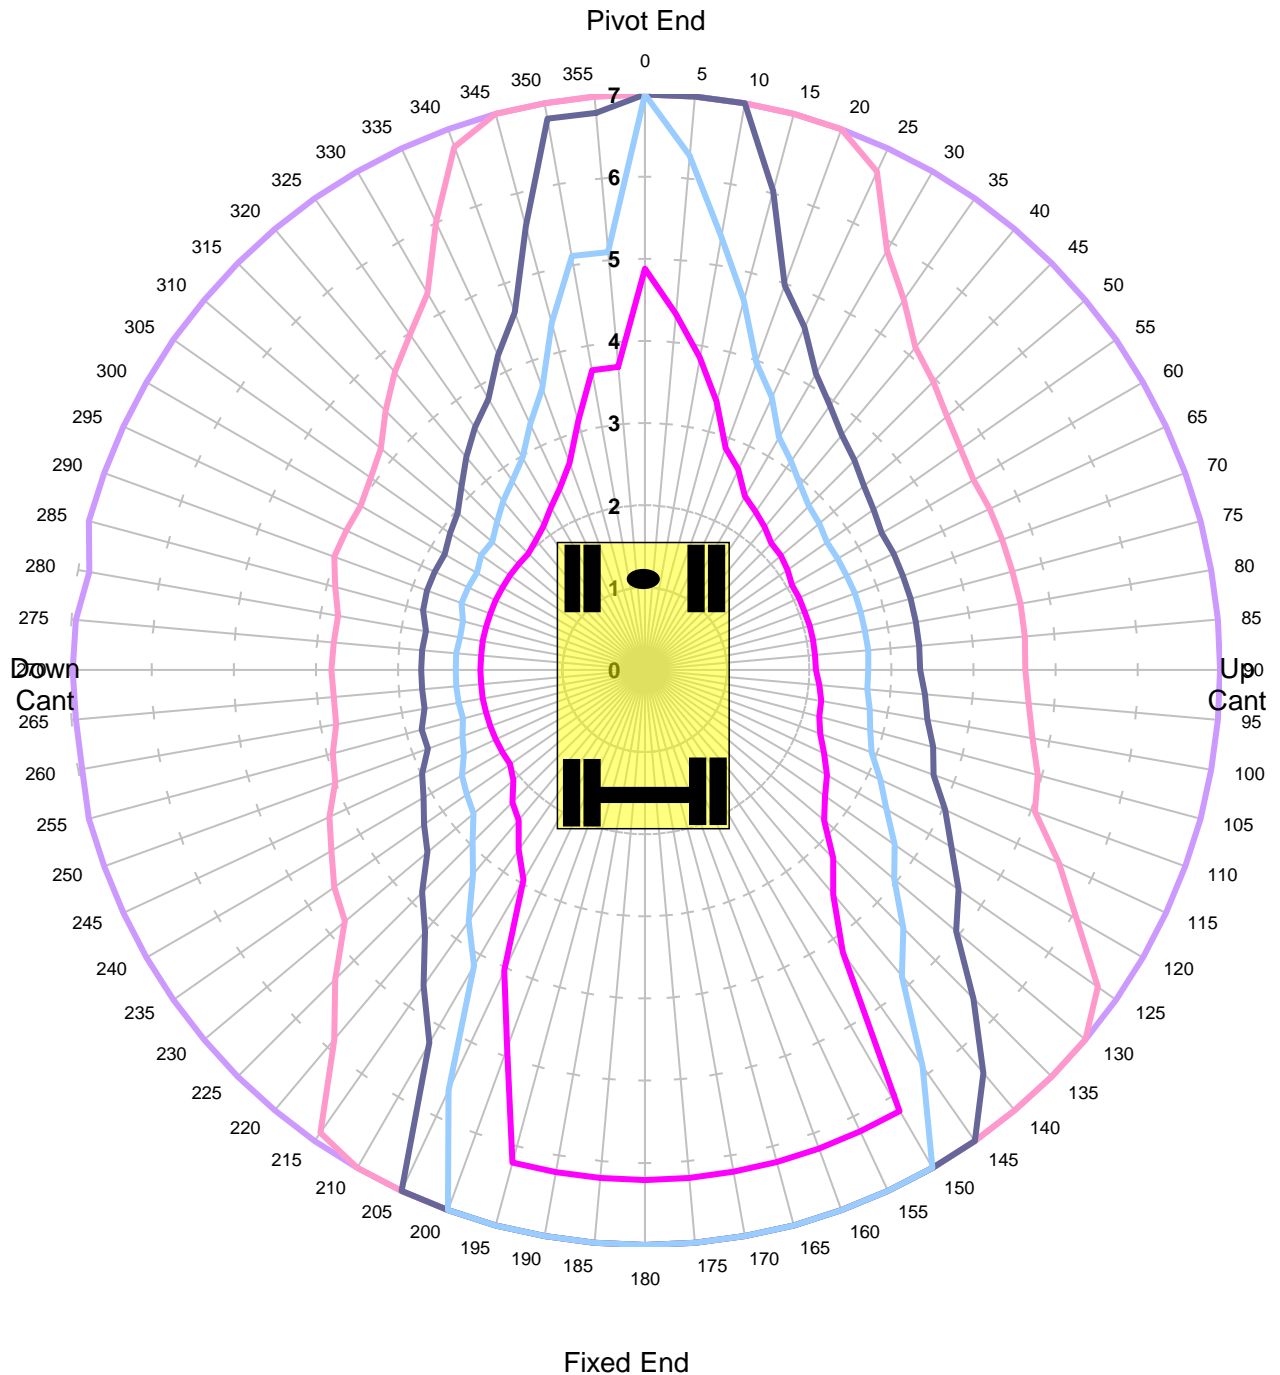

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant 150mm

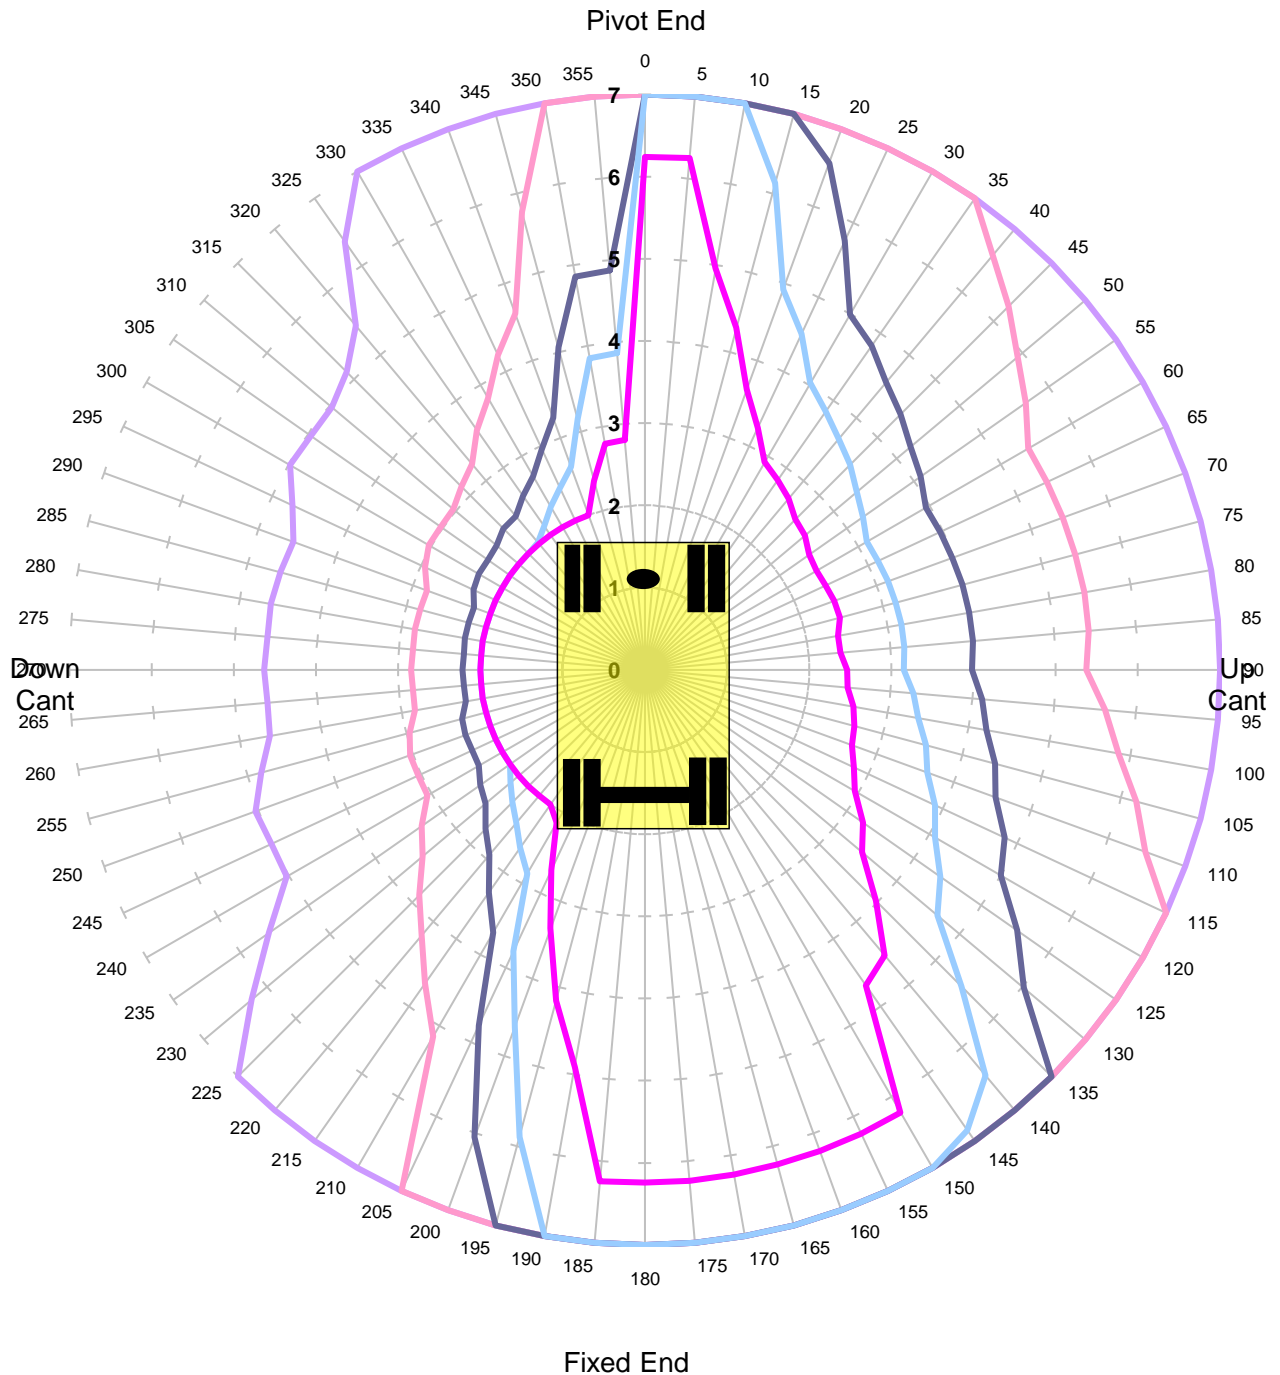

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant -150mm

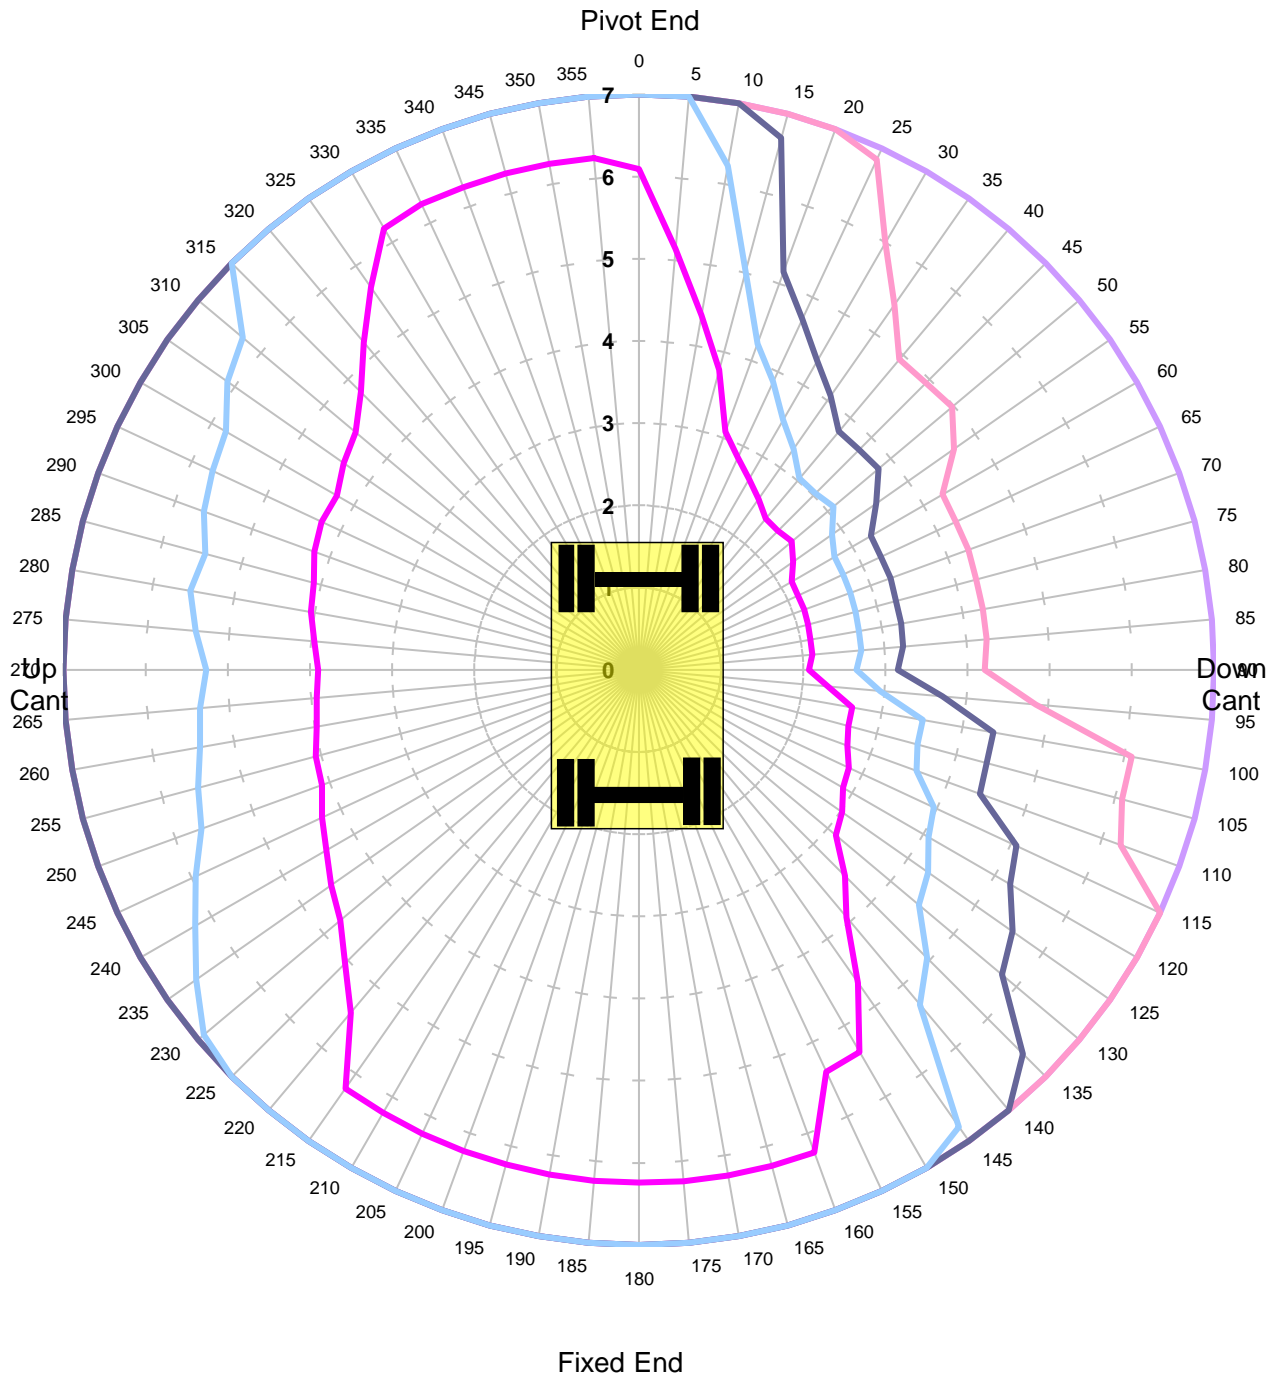

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant -50mm

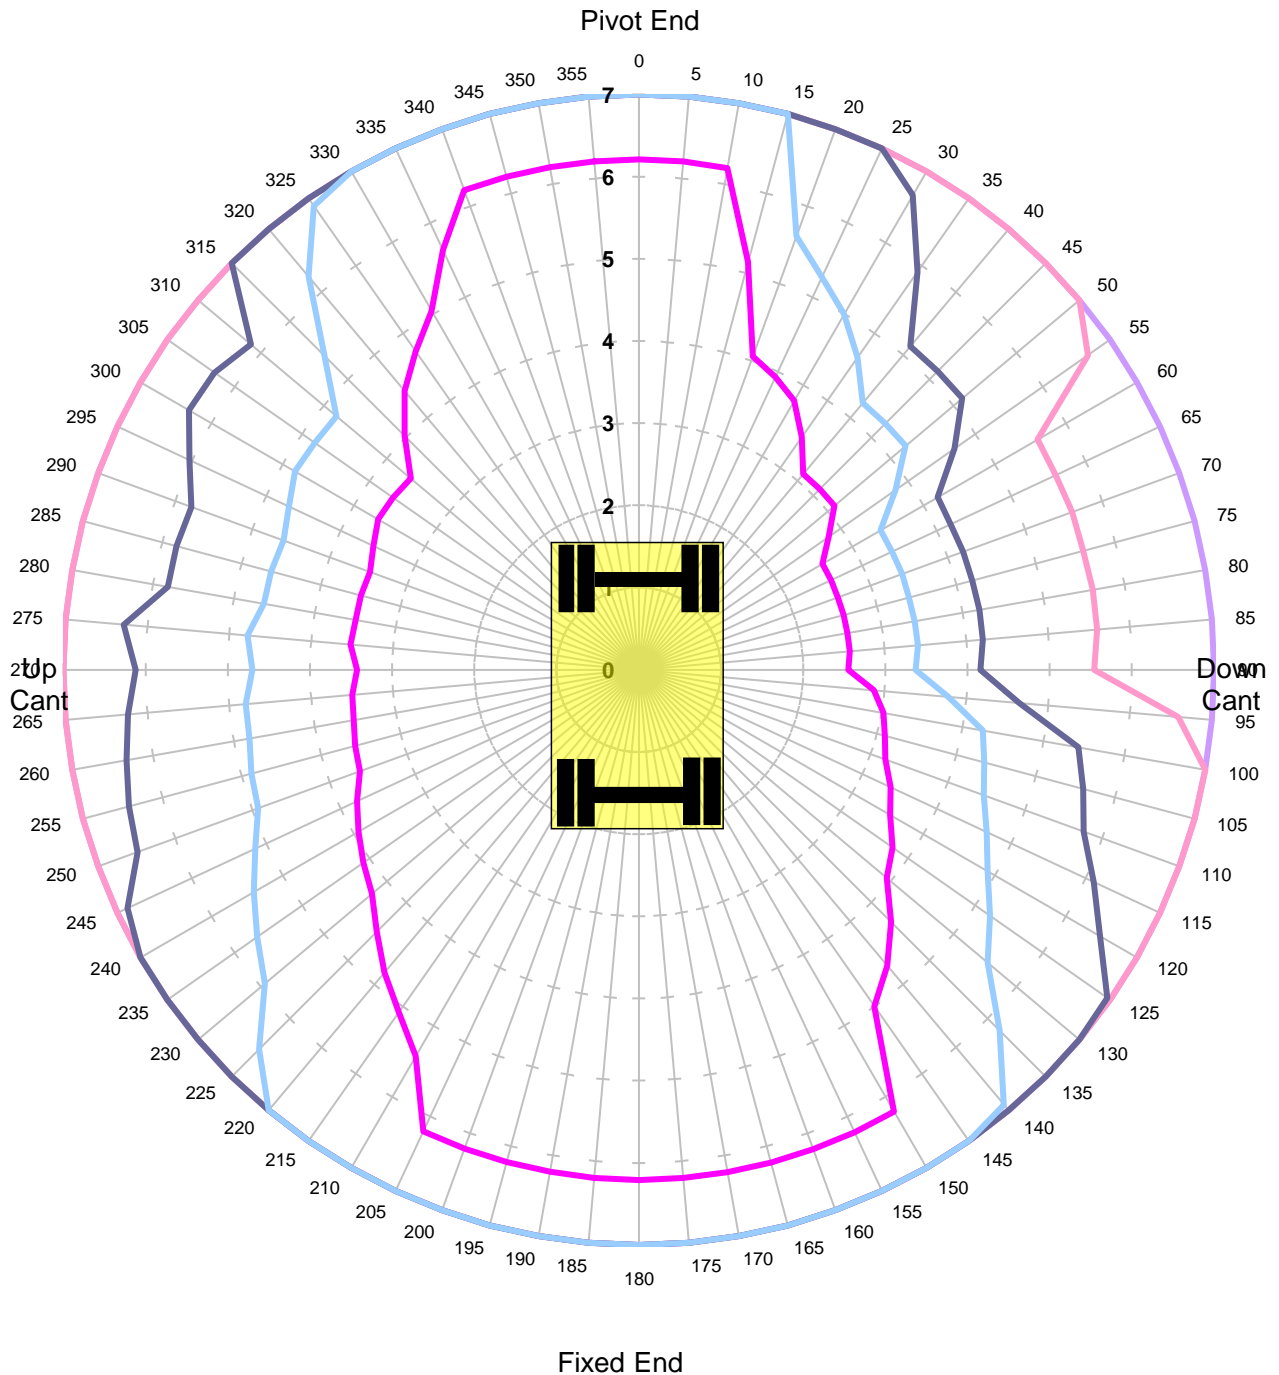

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant 50mm

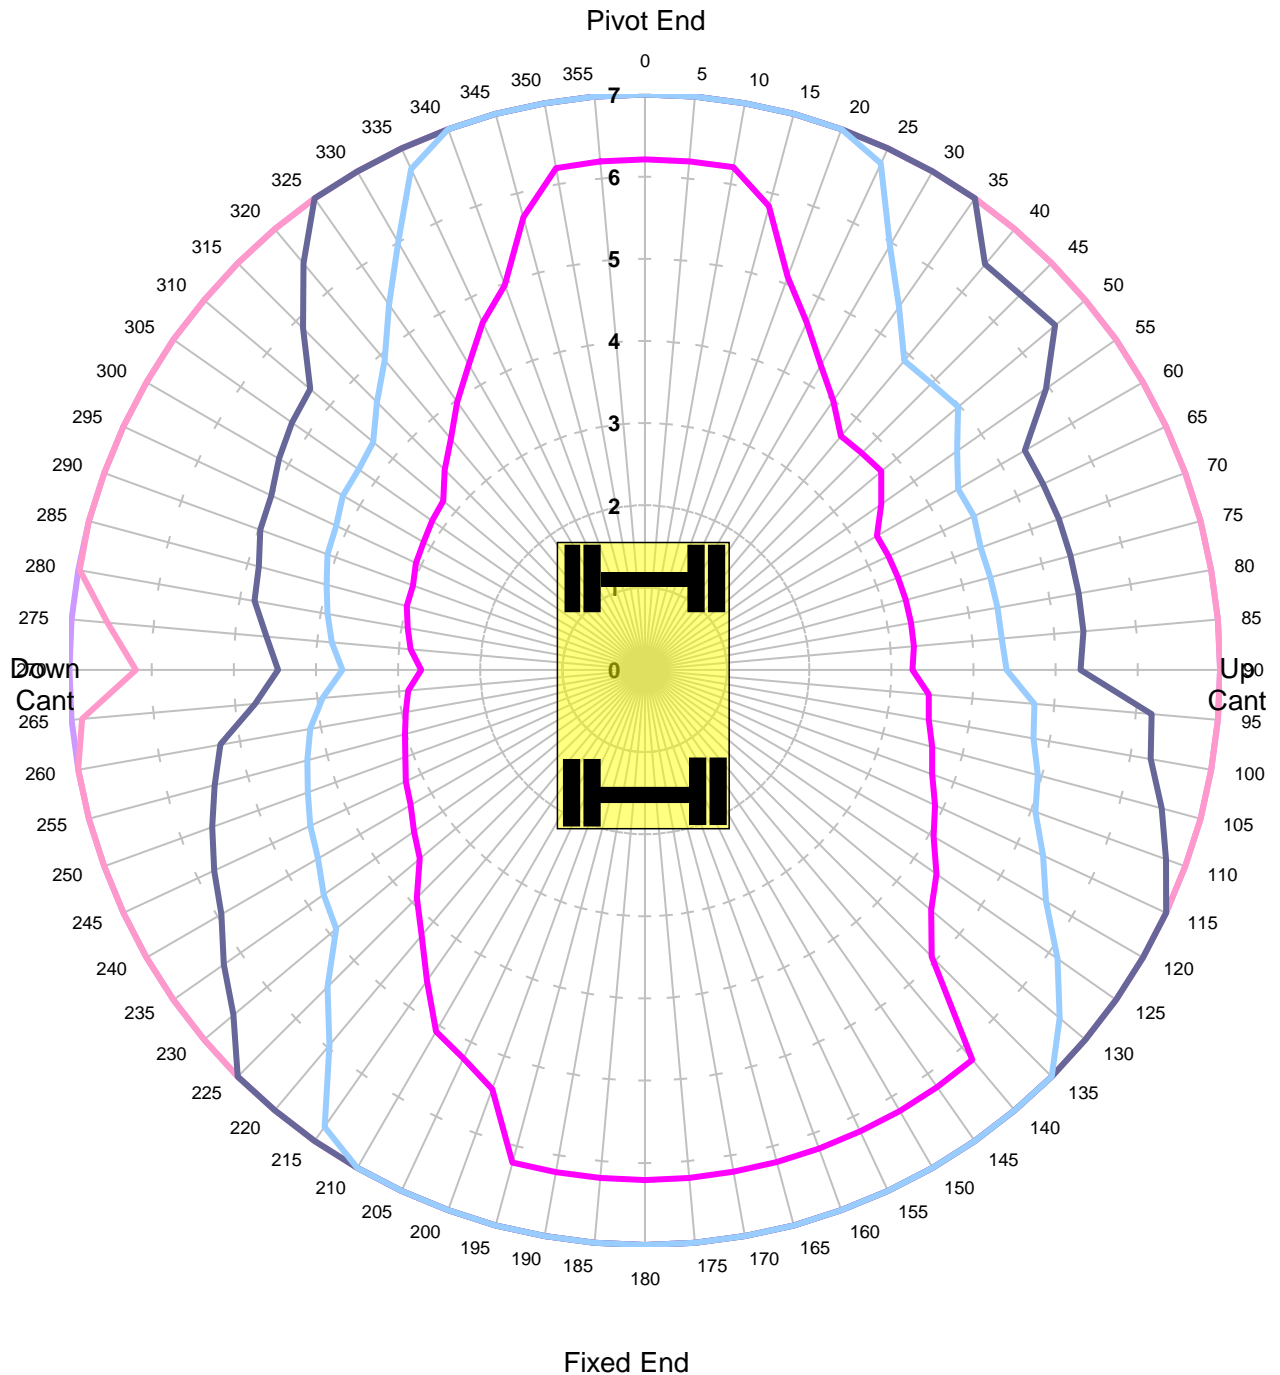


MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant 150mm

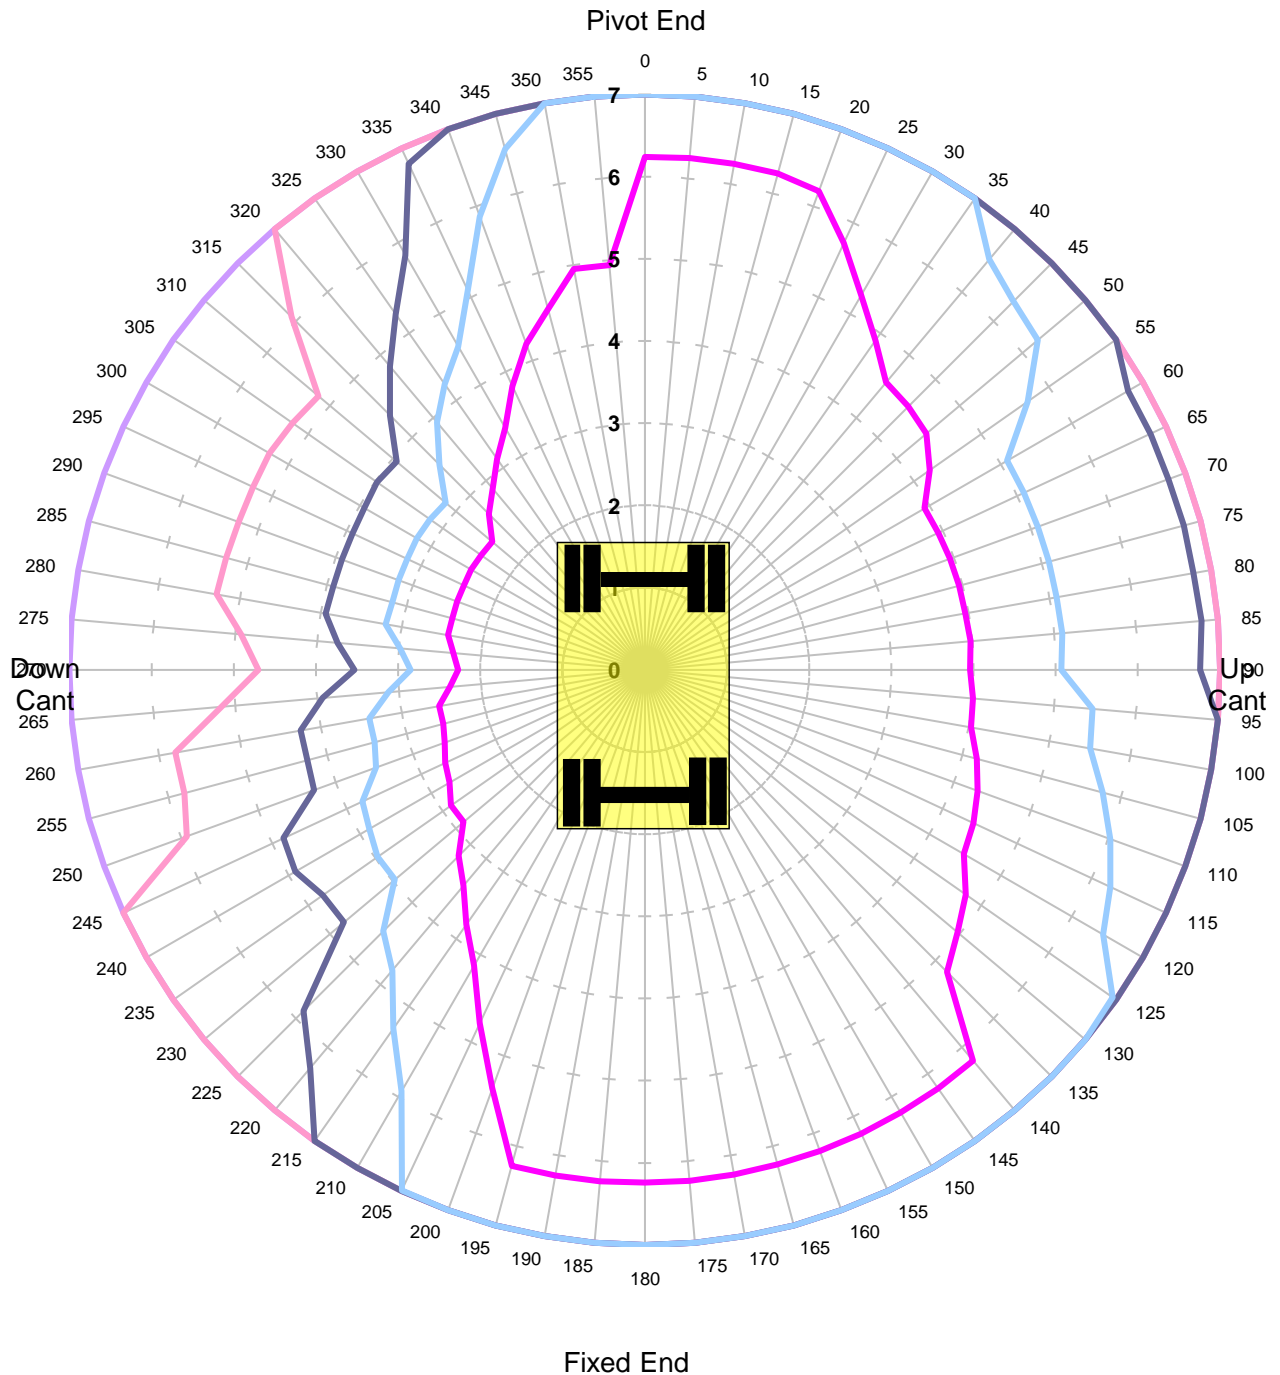


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift BP
Unlocked Road

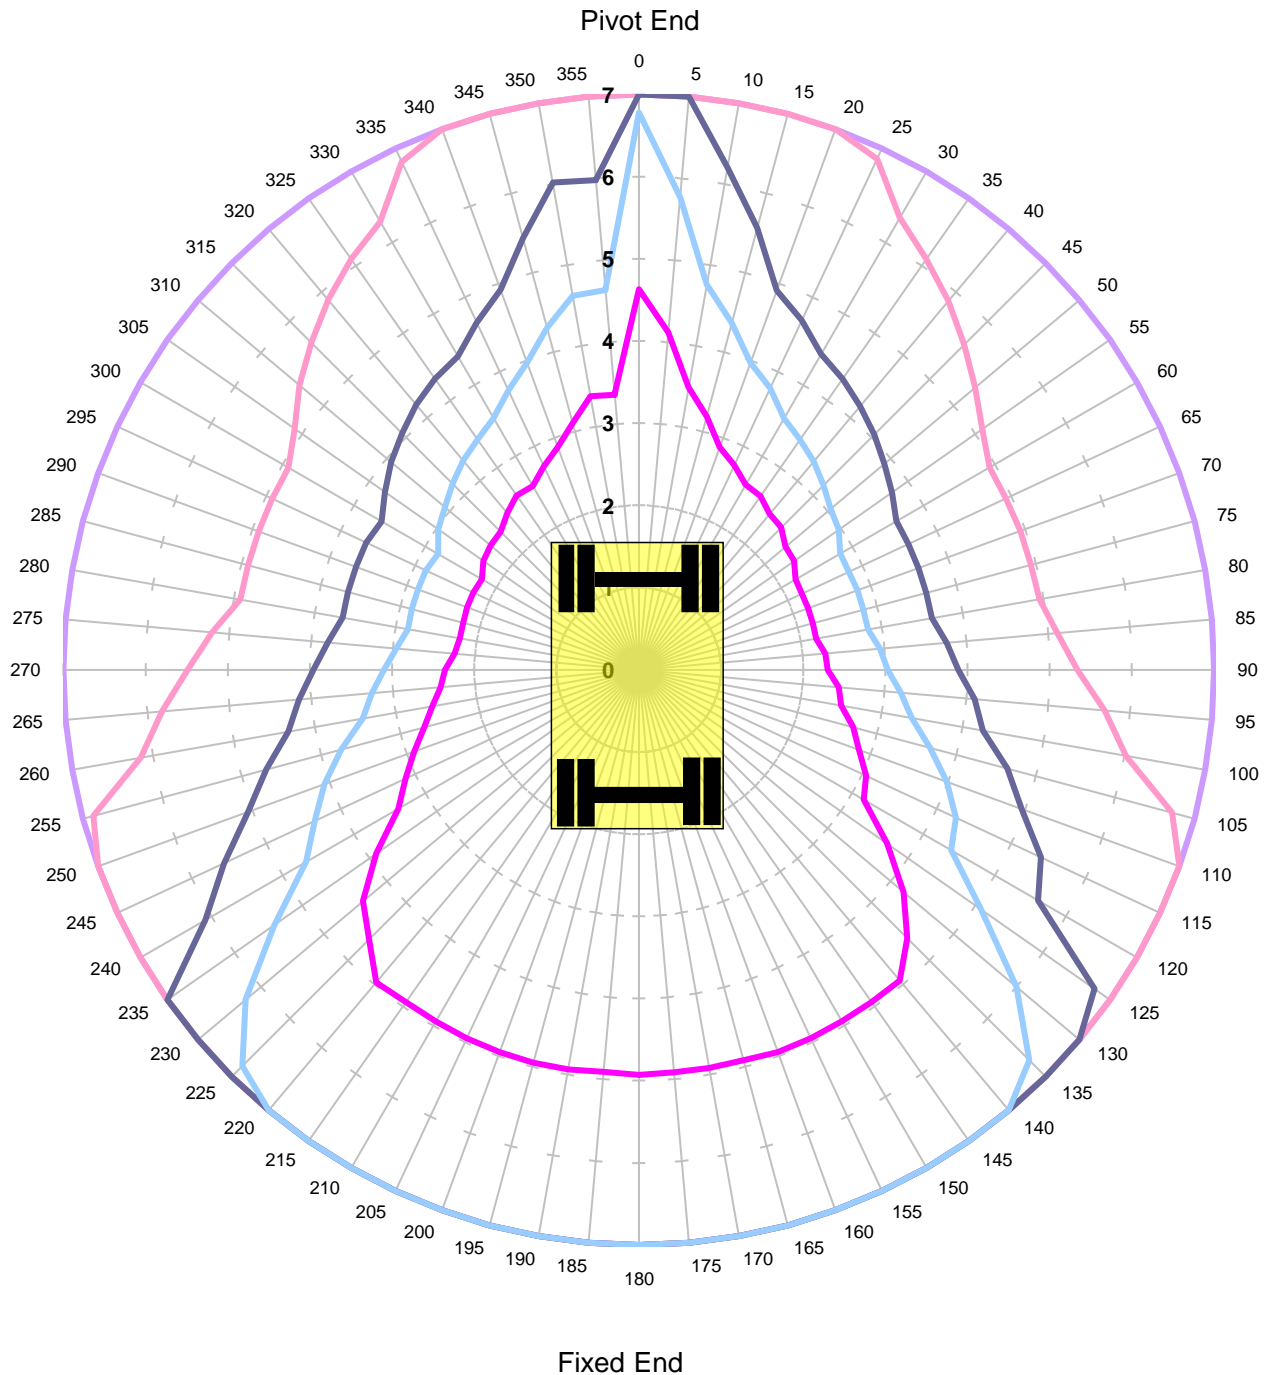


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	71.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift BP
Locked Road

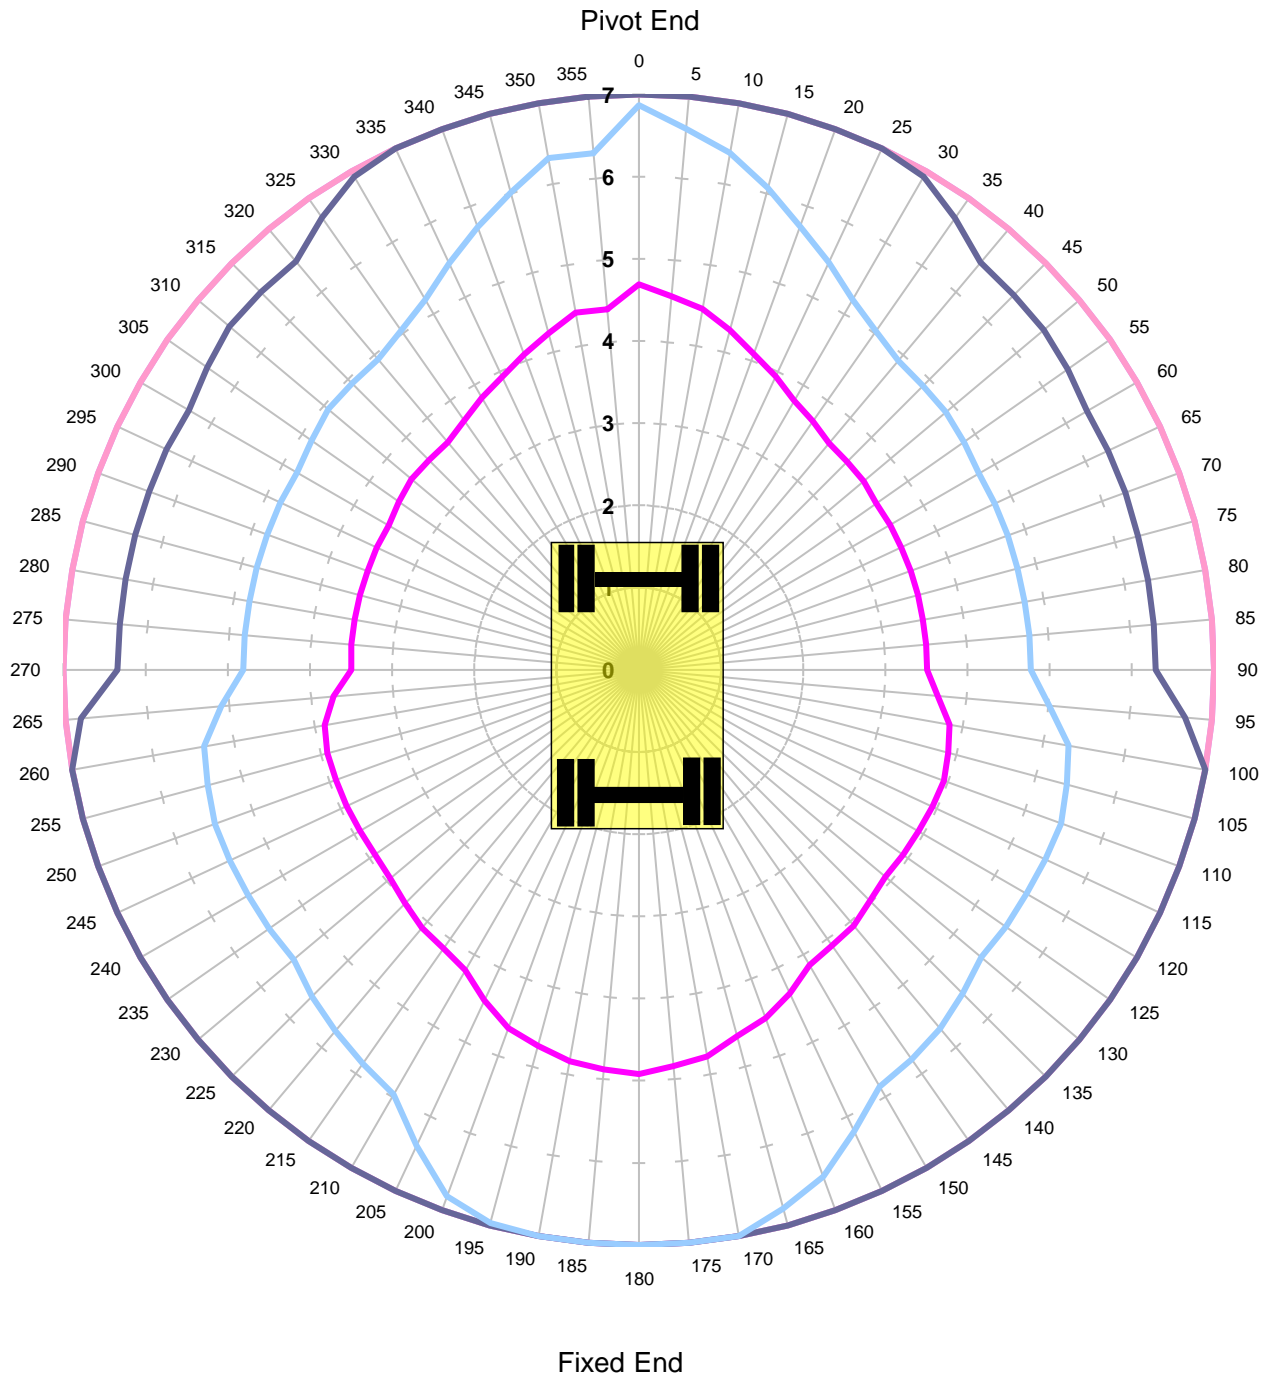

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	71.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant -150mm - Tandem Lift

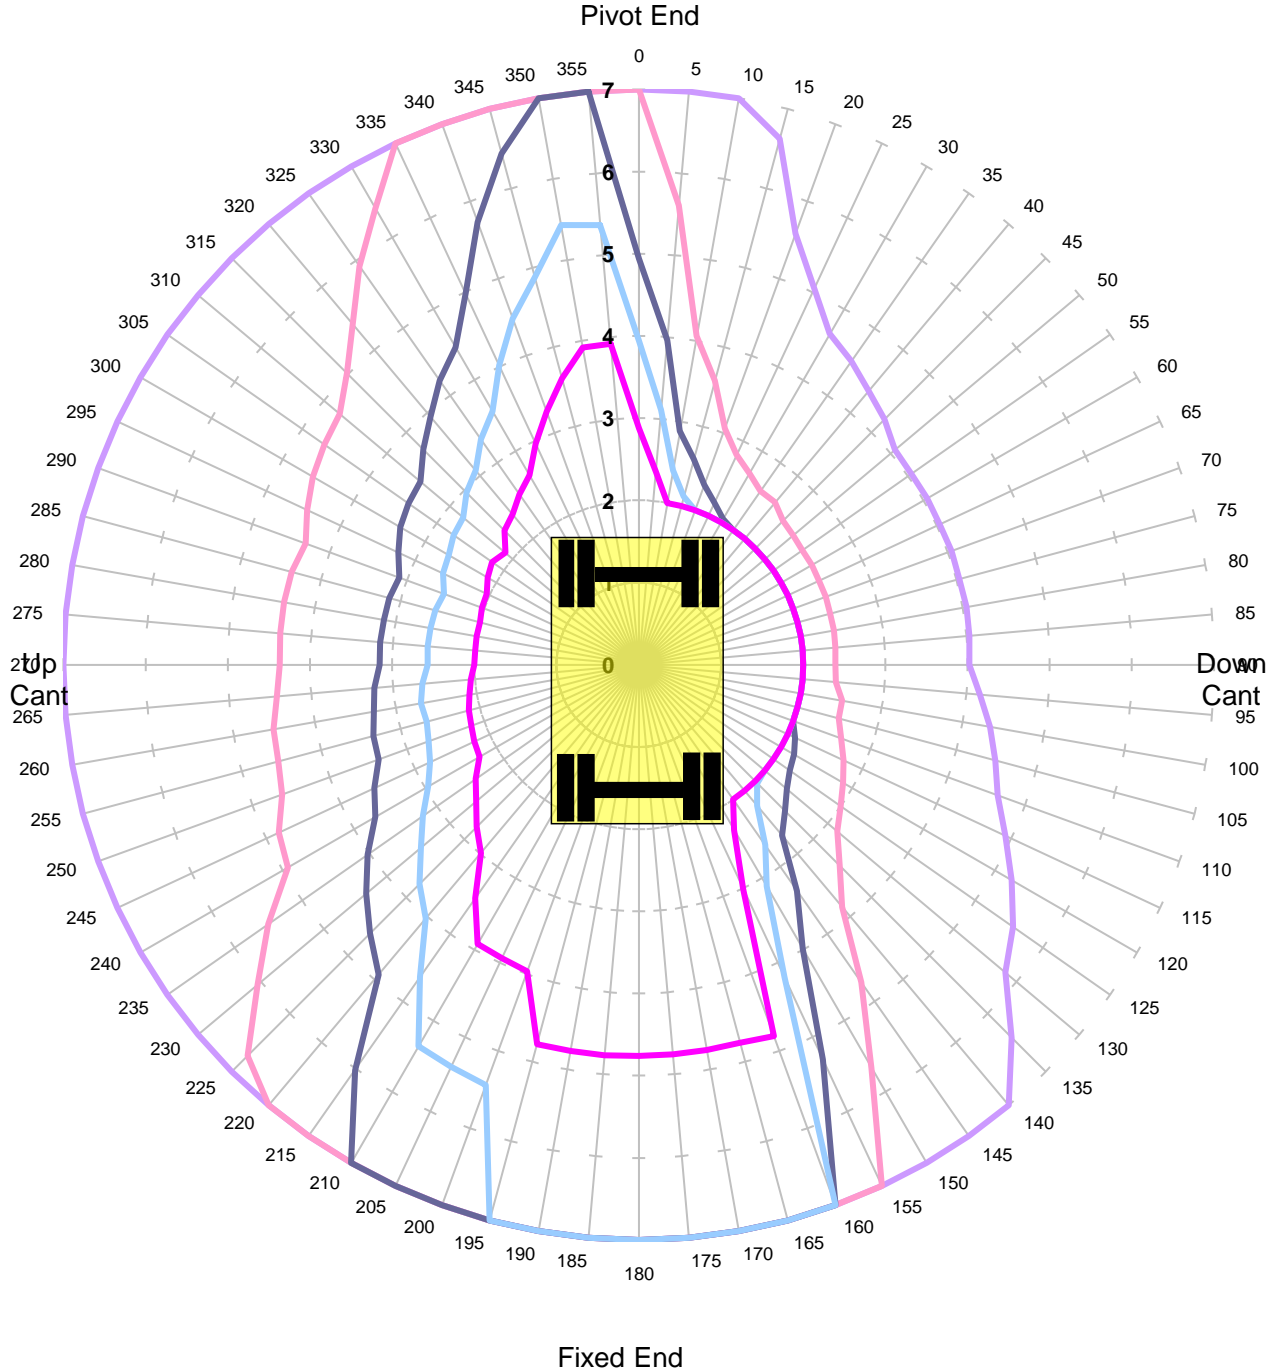

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant -50mm - Tandem Lift

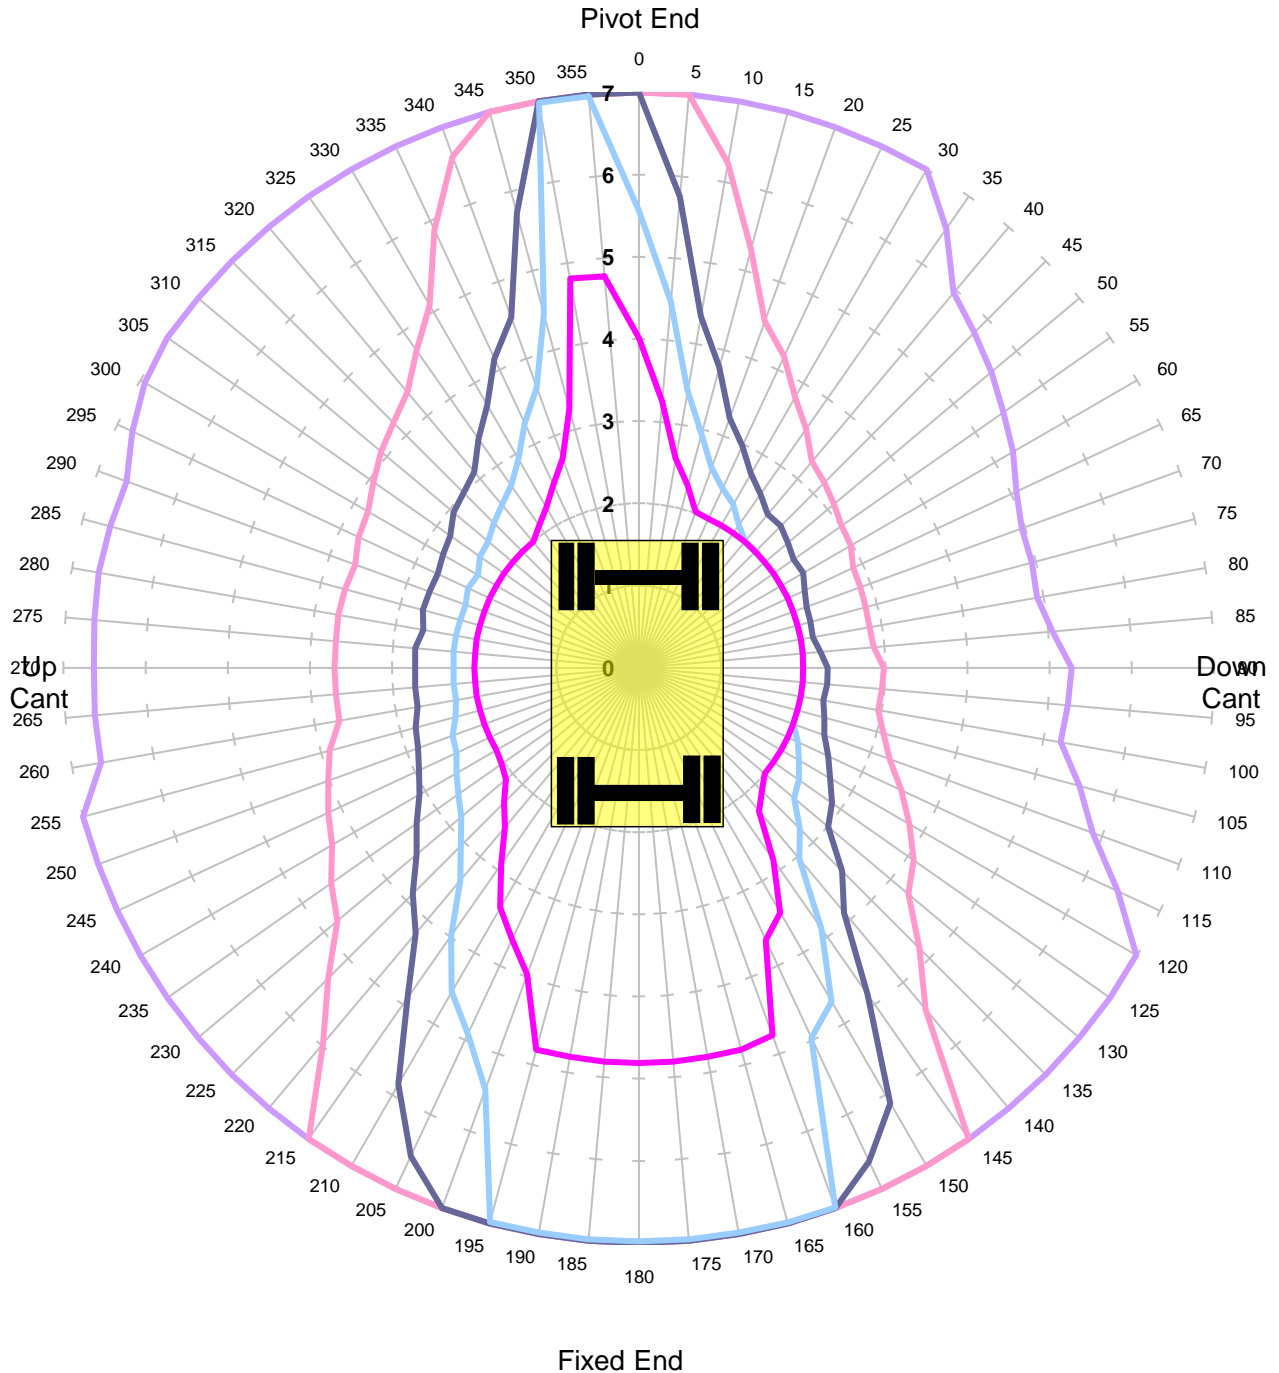

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant 50mm - Tandem Lift

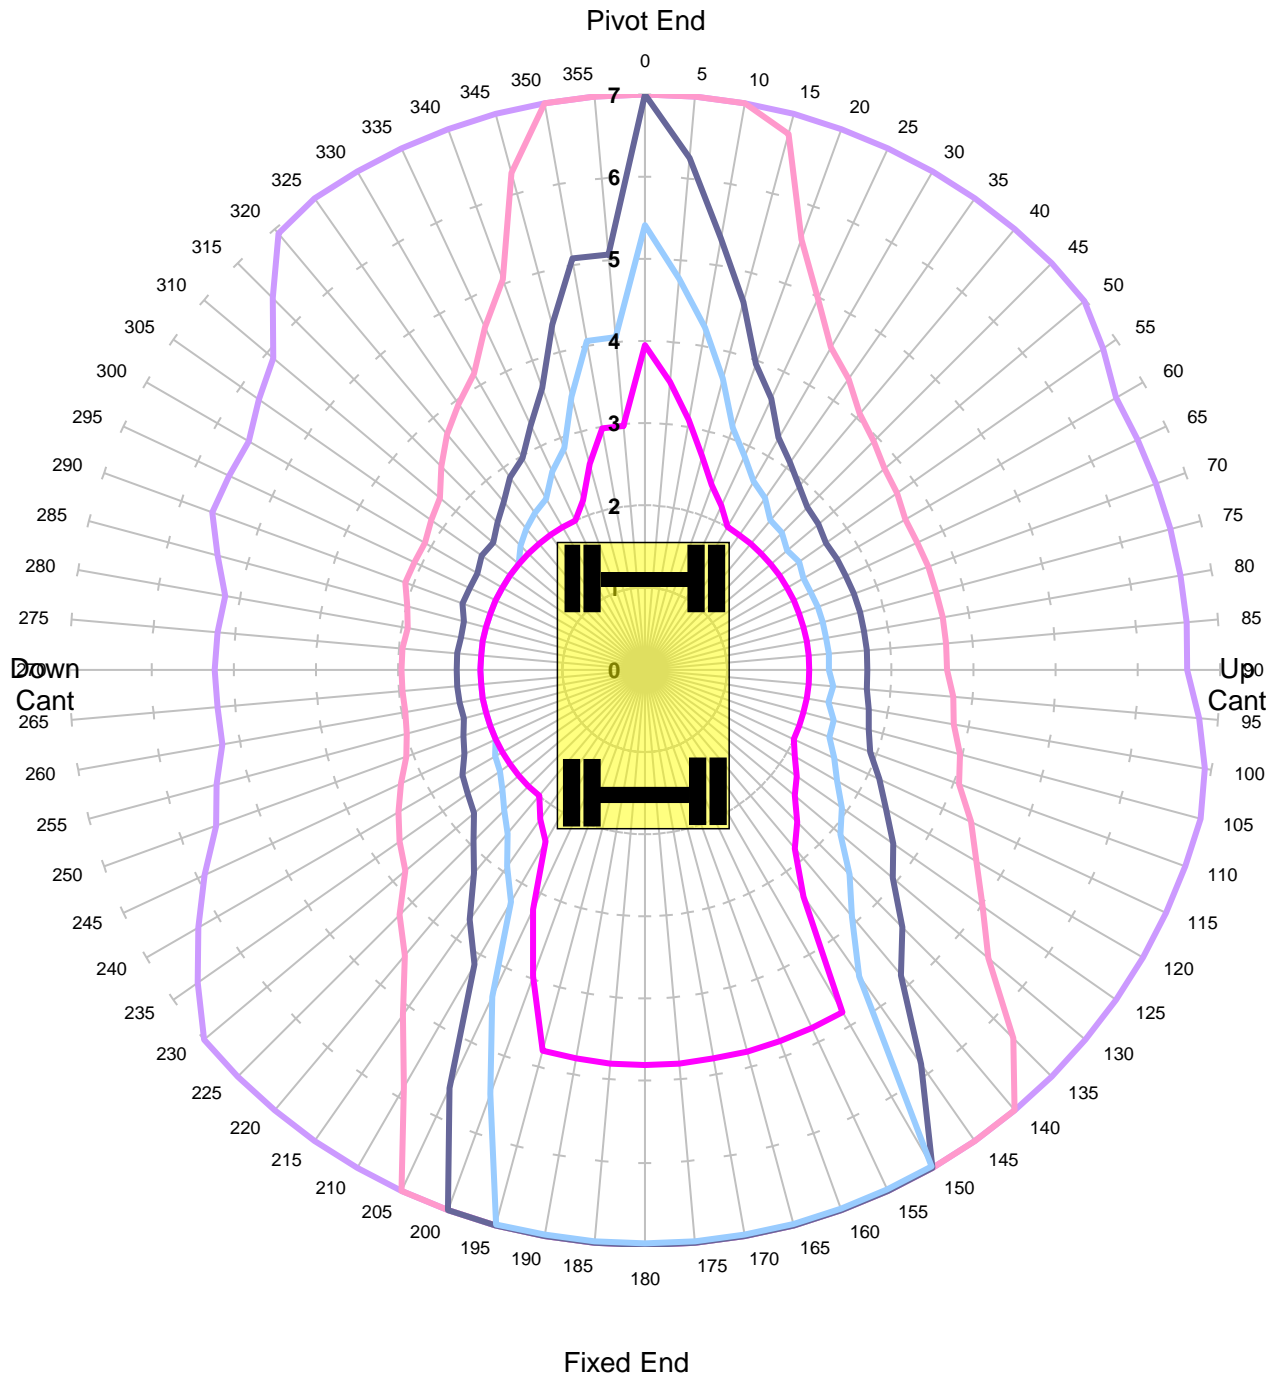

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant 150mm - Tandem Lift

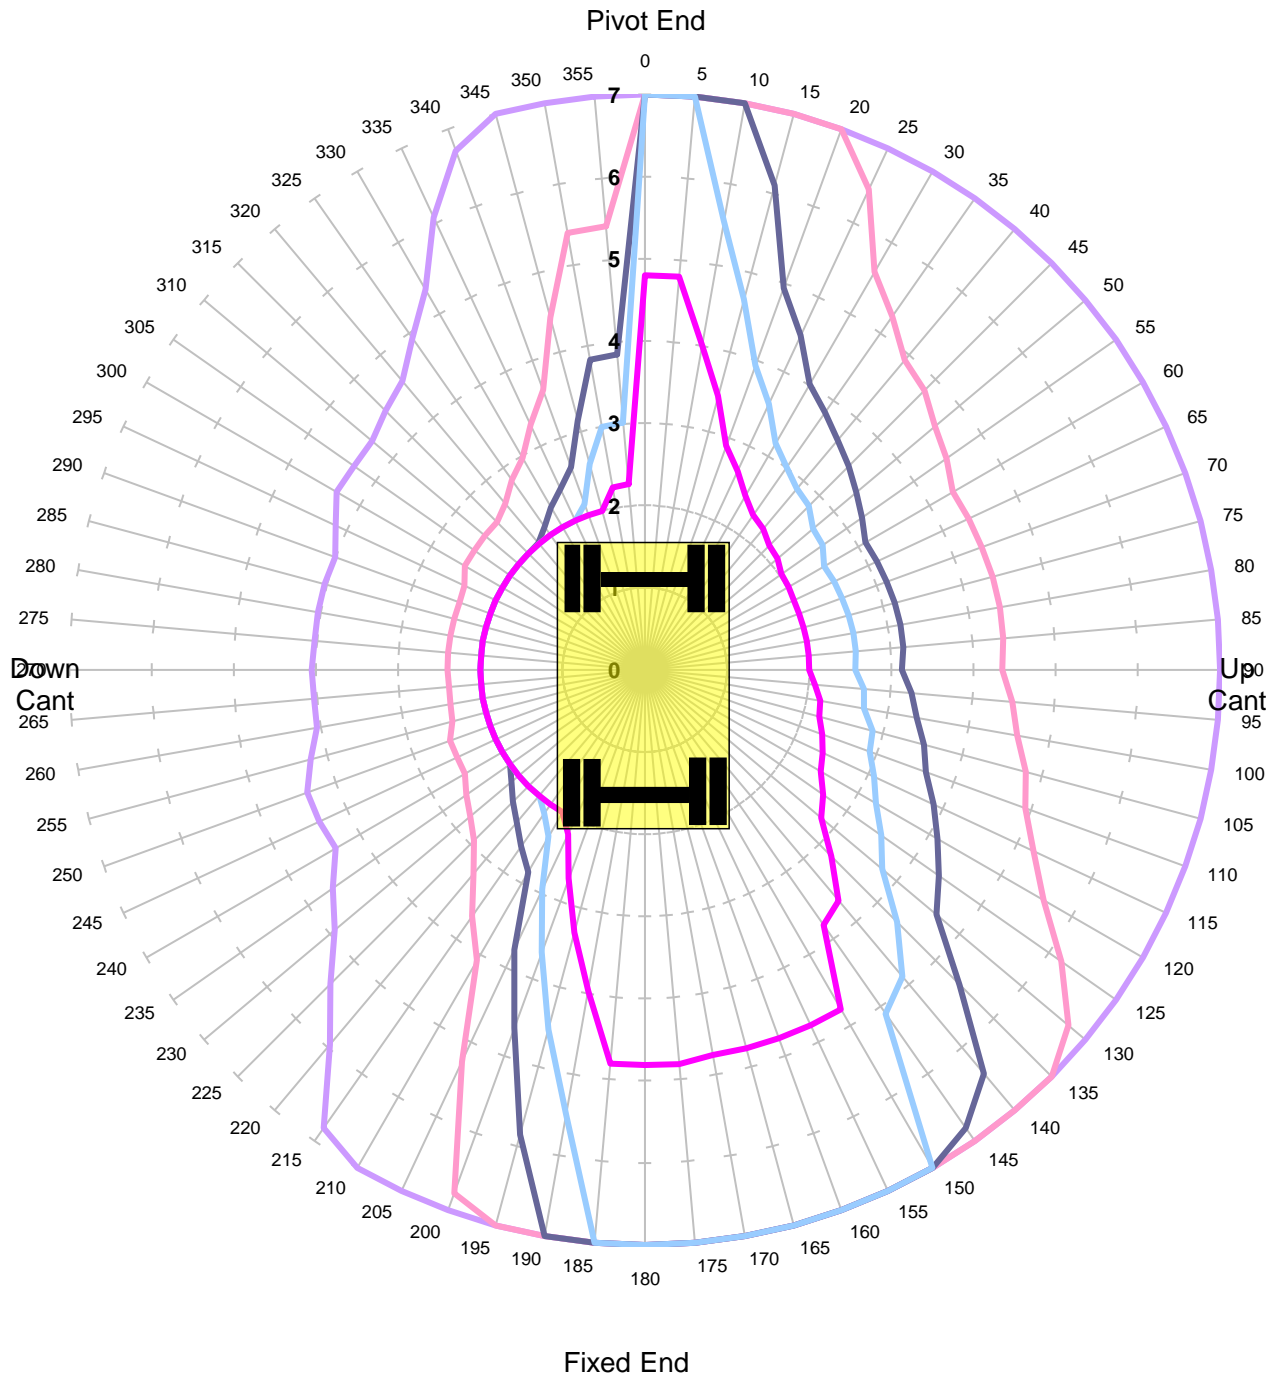

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant -150mm - Tandem Lift

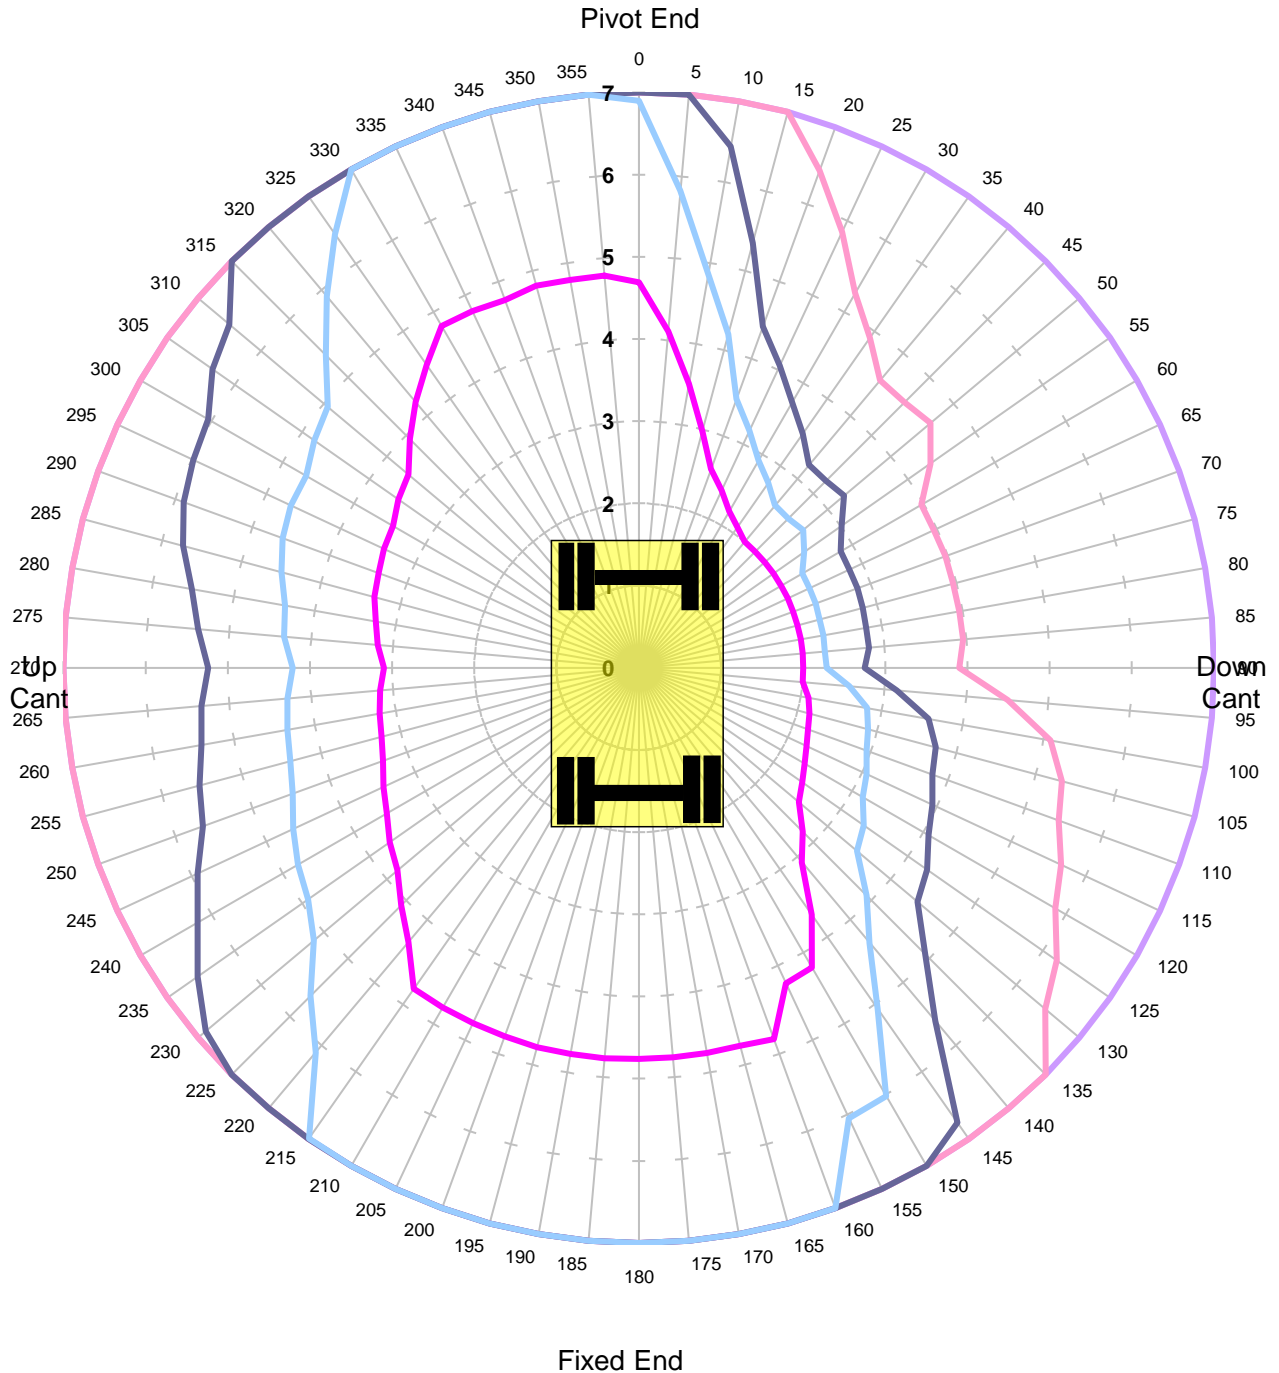

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant -50mm - Tandem Lift

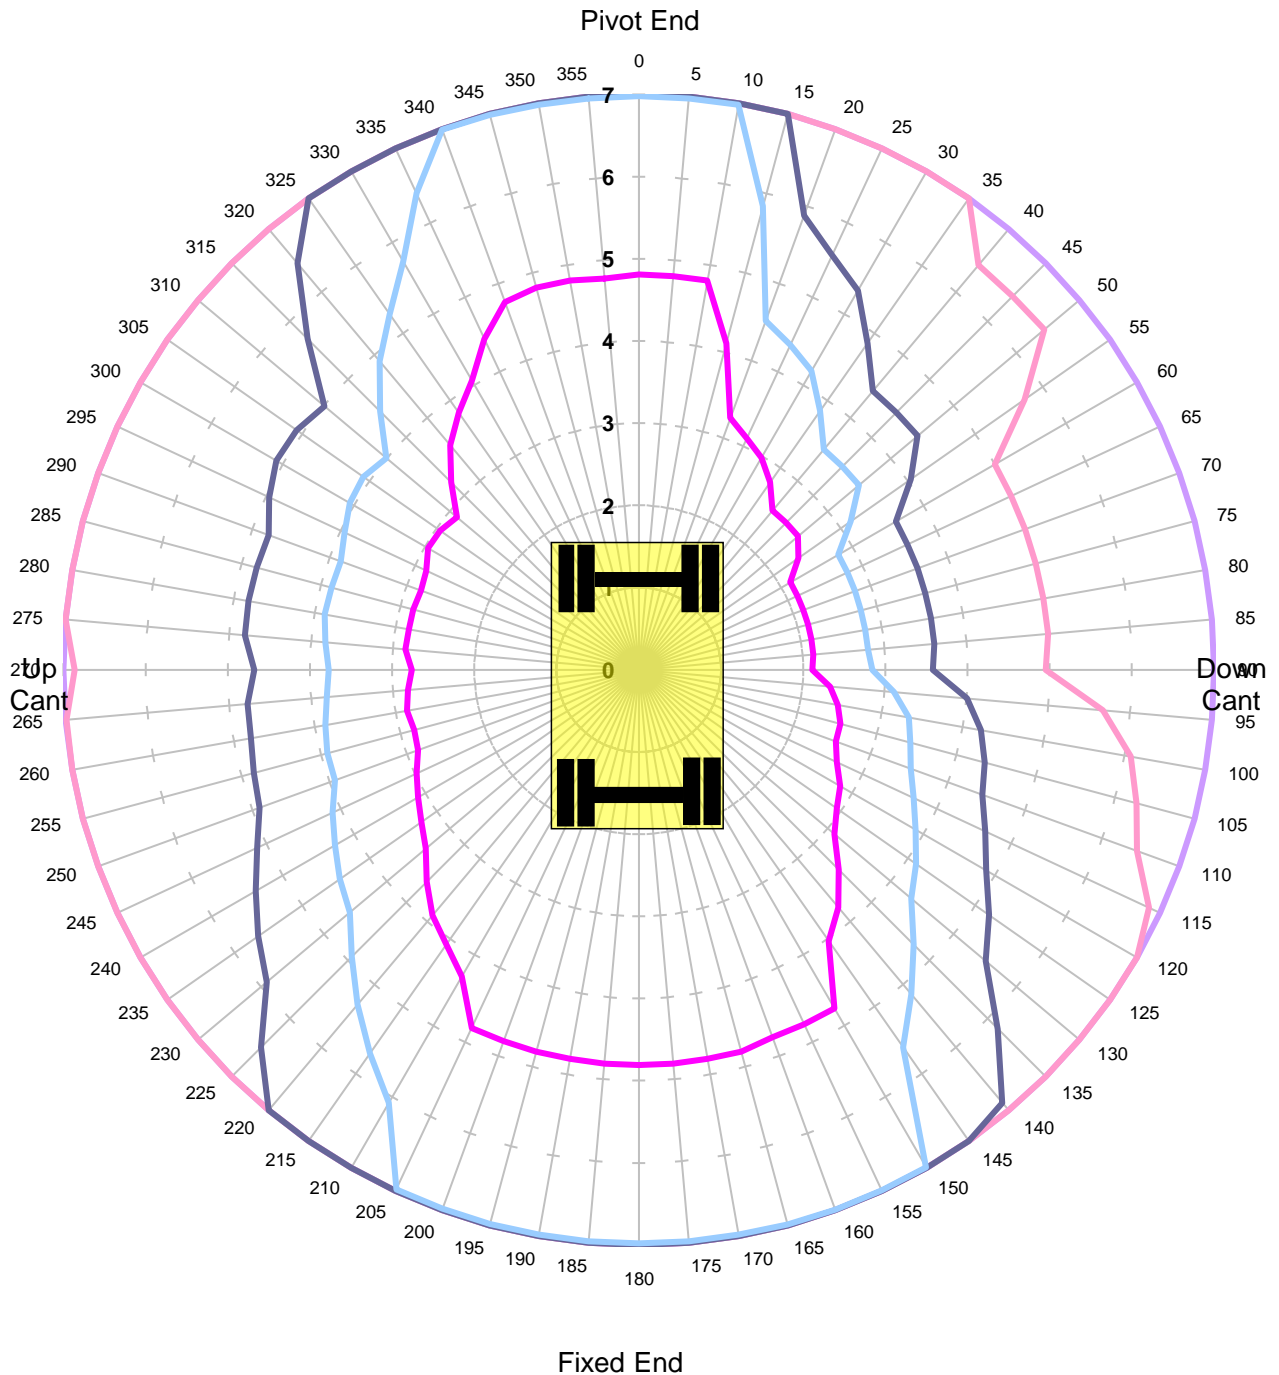


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 50mm - Tandem Lift**

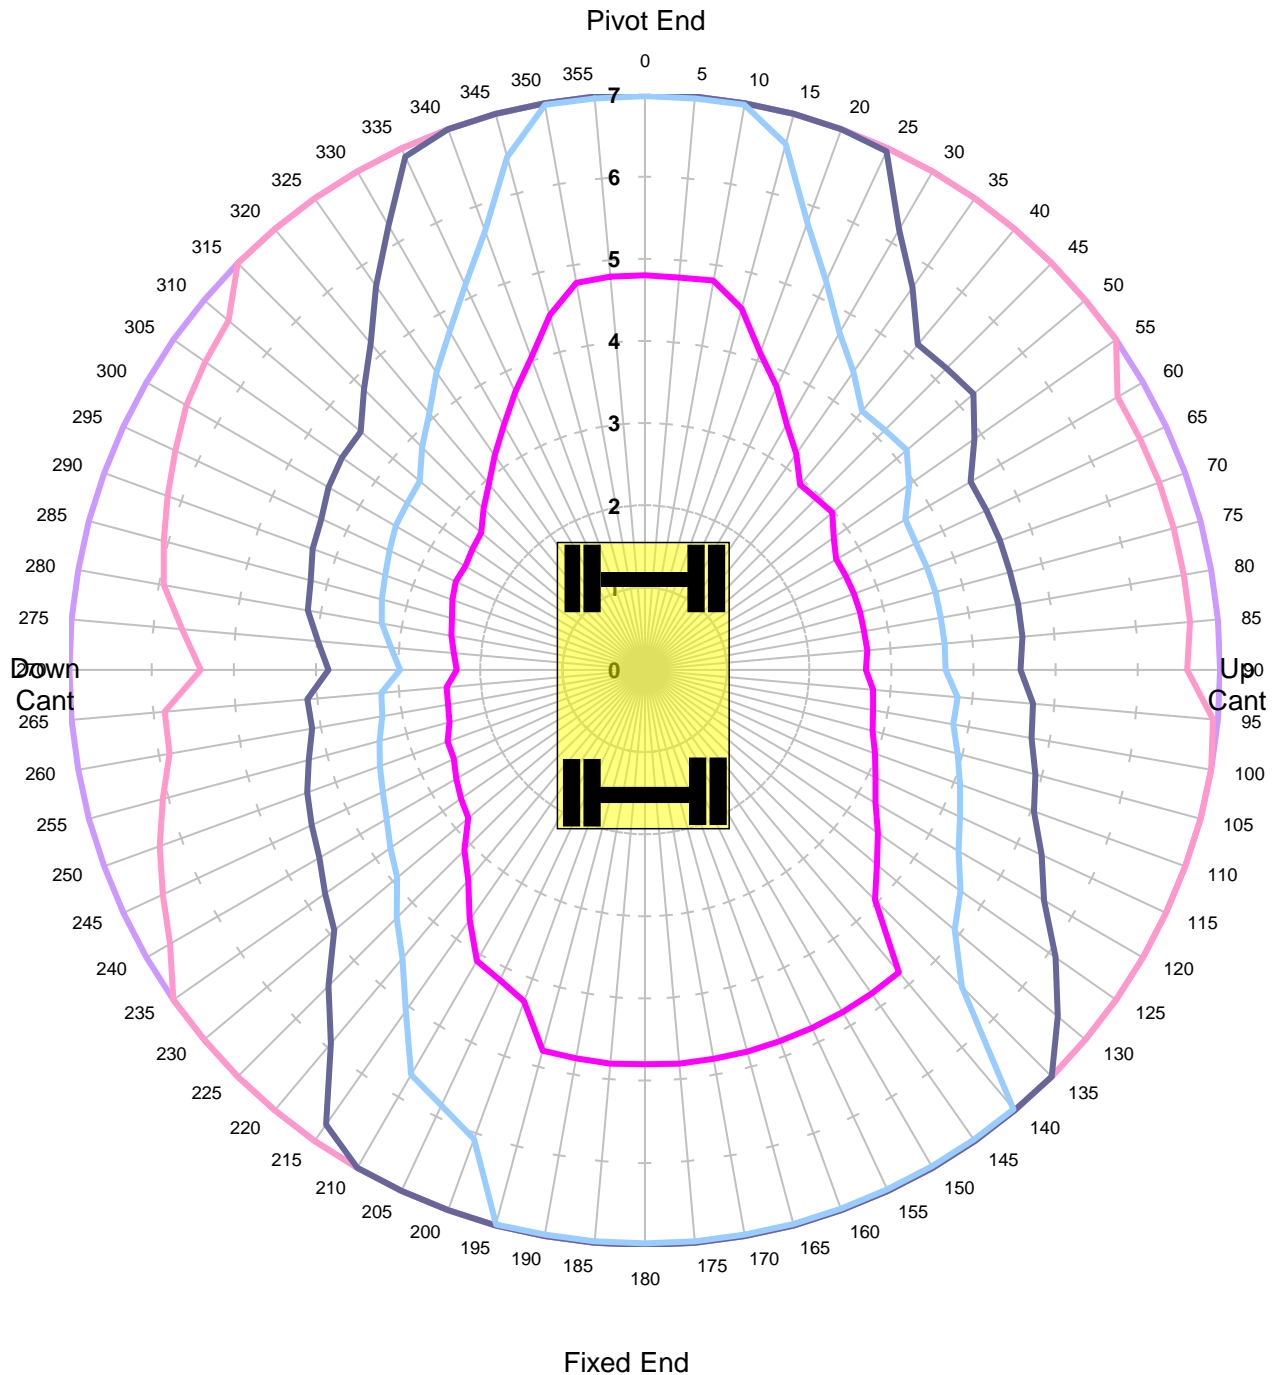

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant 150mm - Tandem Lift

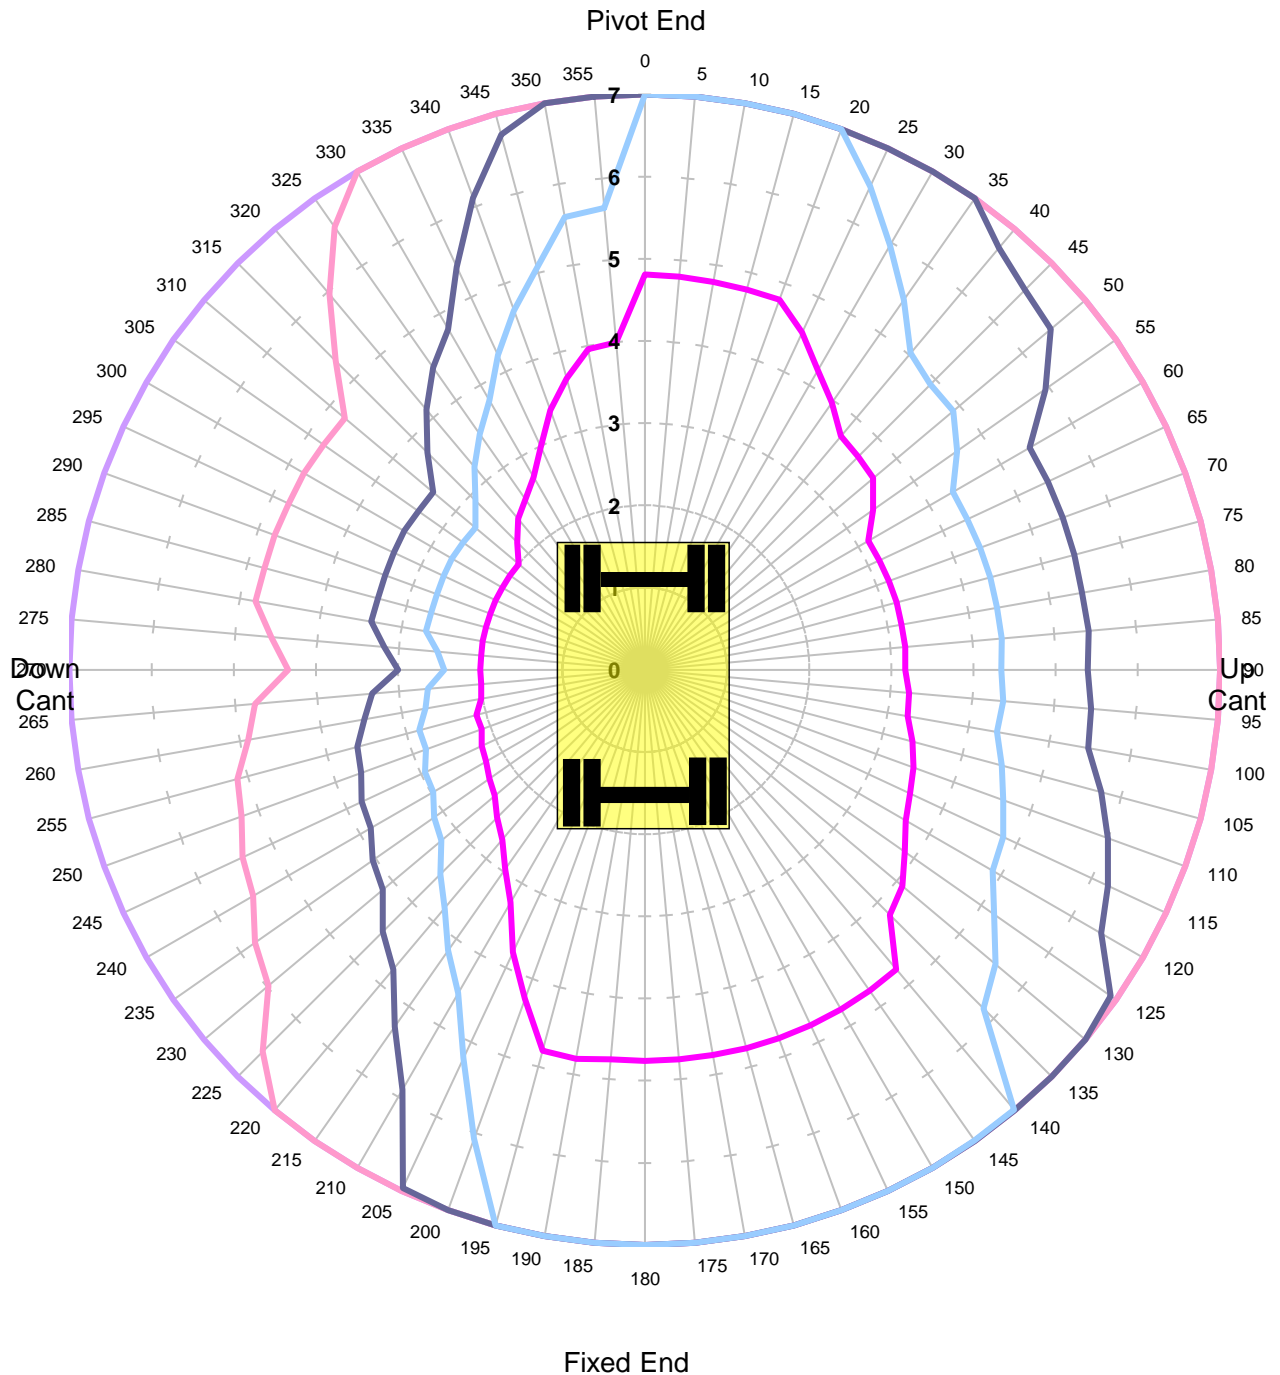

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift BP**

Unlocked Road - Tandem Lift

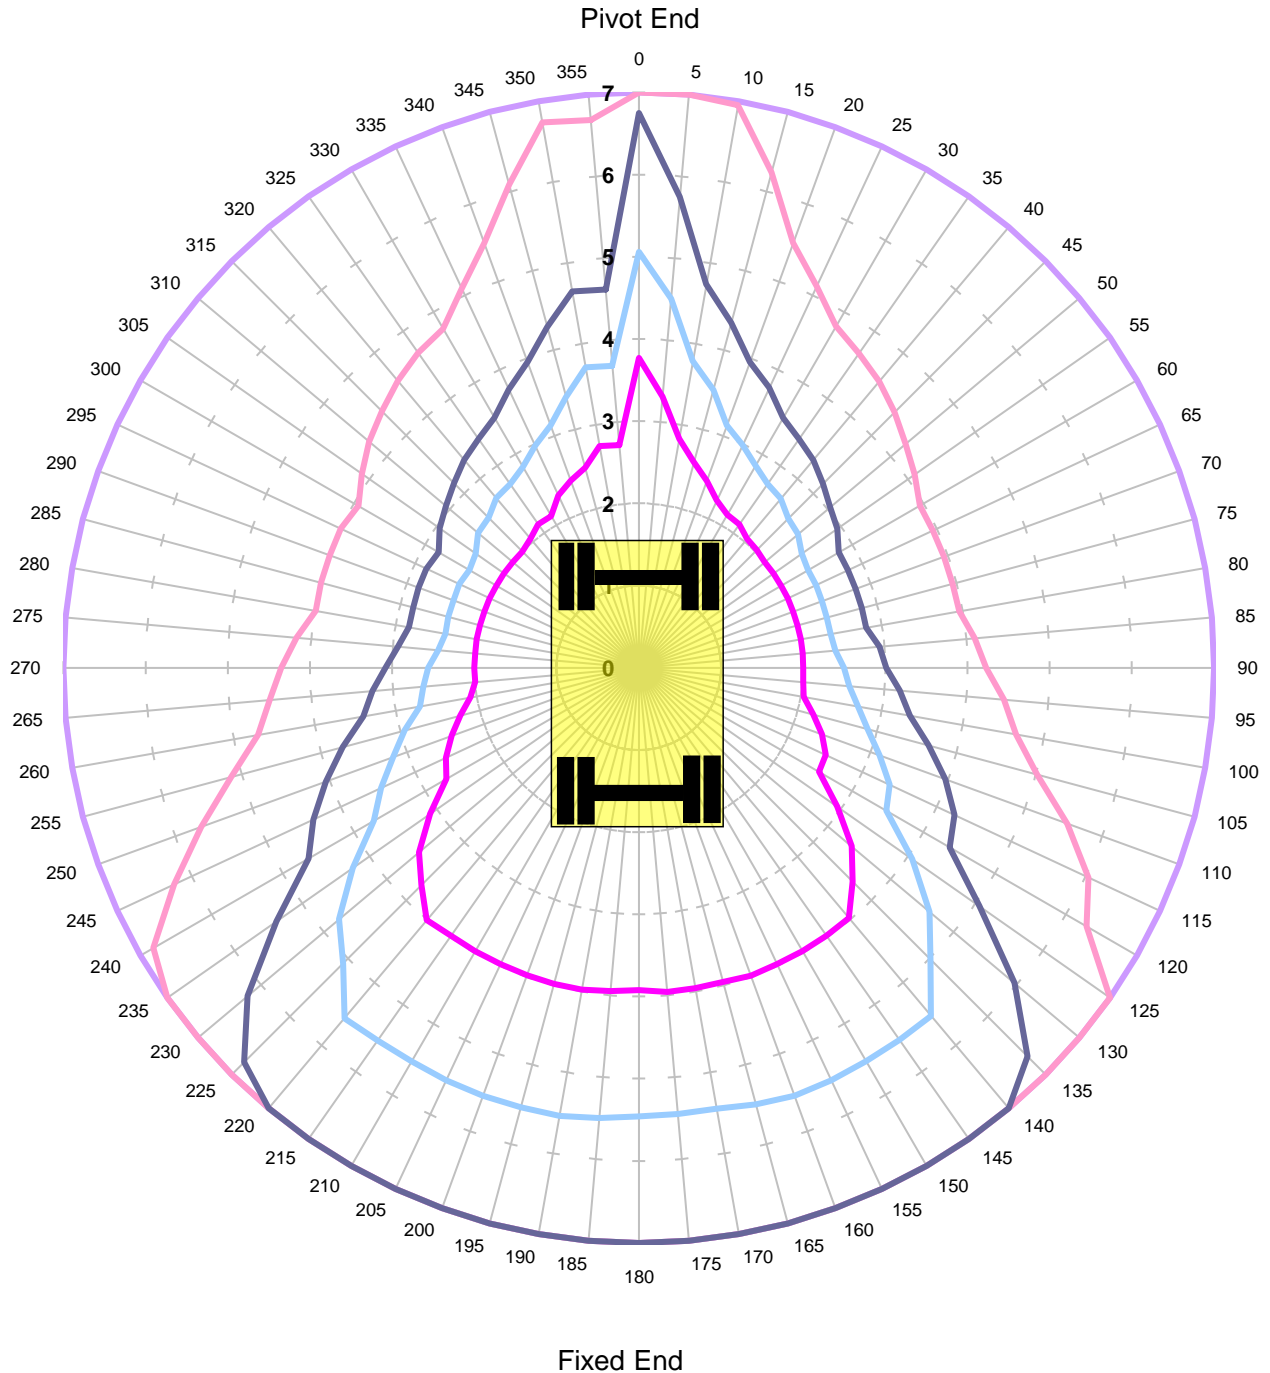

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	47.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift BP**

Locked Road - Tandem Lift

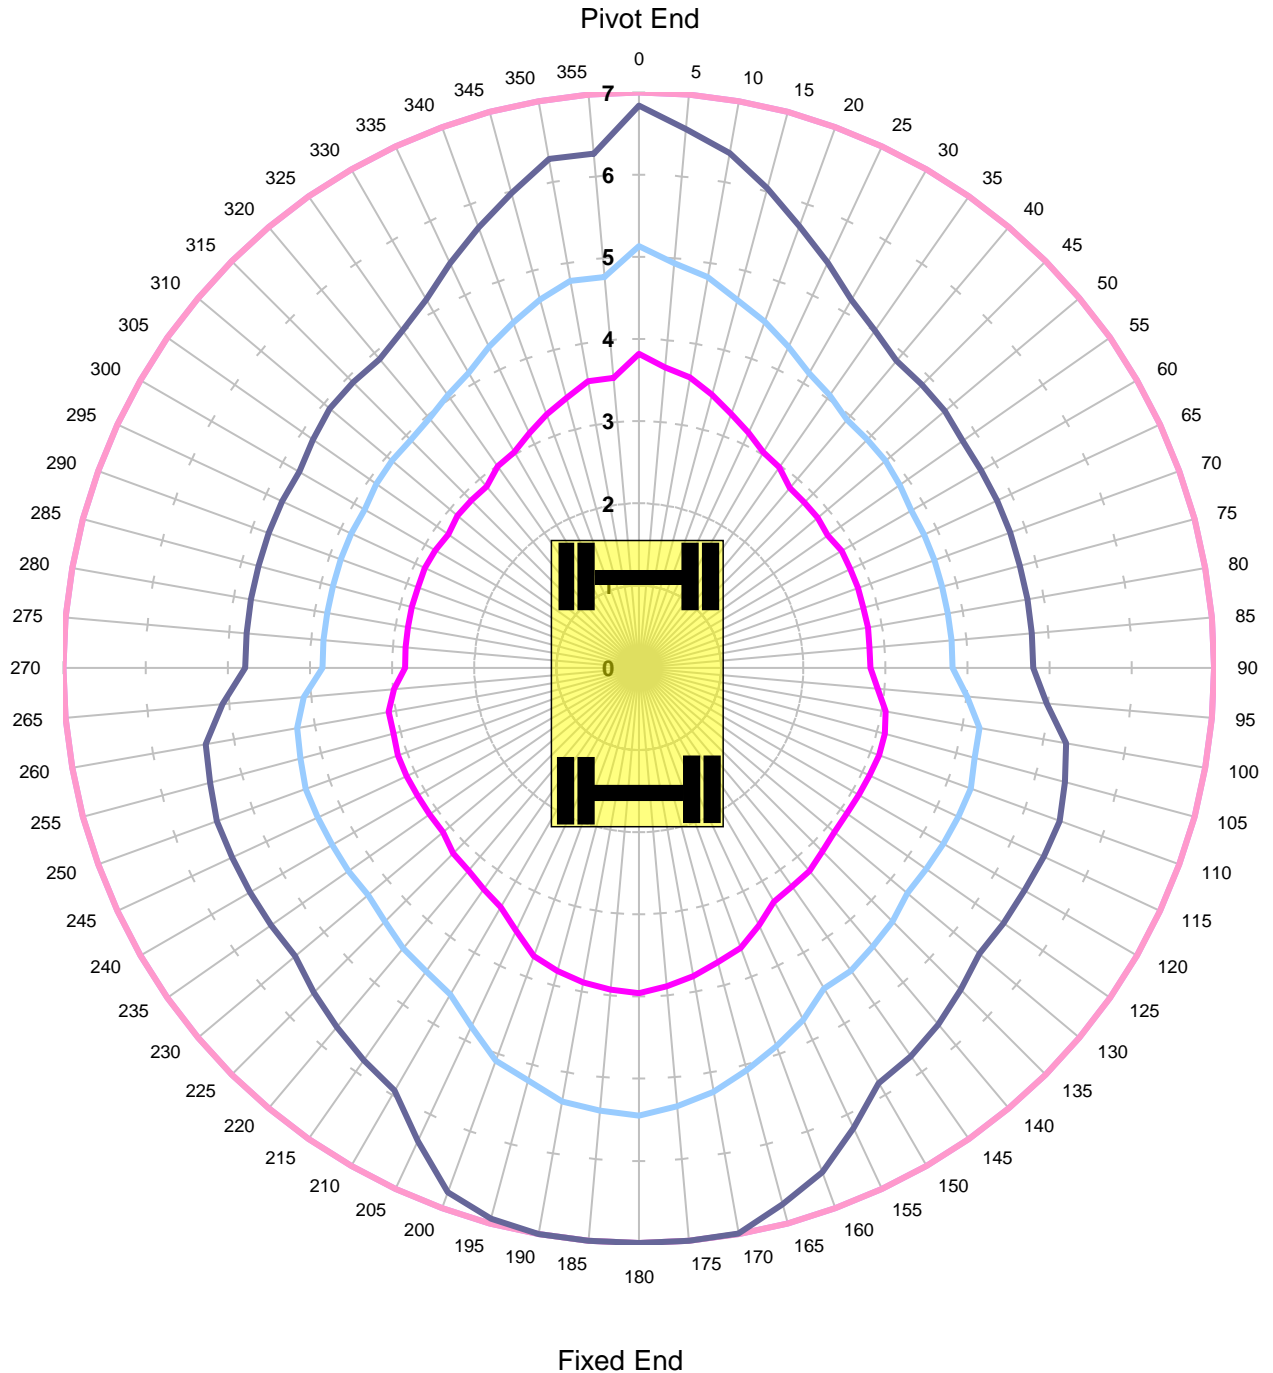

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	47.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant -150mm

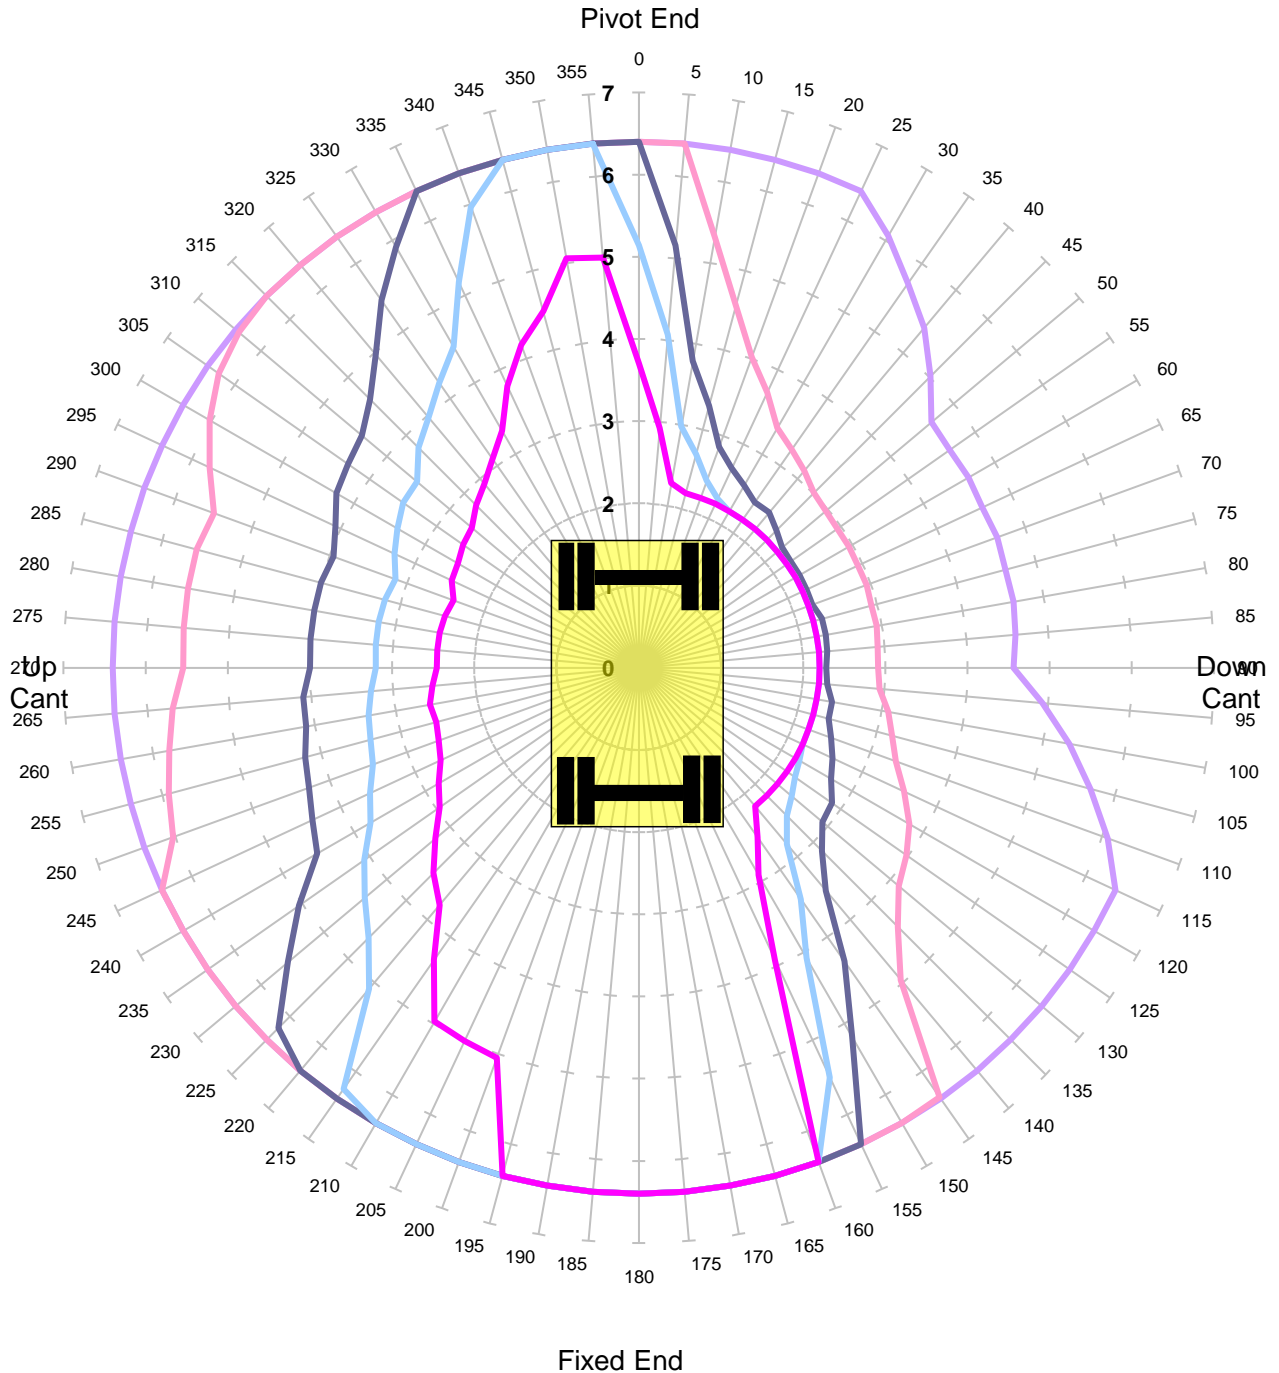

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant -50mm

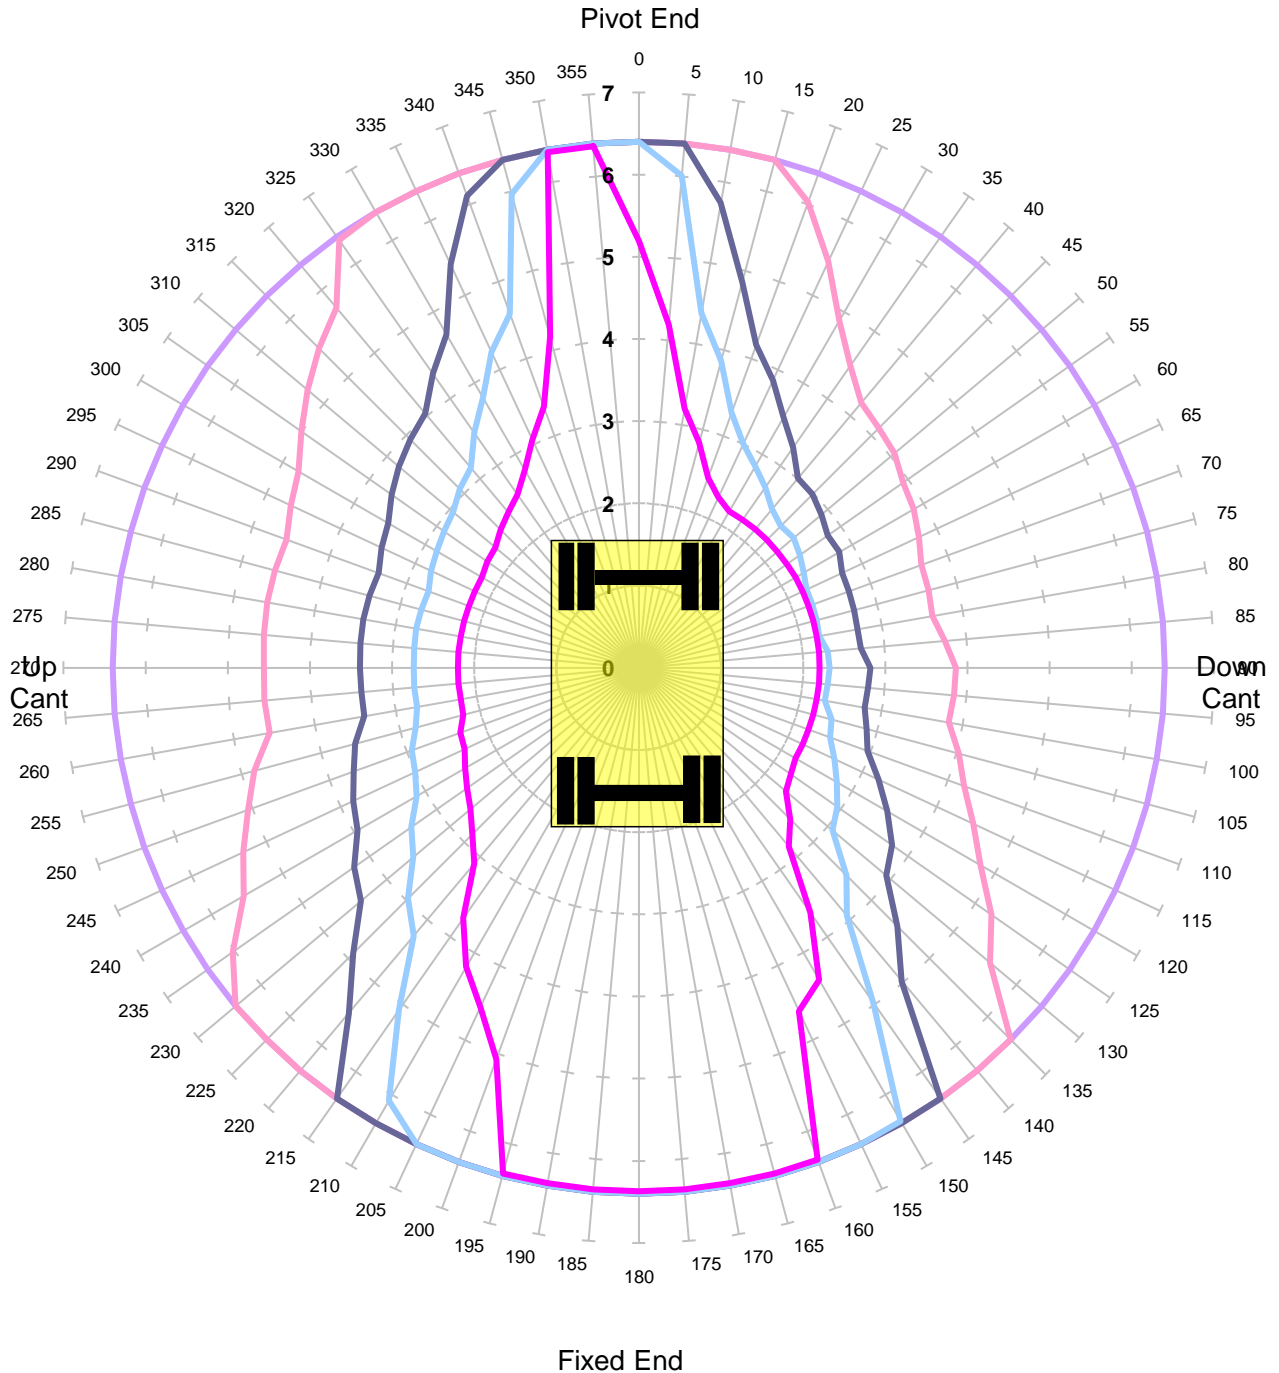


MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant 50mm

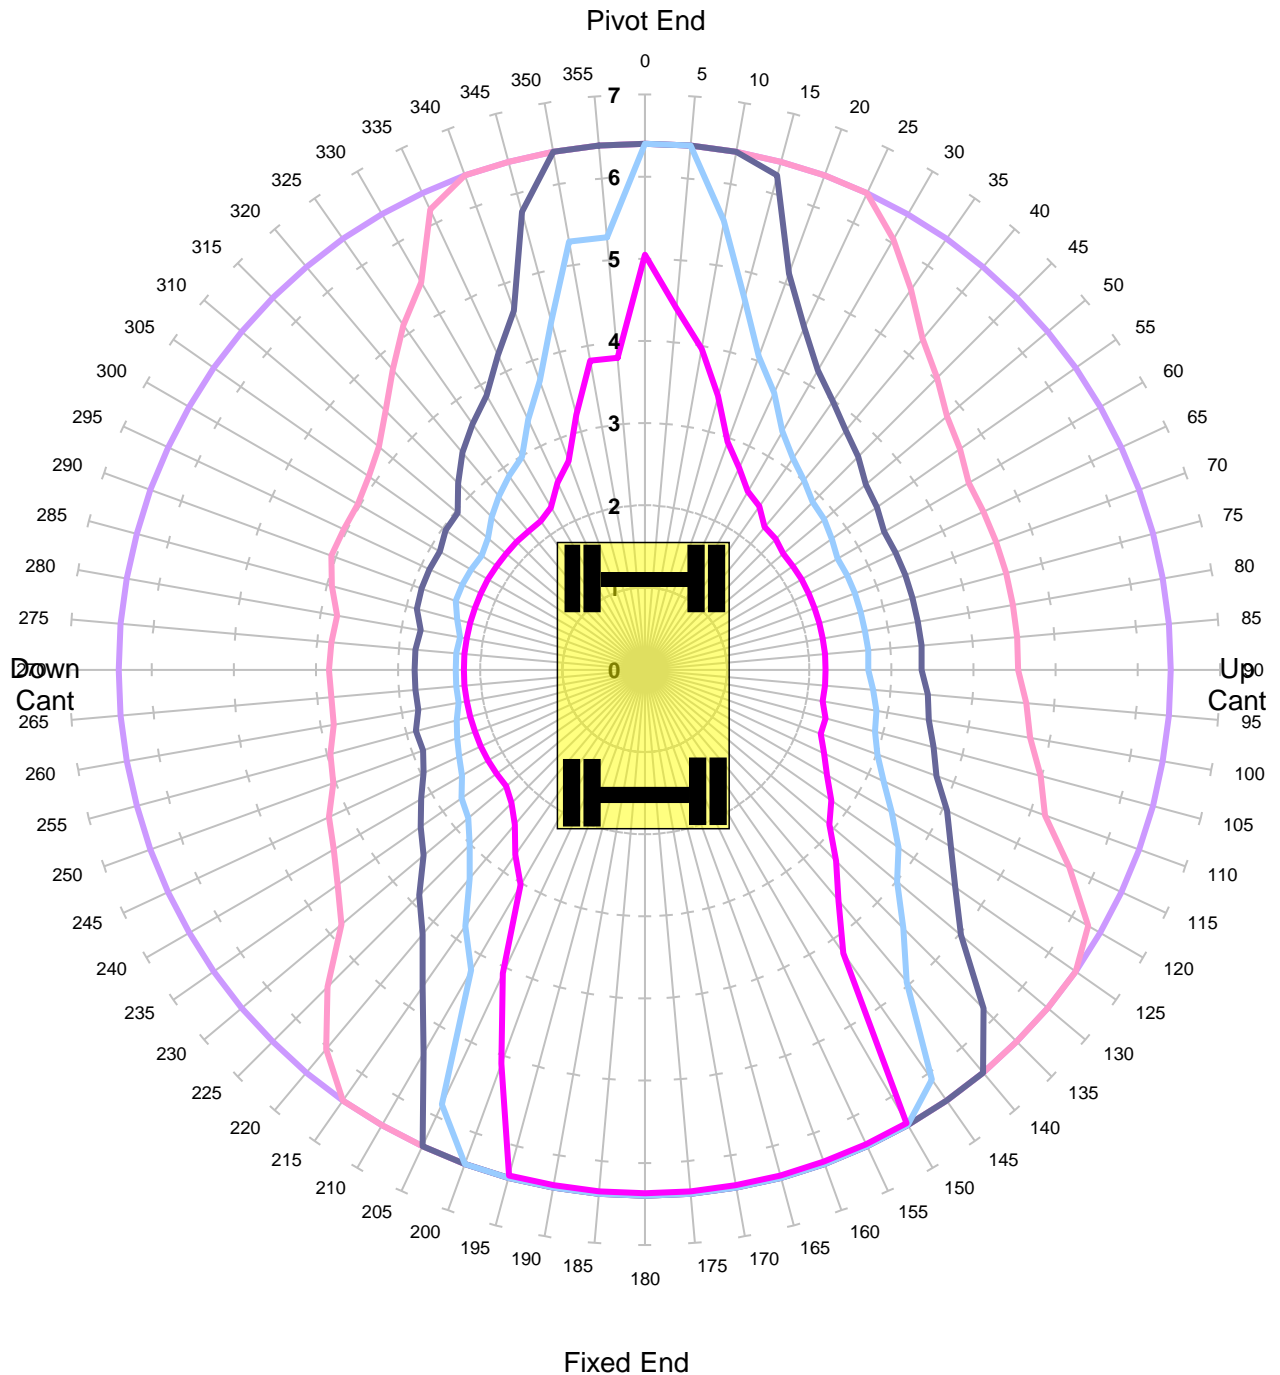

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant 150mm

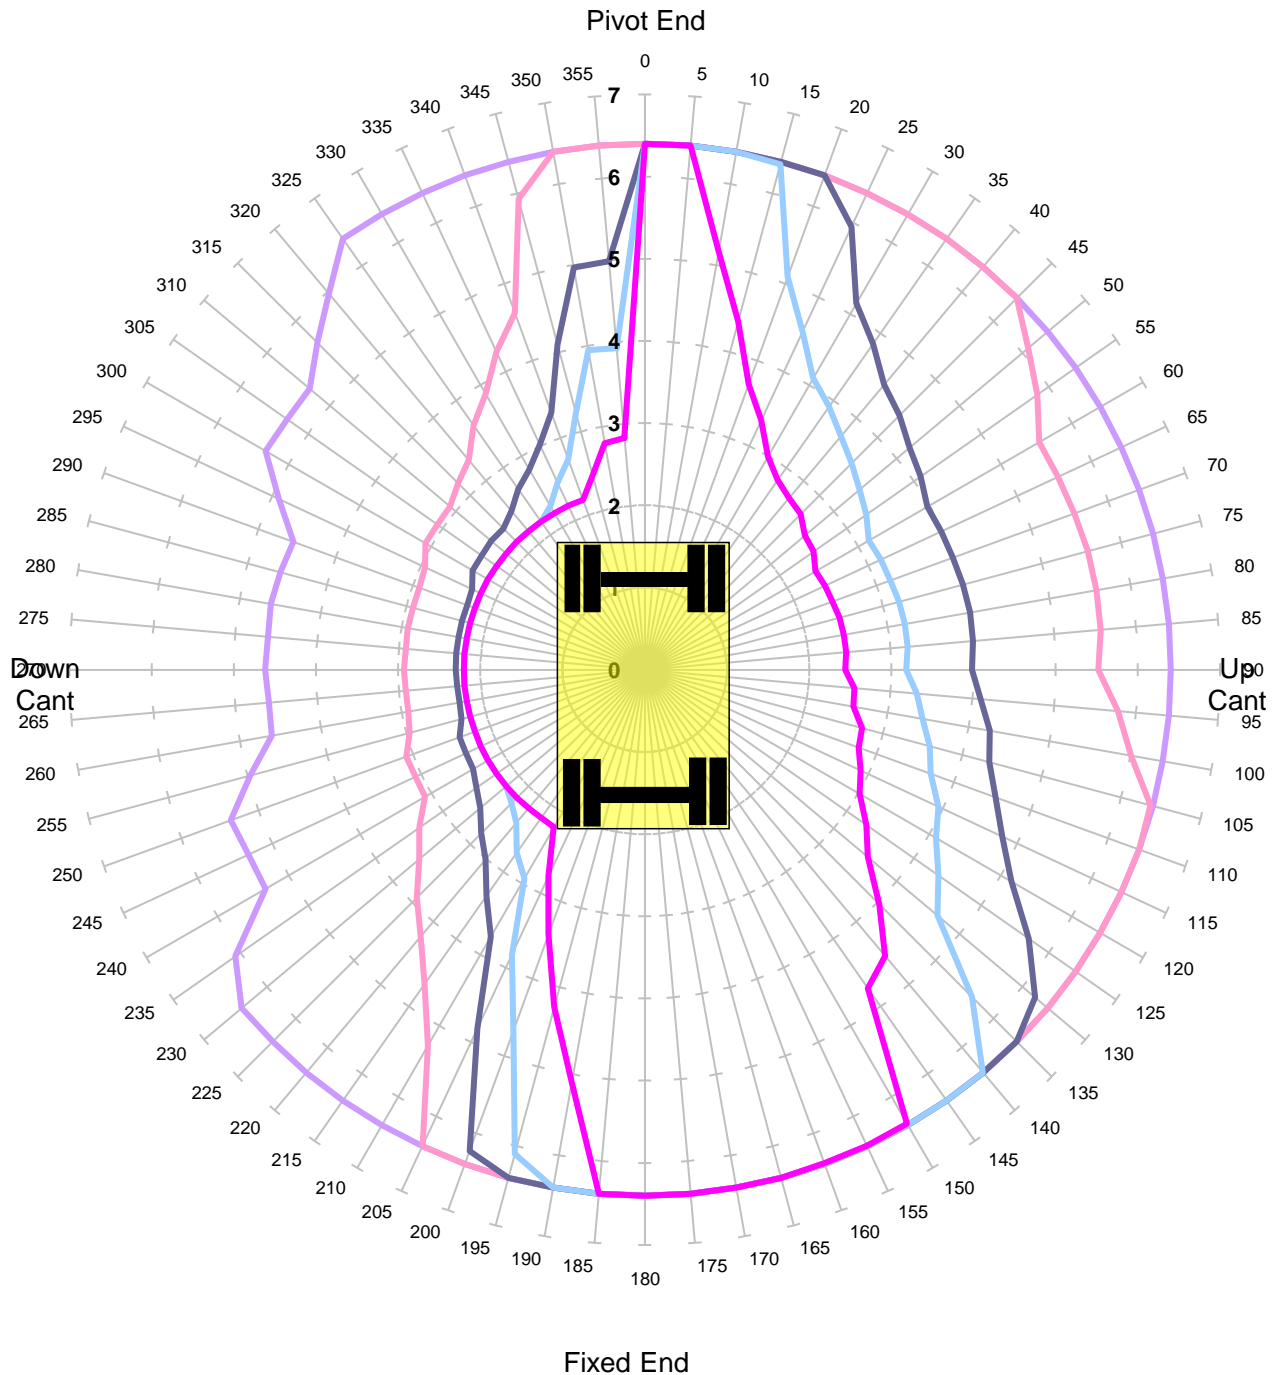

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Locked Rail Cant -150mm

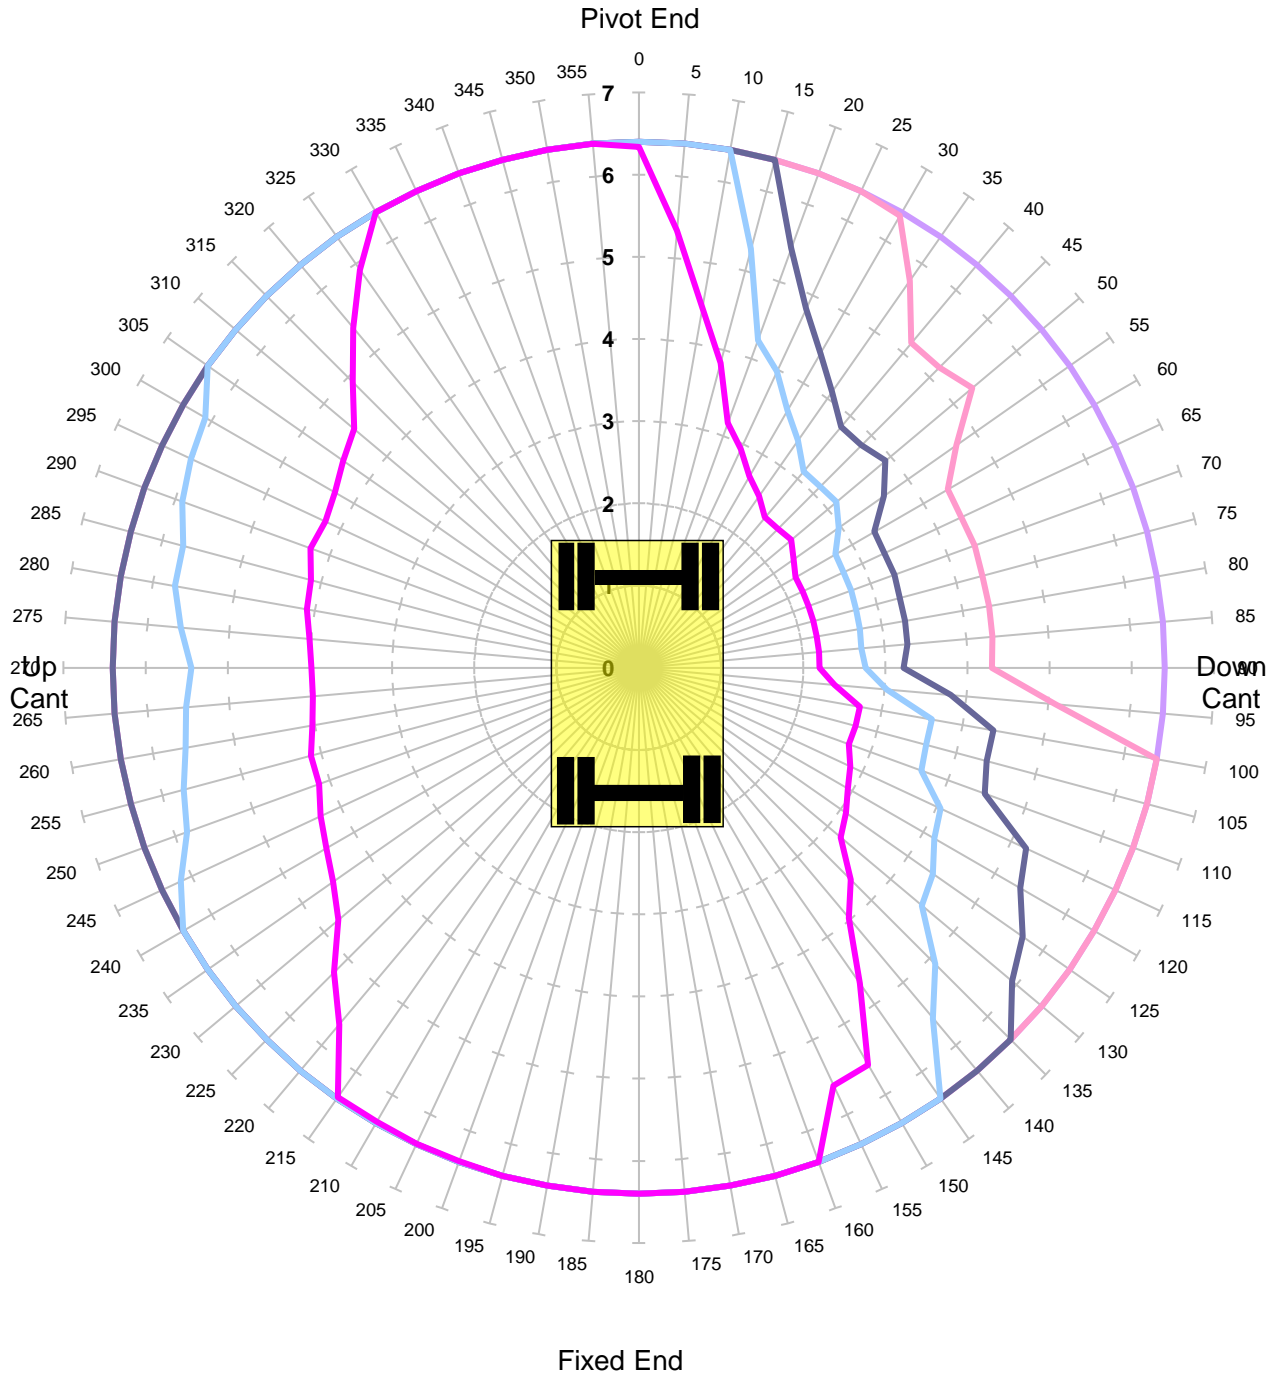

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Locked Rail Cant -50mm

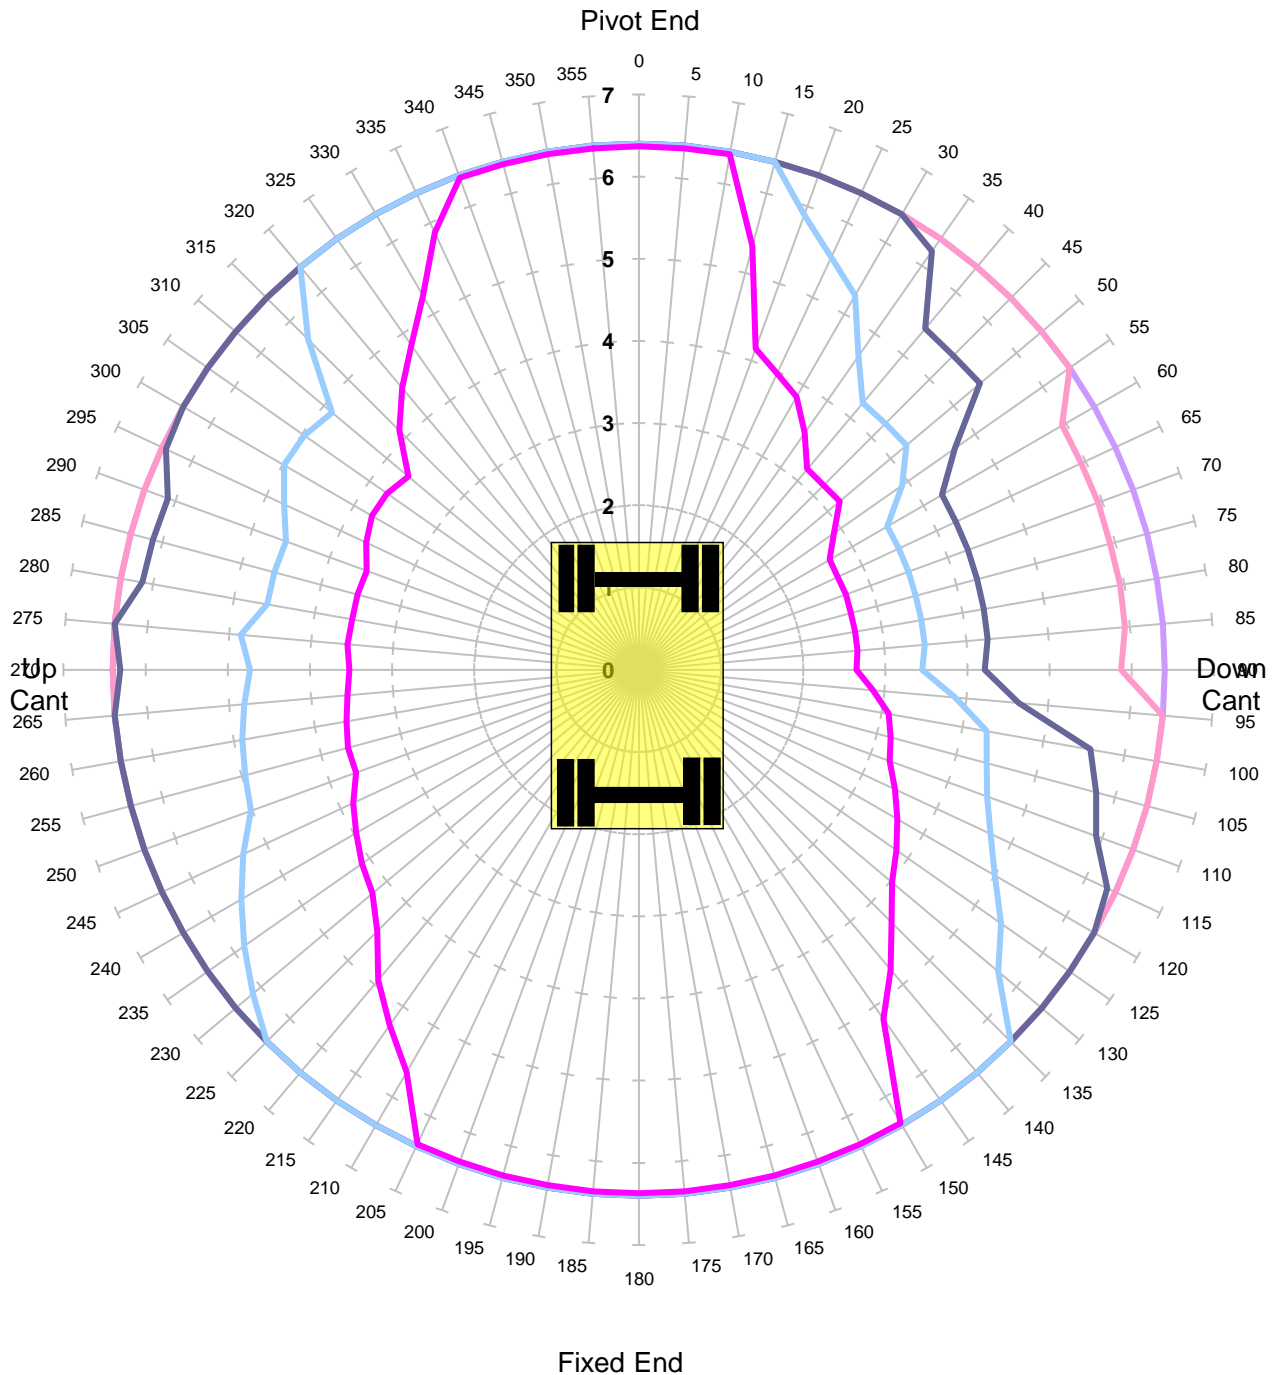

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Locked Rail Cant 50mm

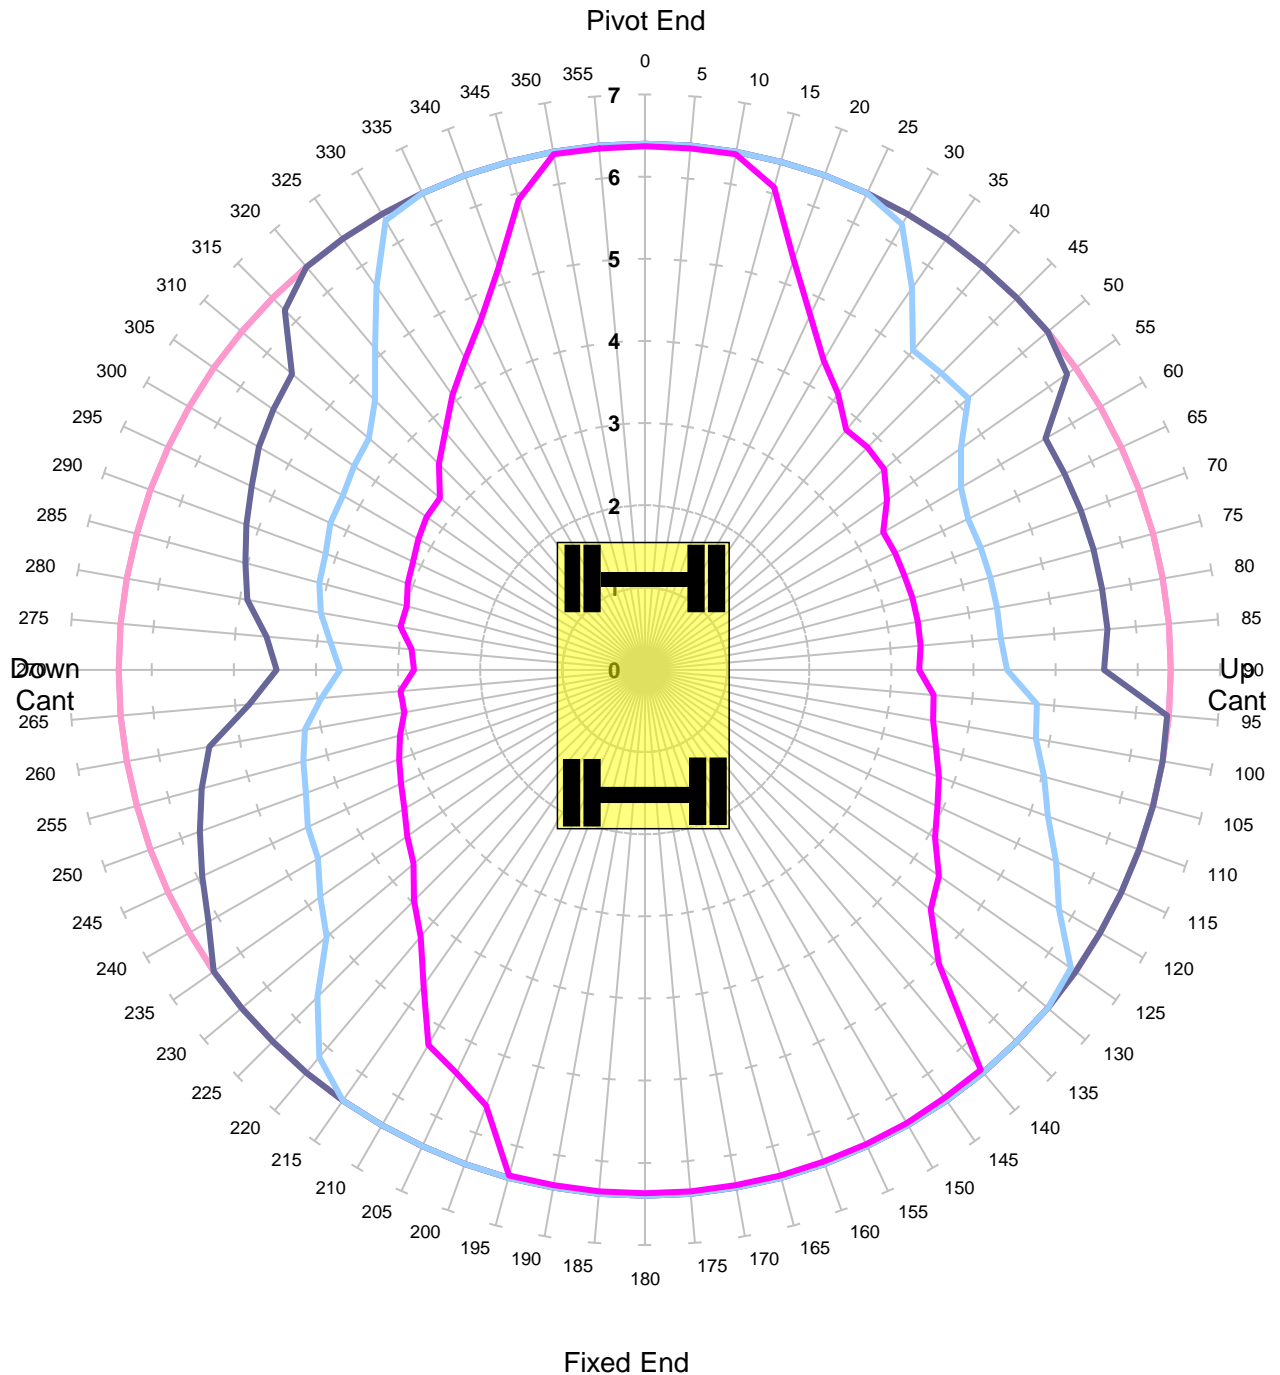

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Locked Rail Cant 150mm

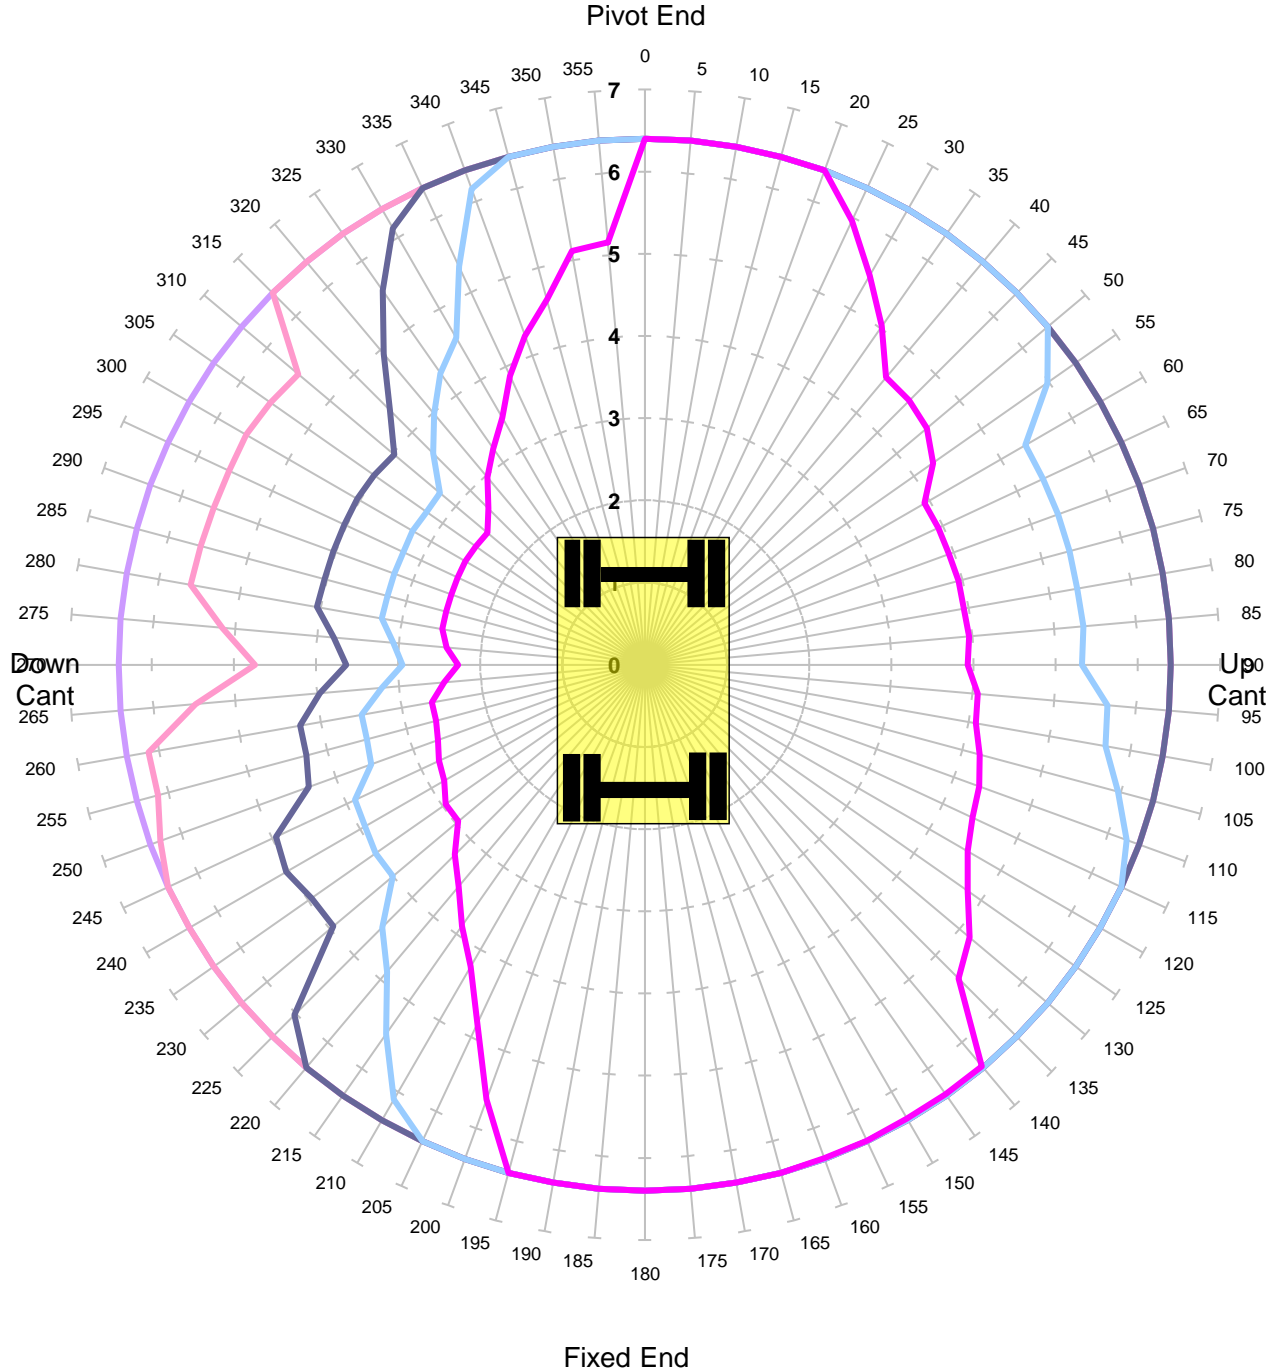


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift ALP1
Unlocked Road

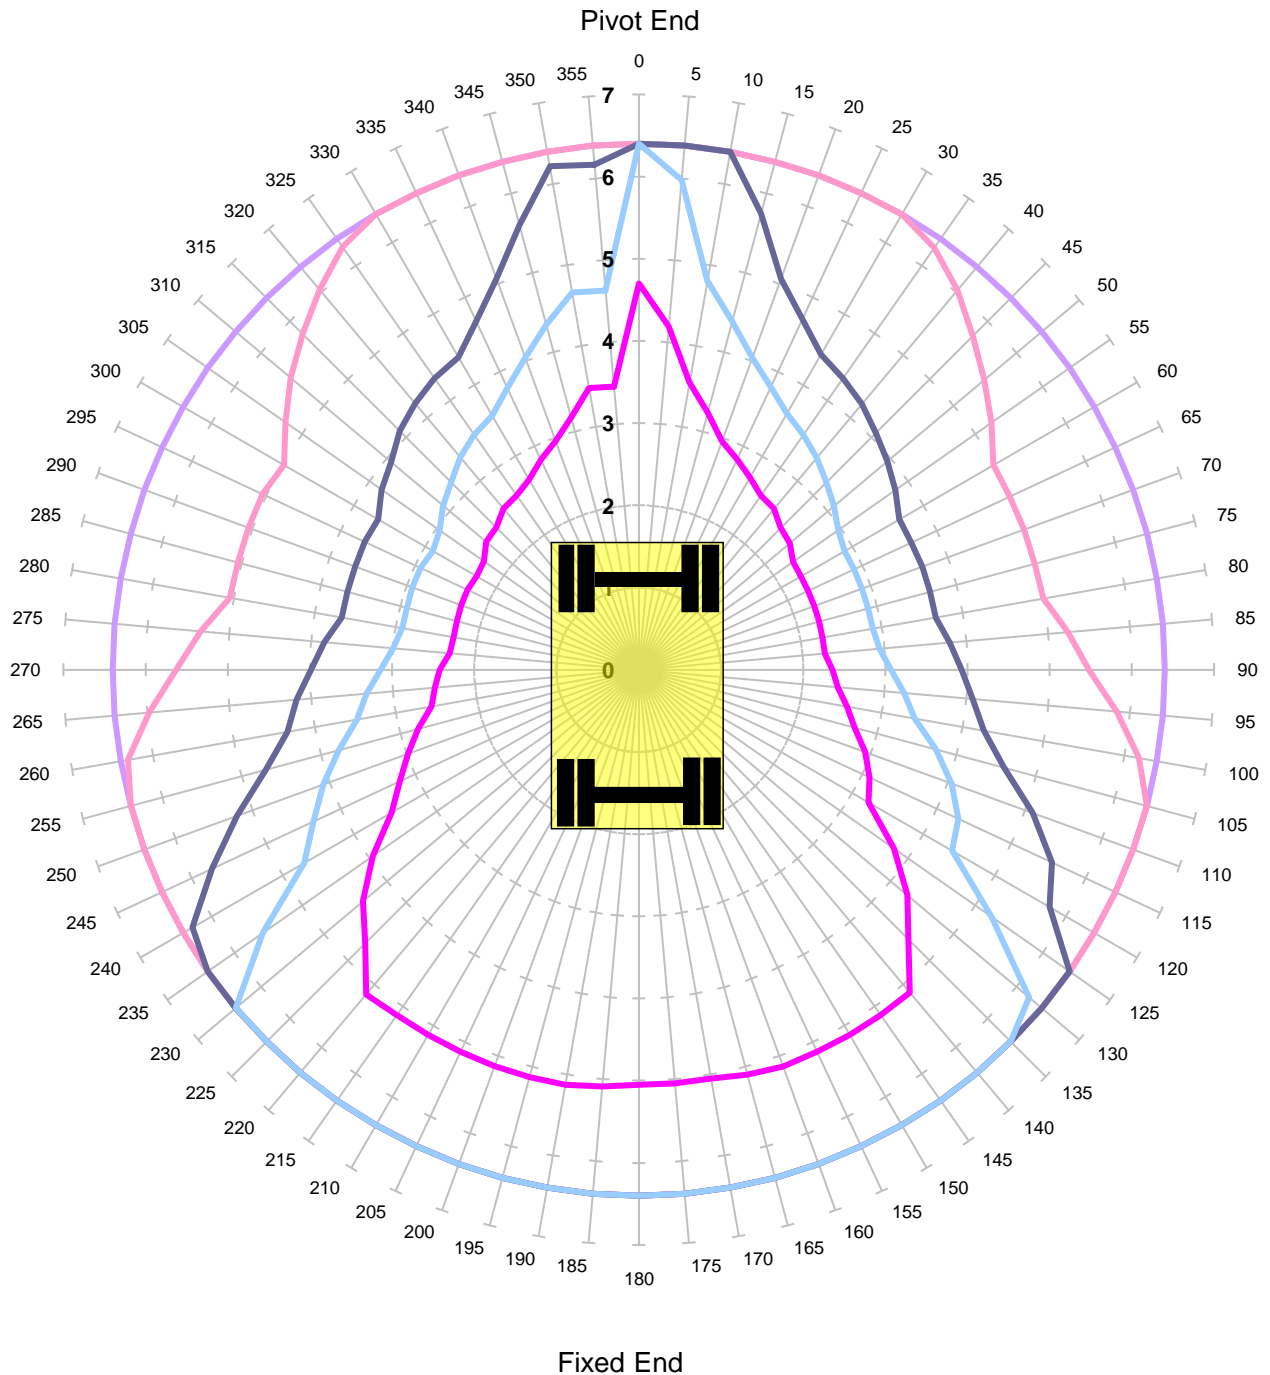


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	71.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift ALP1
Locked Road

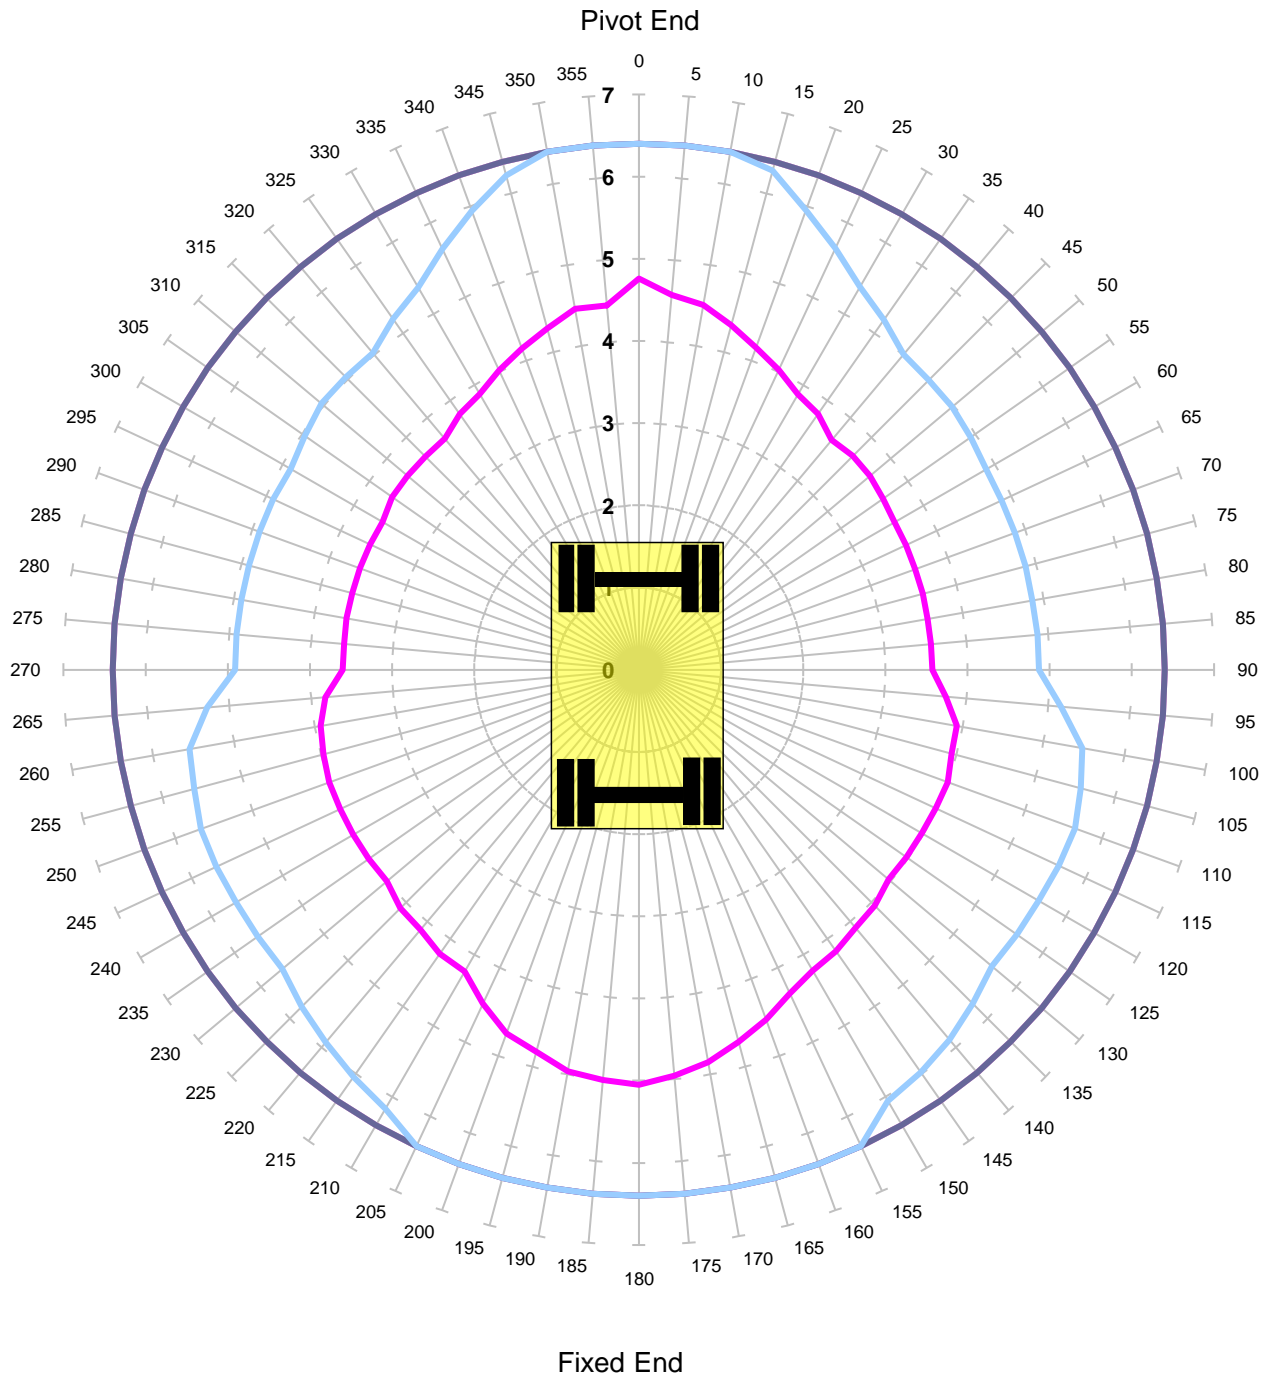

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	71.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant -150mm - Tandem Lift

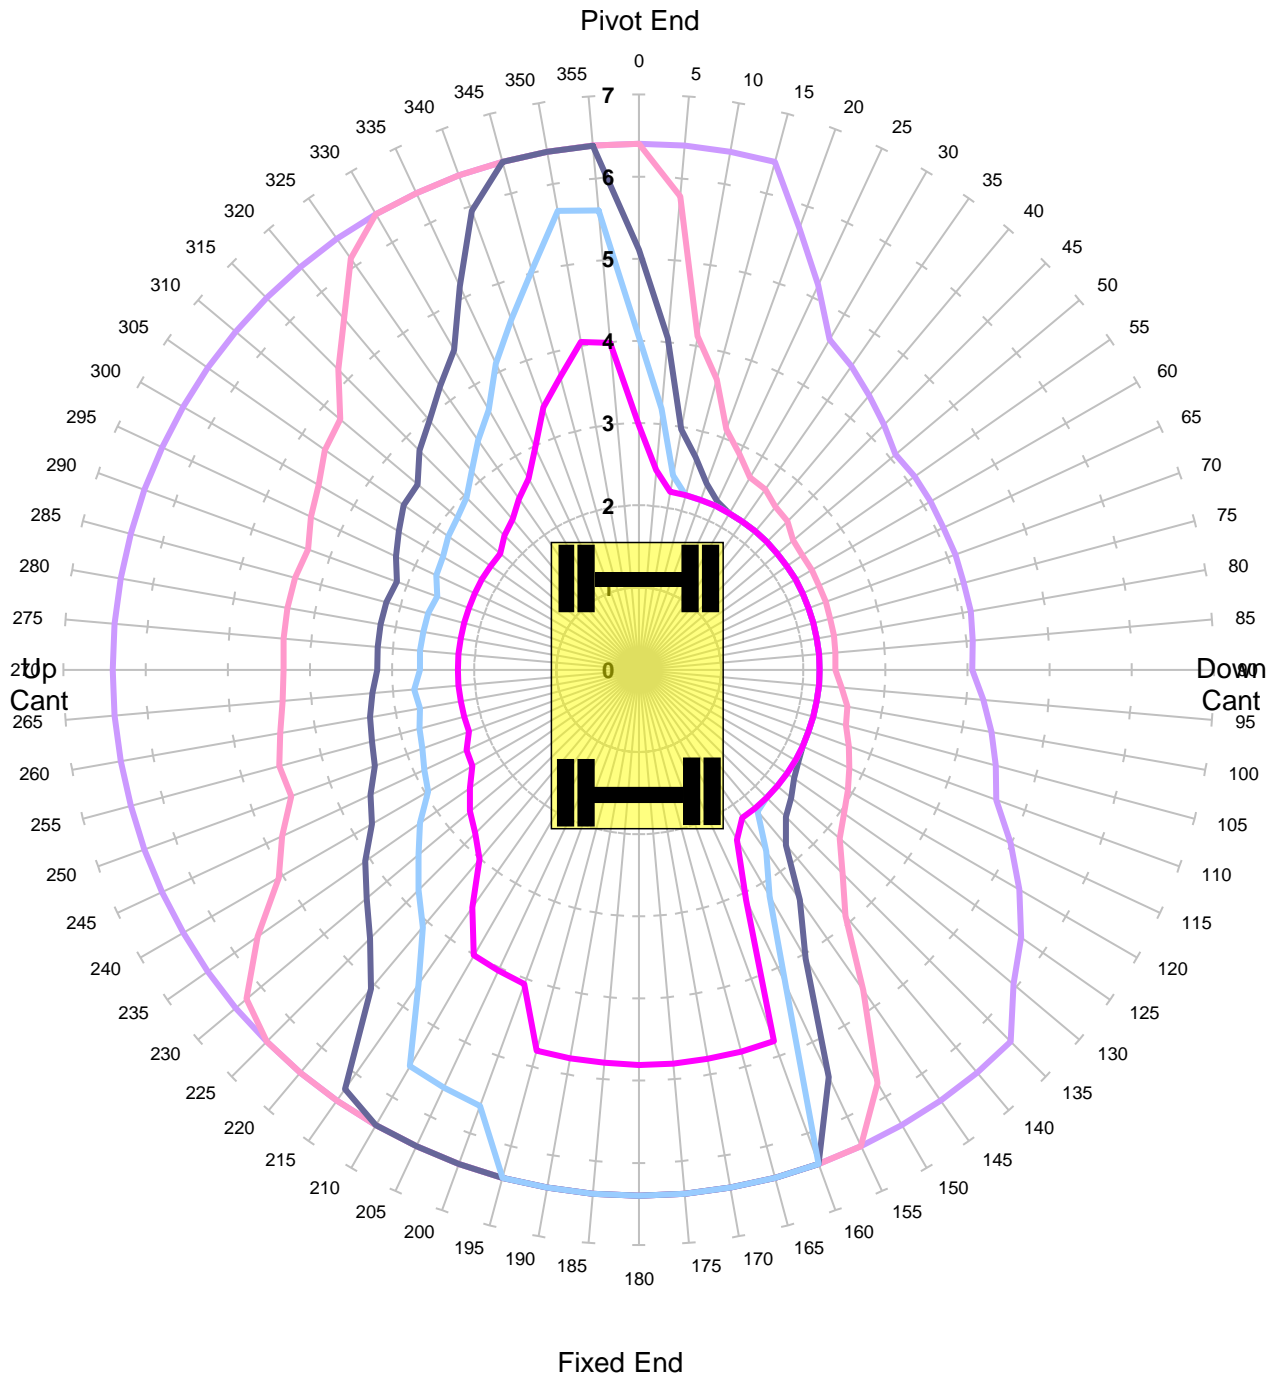

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant -50mm - Tandem Lift

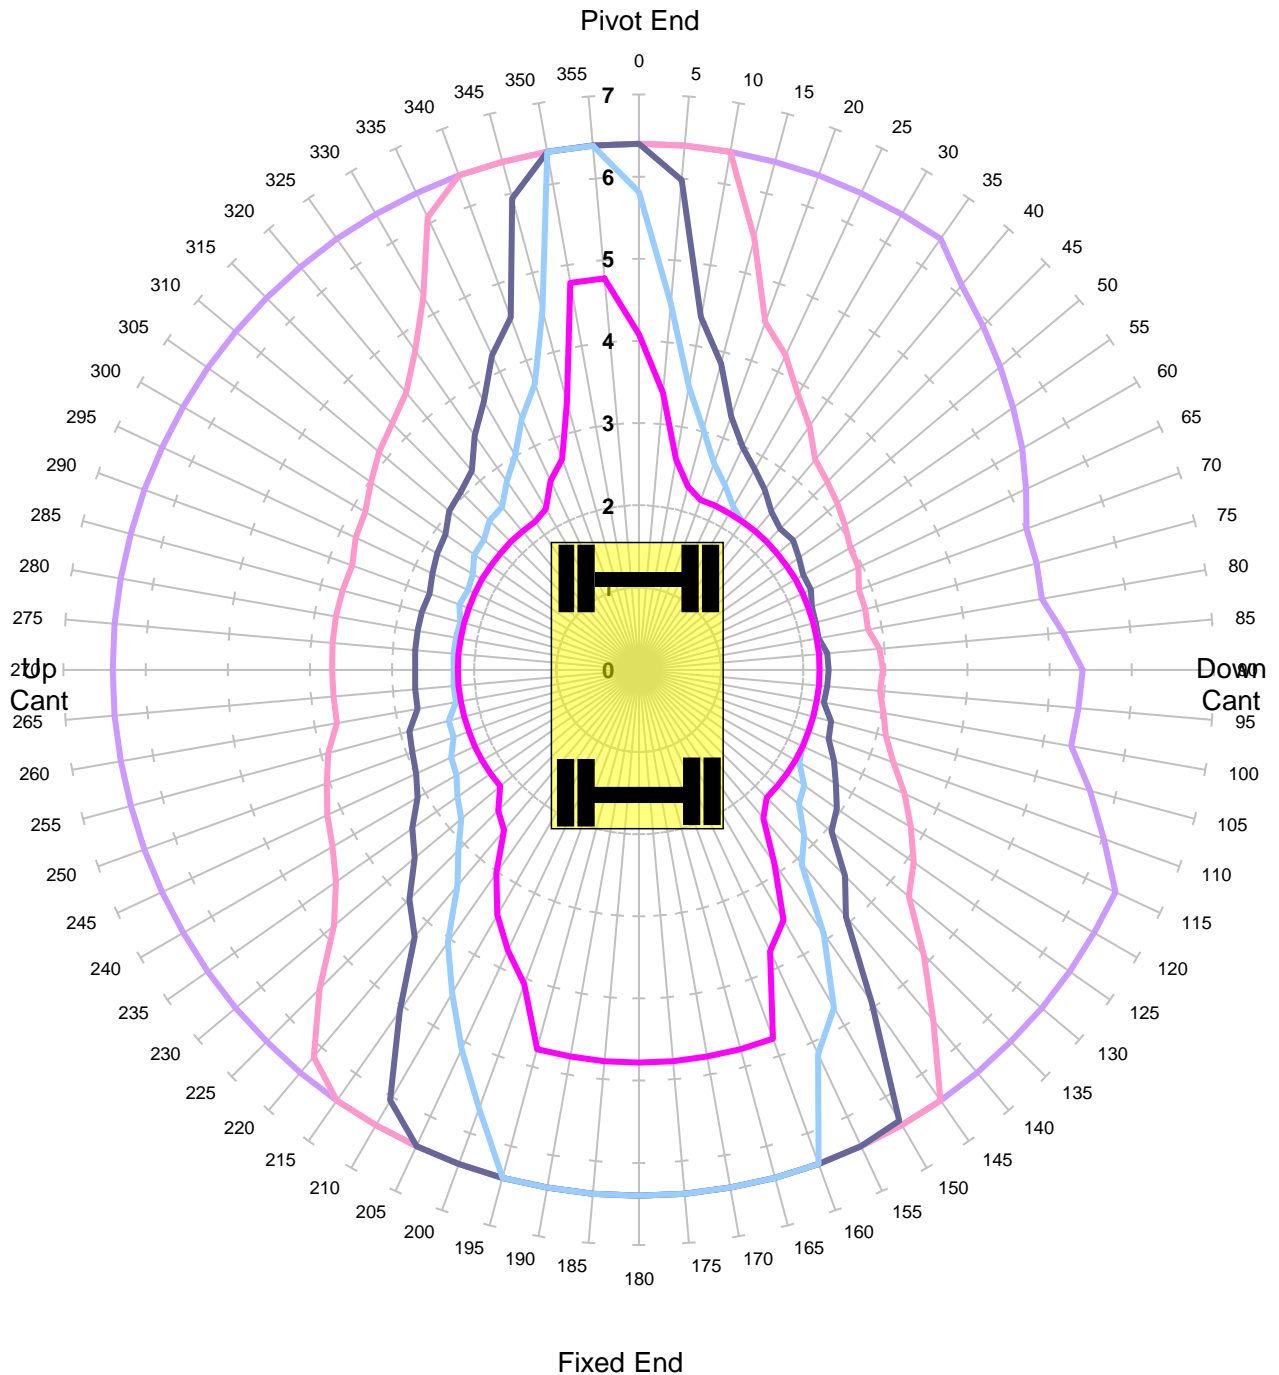


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant 50mm - Tandem Lift**

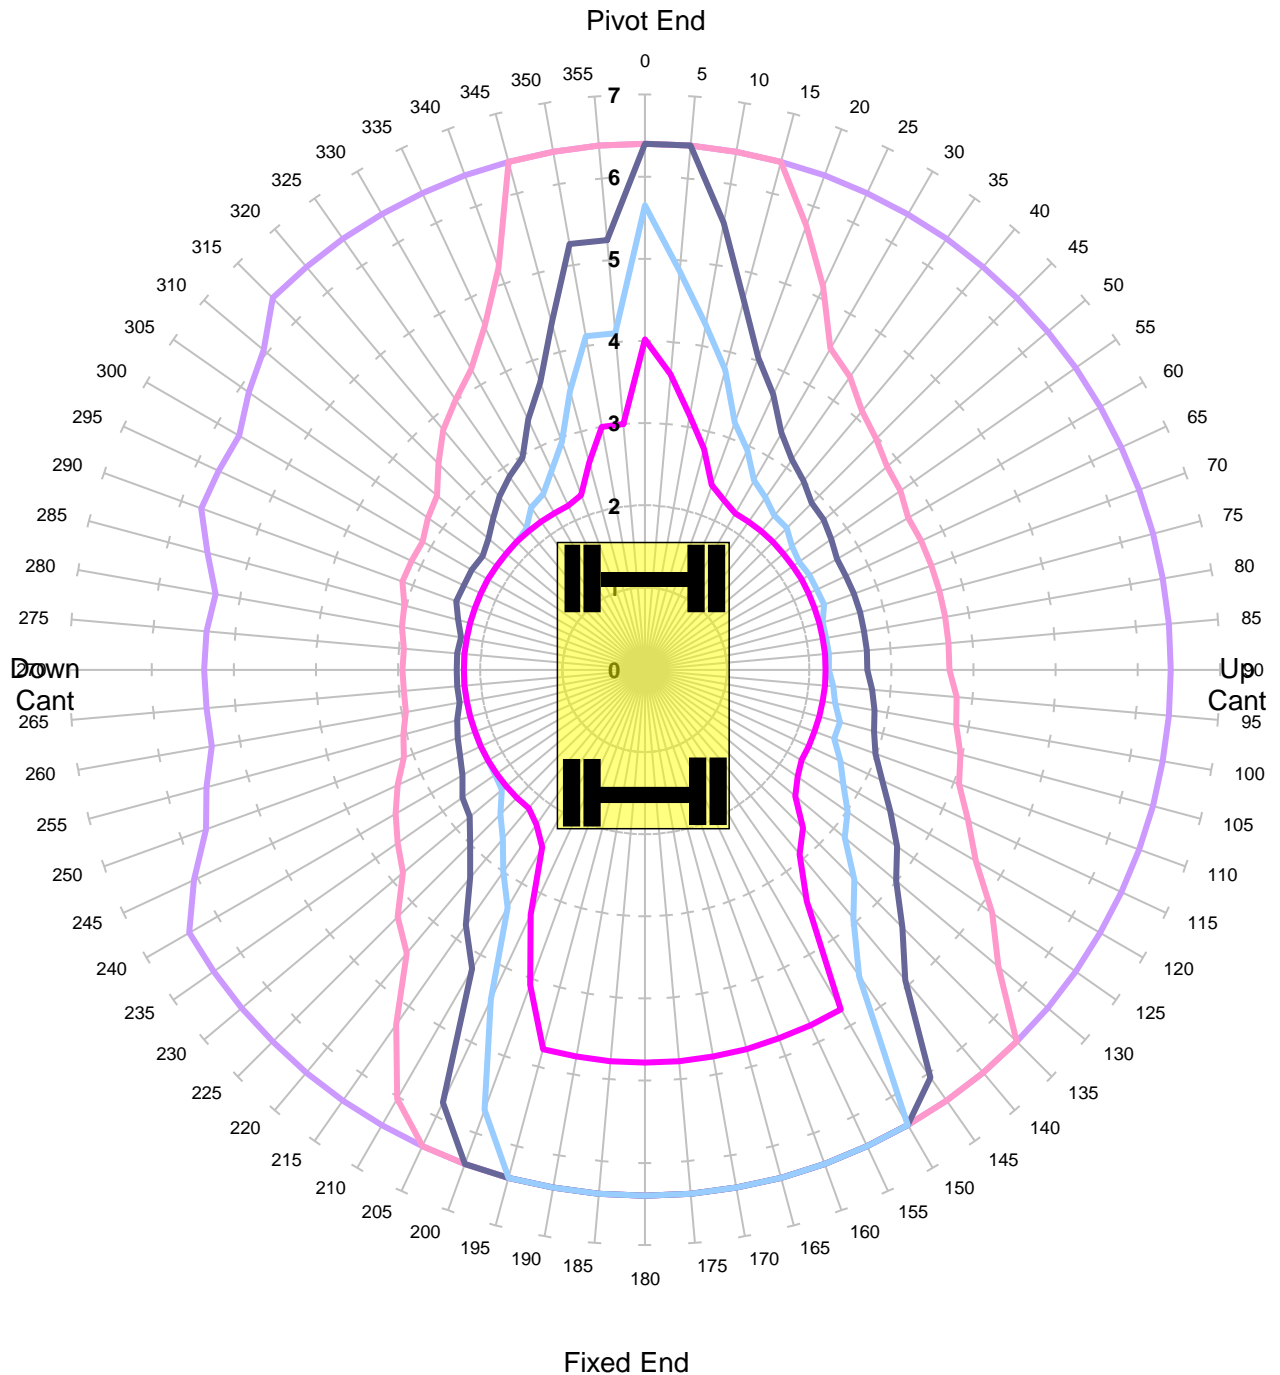

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant 150mm - Tandem Lift

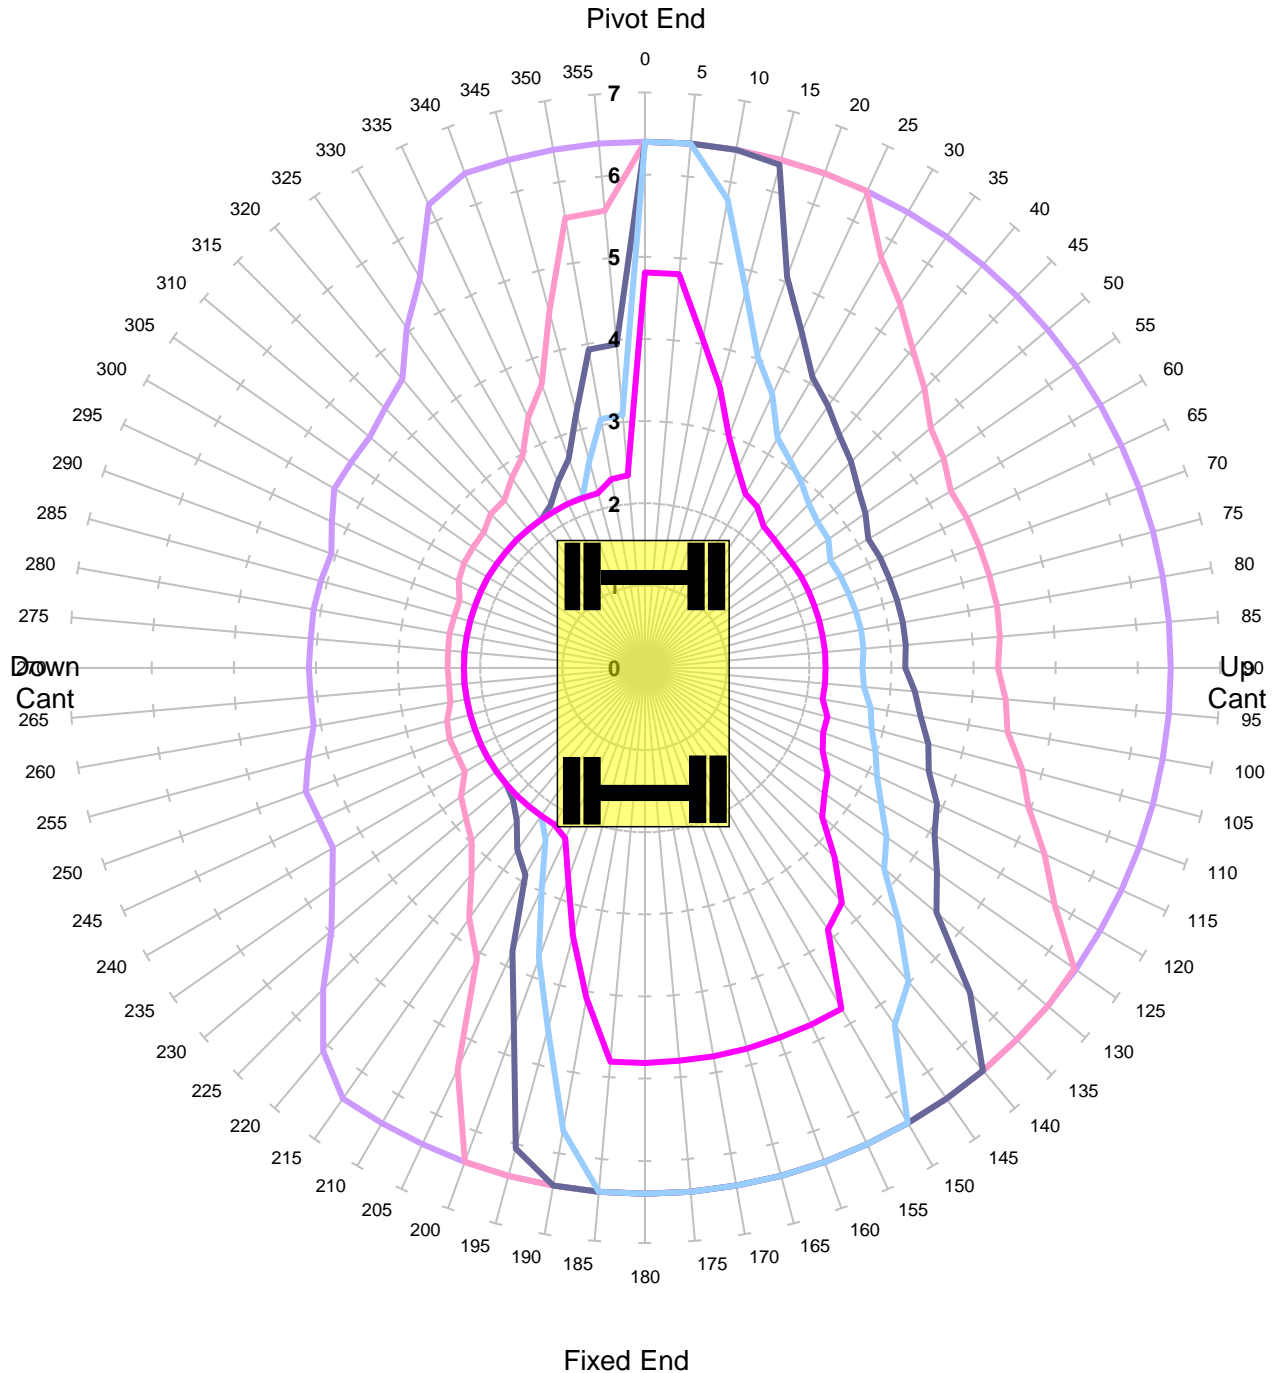


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant -150mm - Tandem Lift**

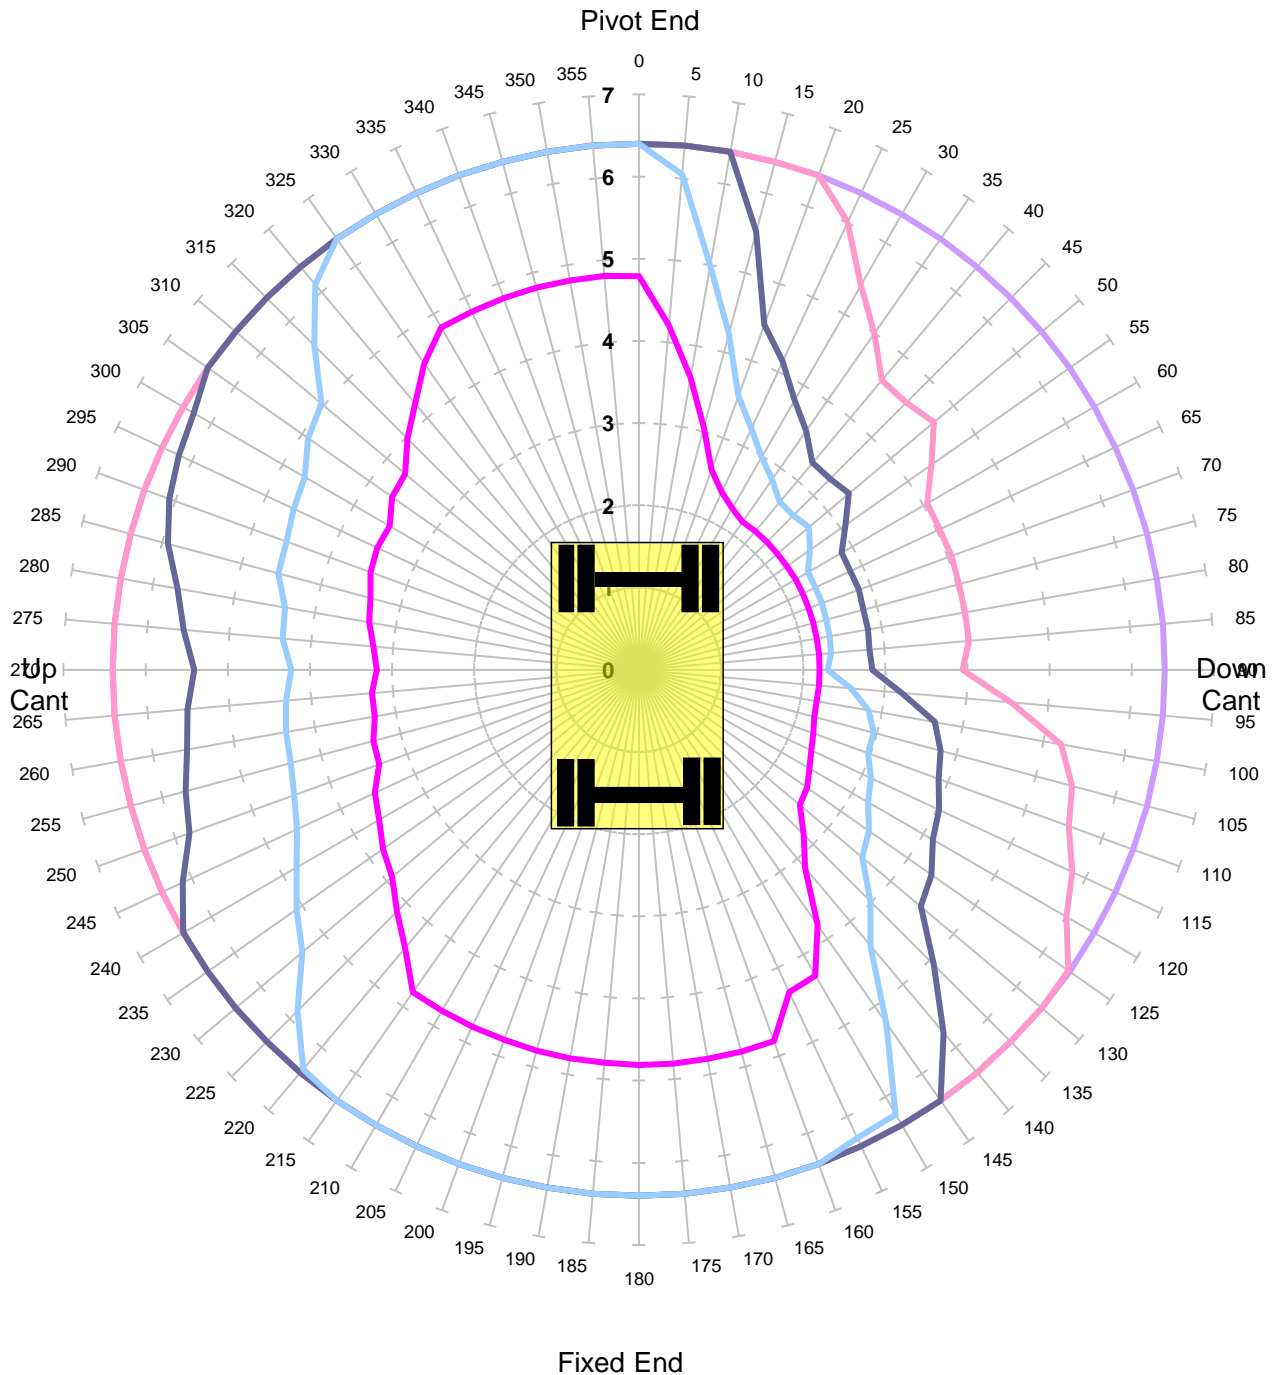


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924


**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant -50mm - Tandem Lift**

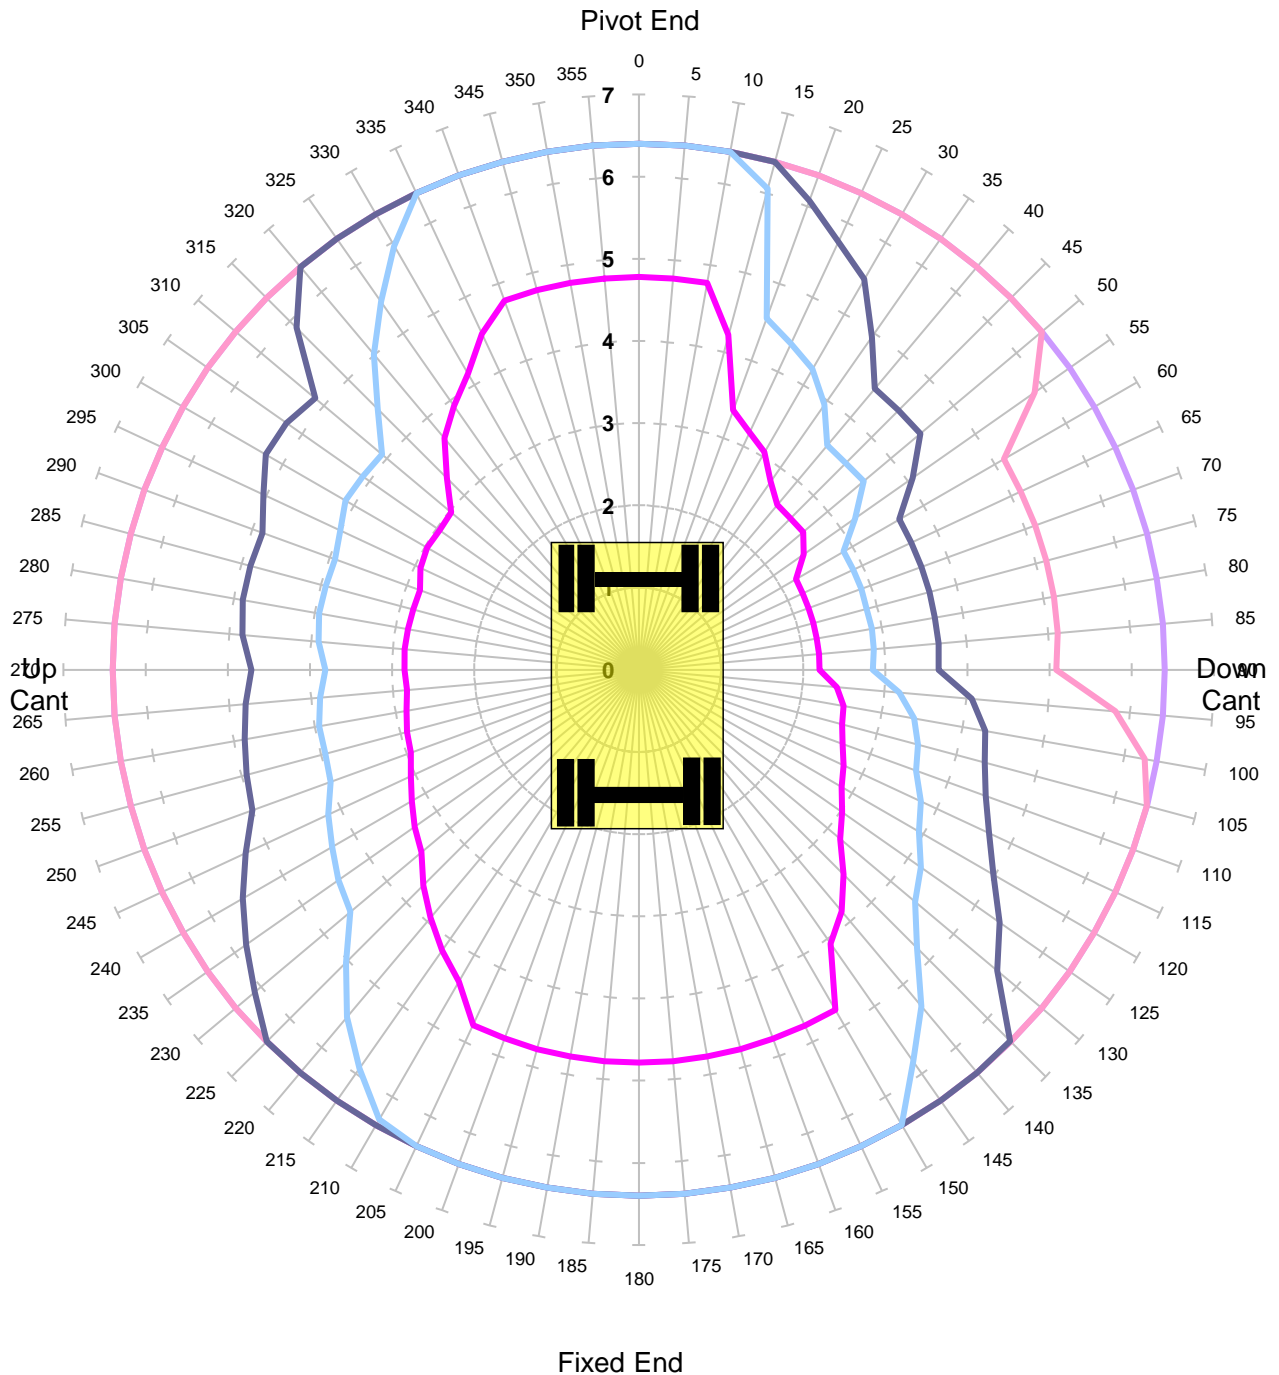

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant 50mm - Tandem Lift**

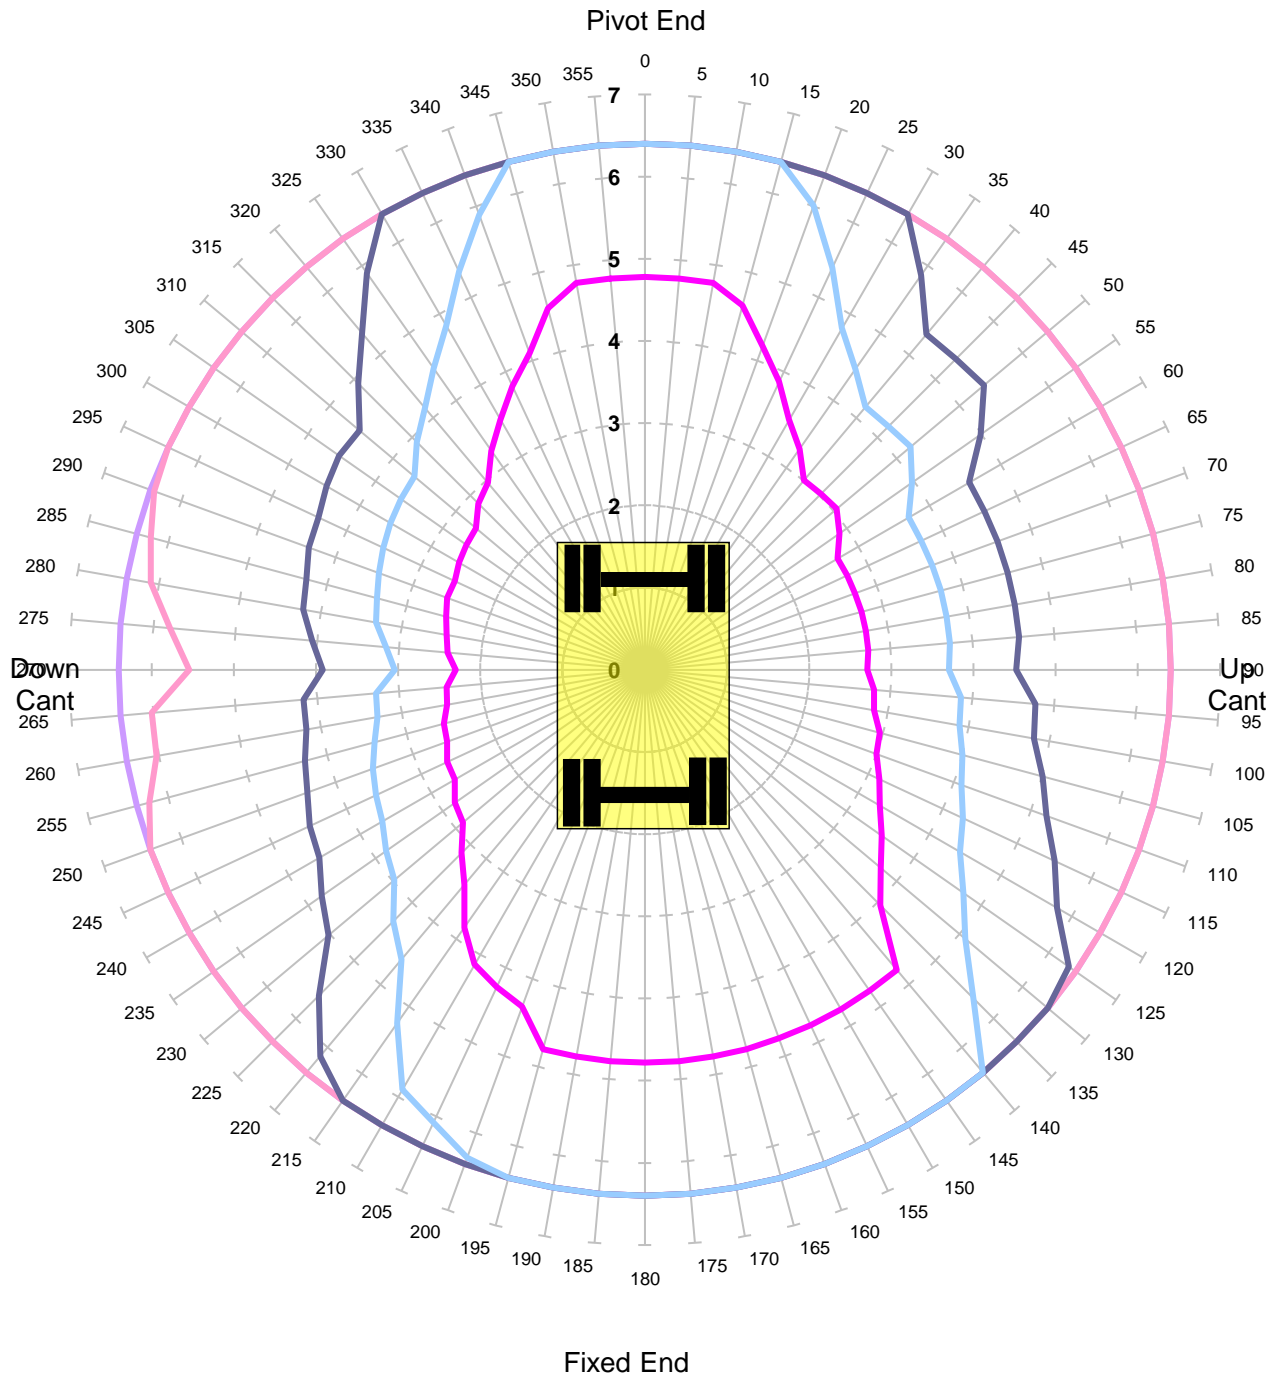


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant 150mm - Tandem Lift**

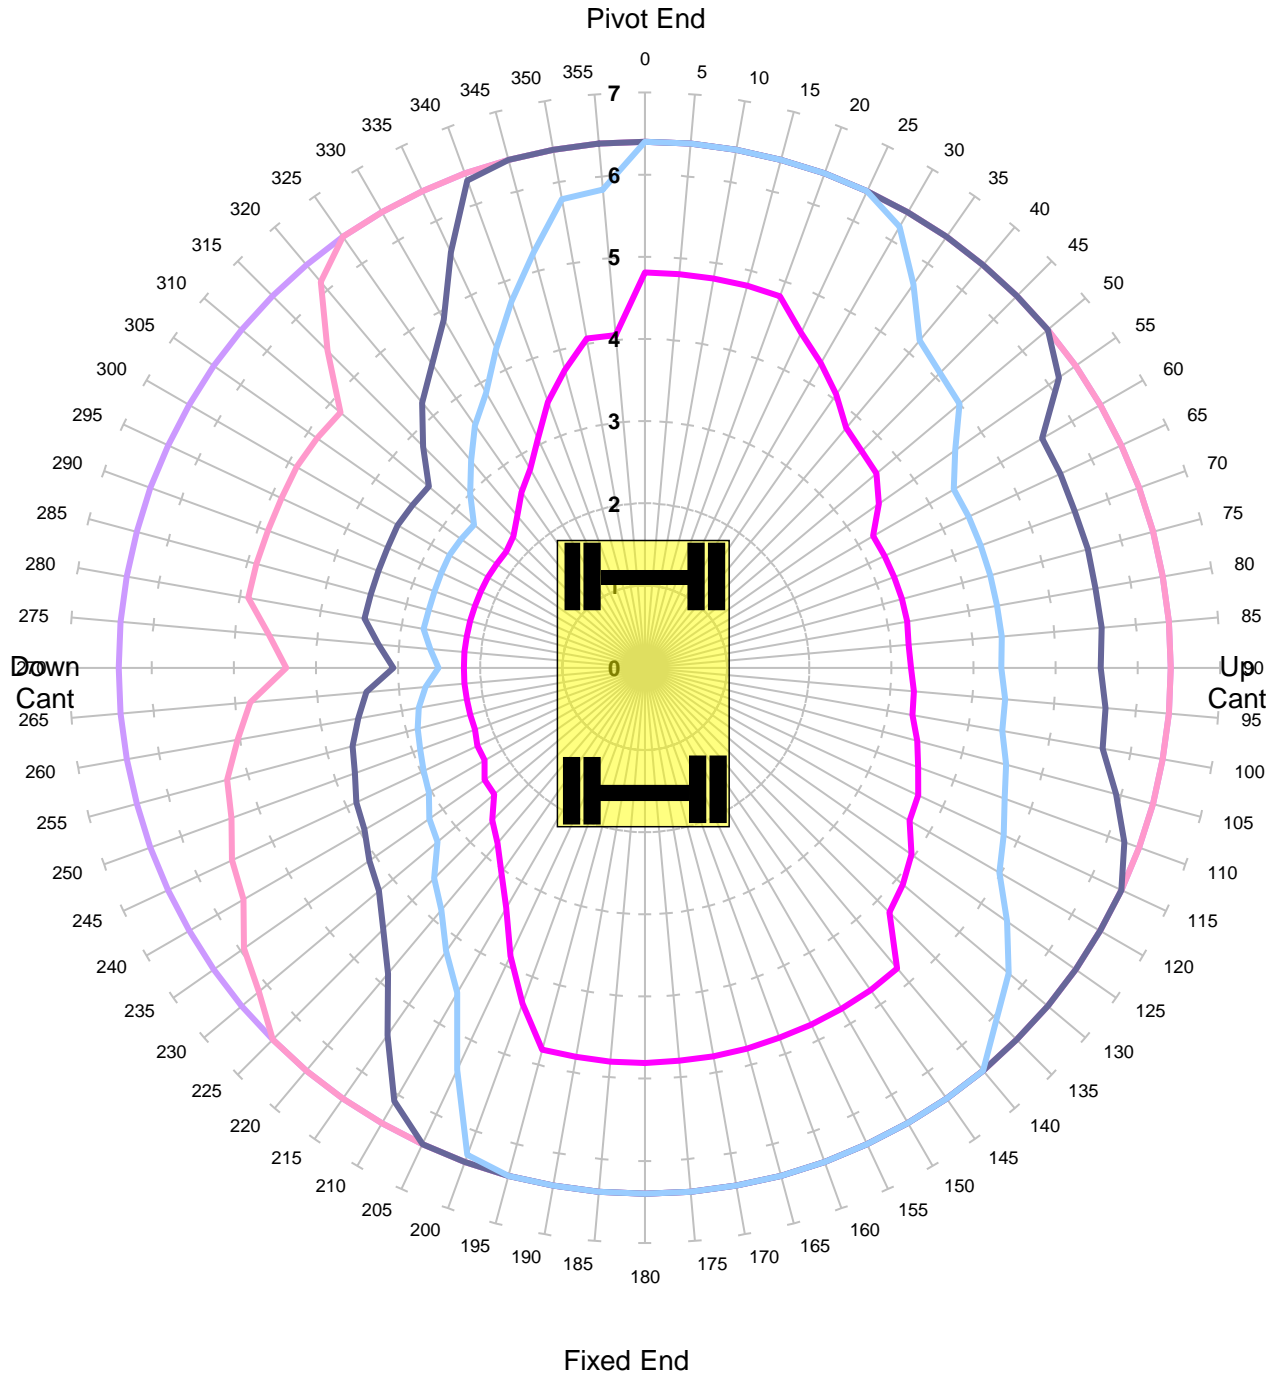

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift ALP1**

Unlocked Road - Tandem Lift

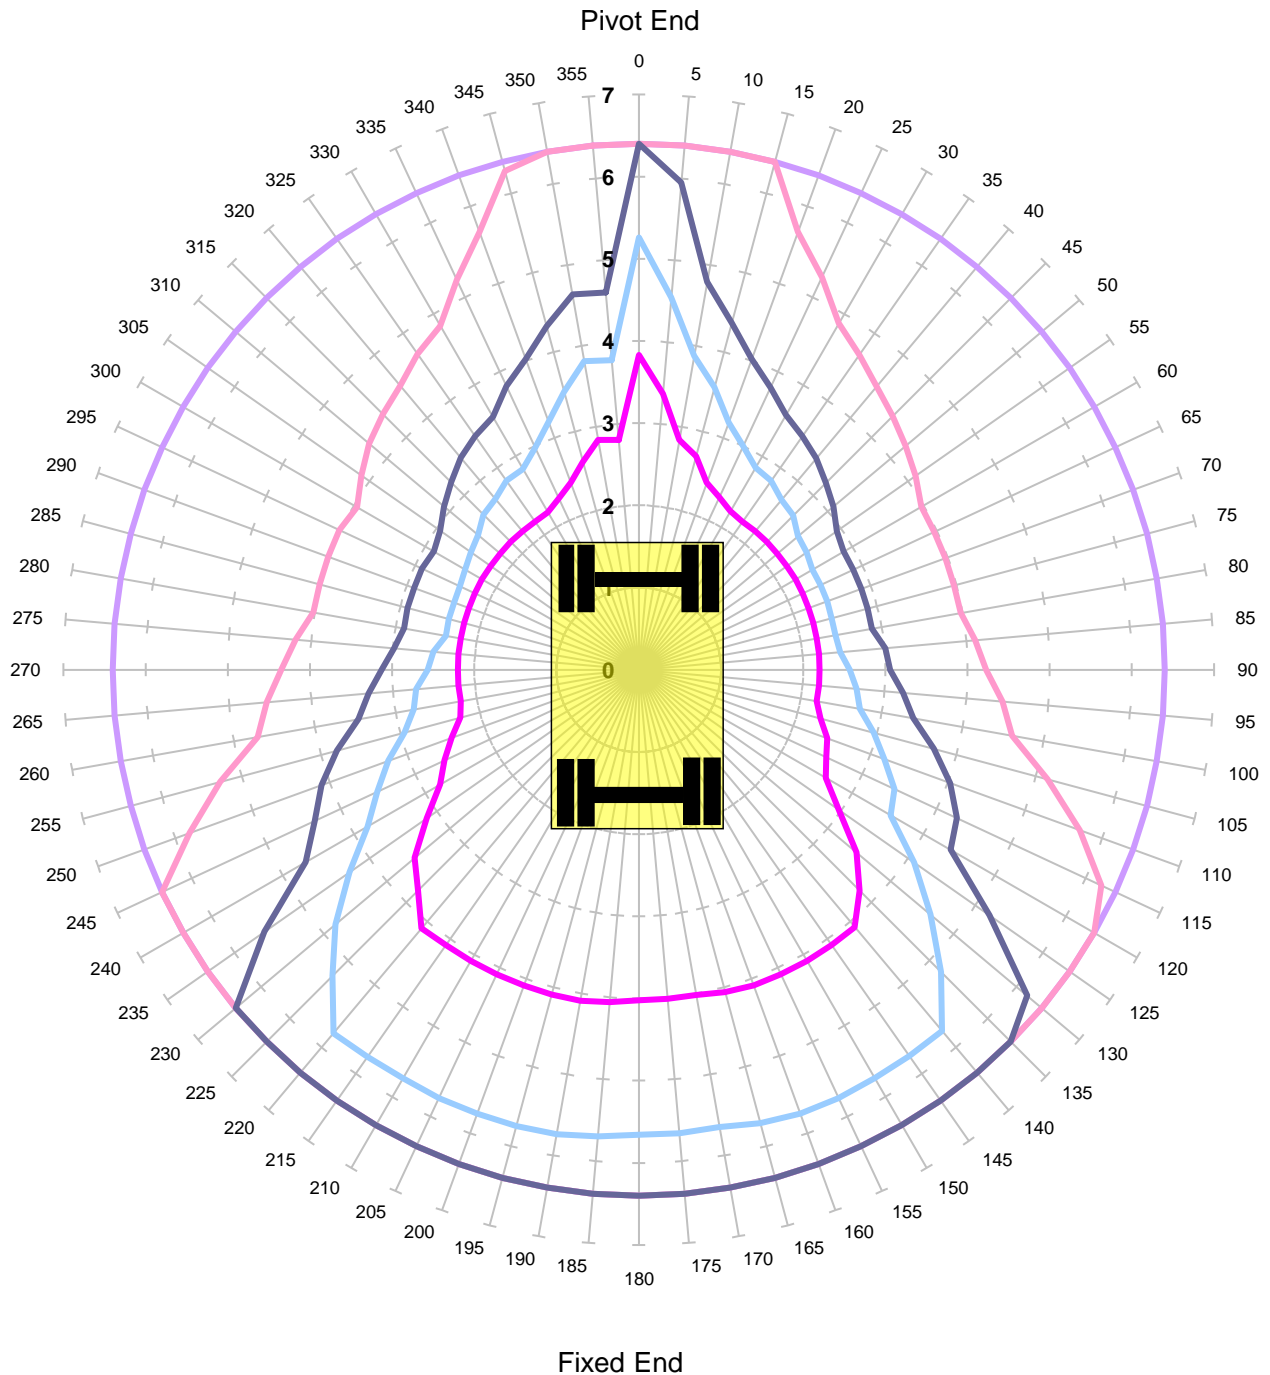


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	47.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift ALP1
Locked Road - Tandem Lift

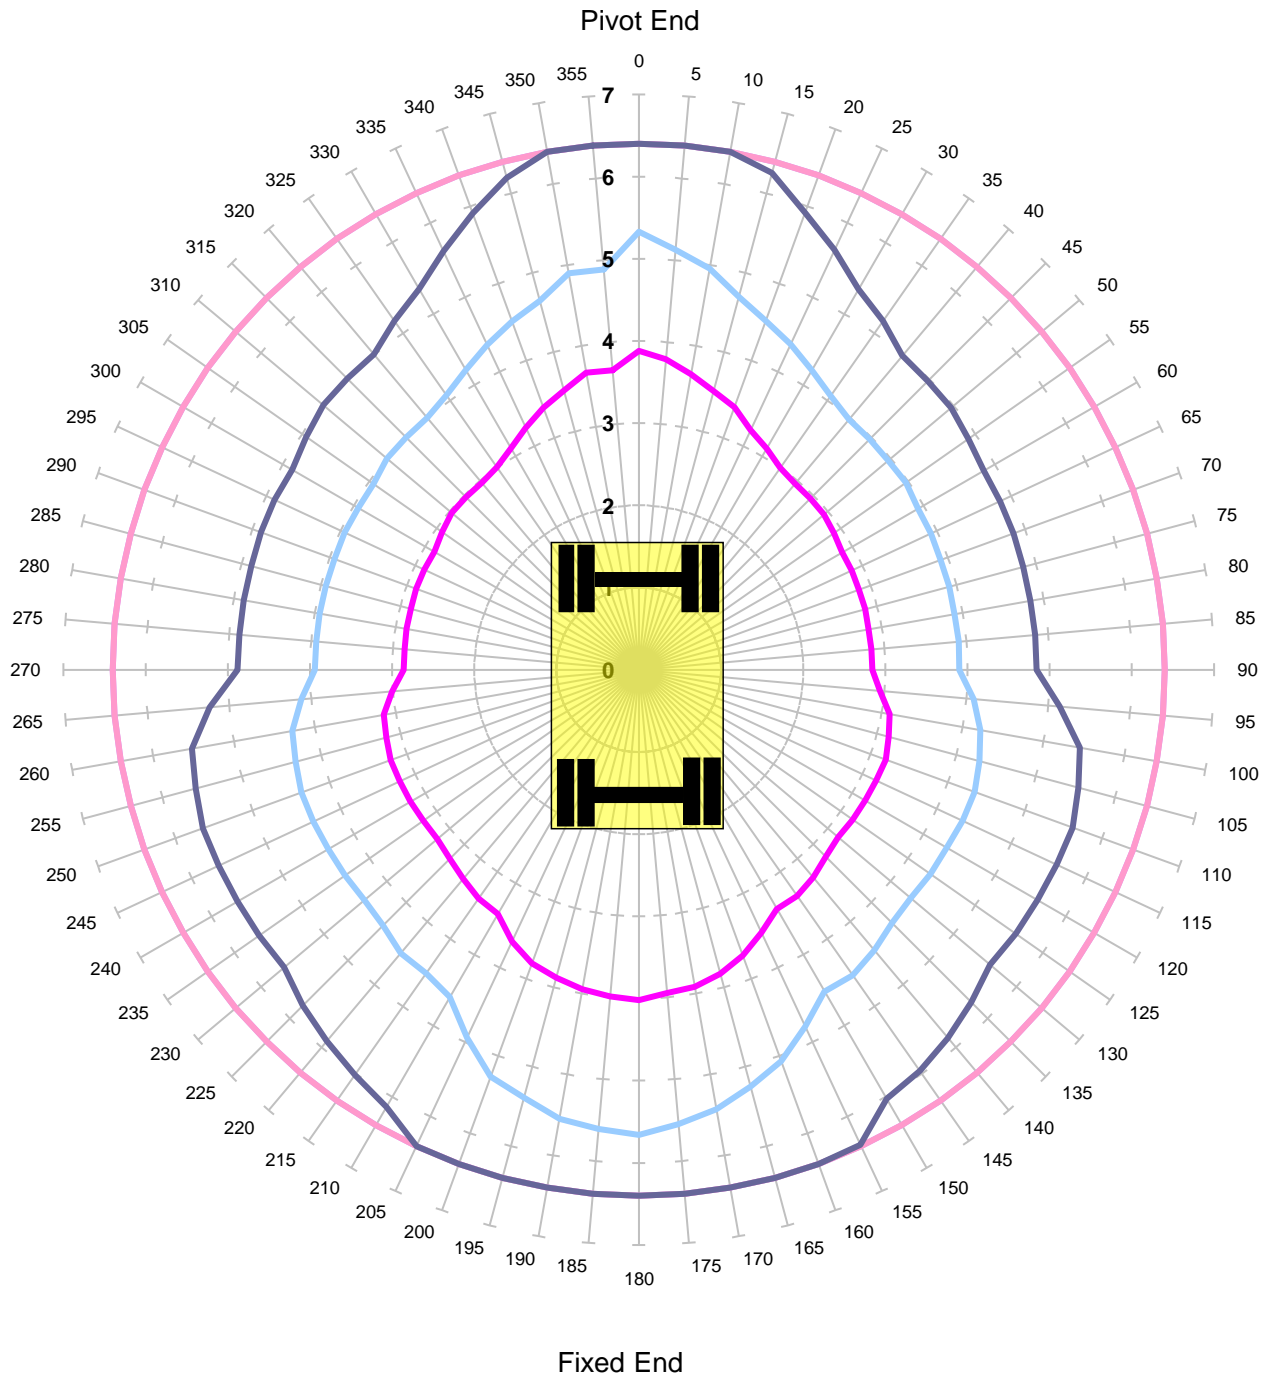

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	47.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Unlocked Rail Cant -150mm

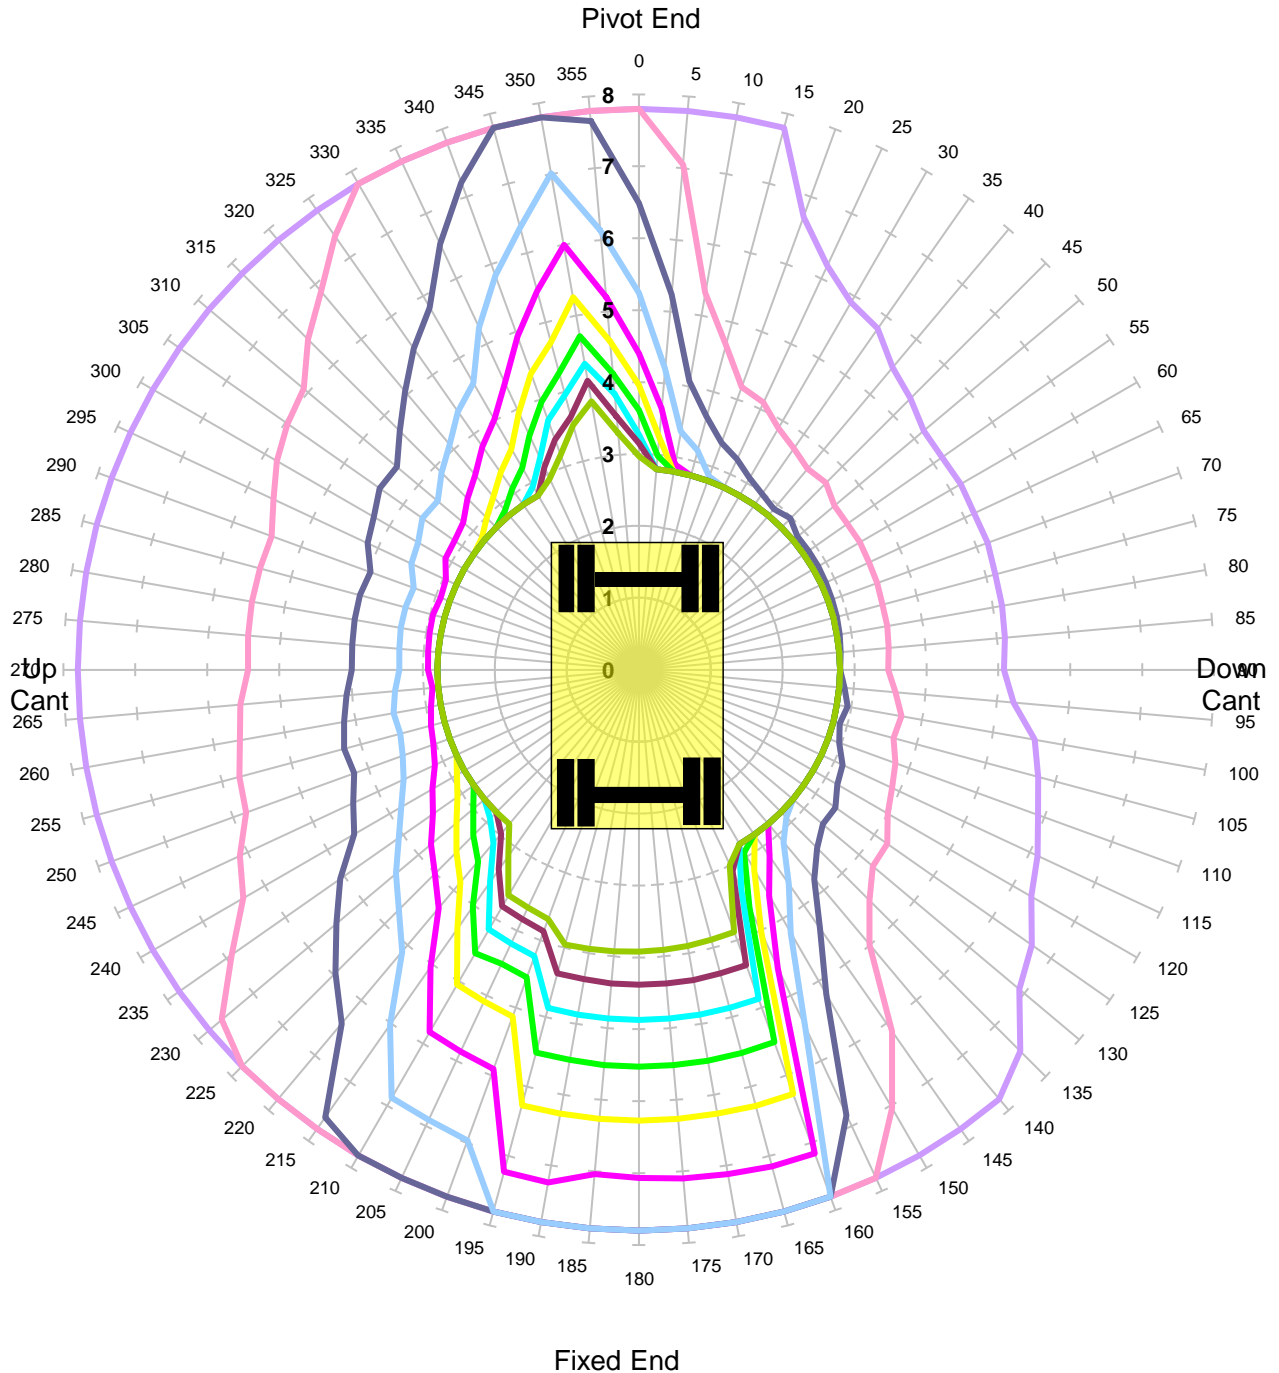


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -50mm**

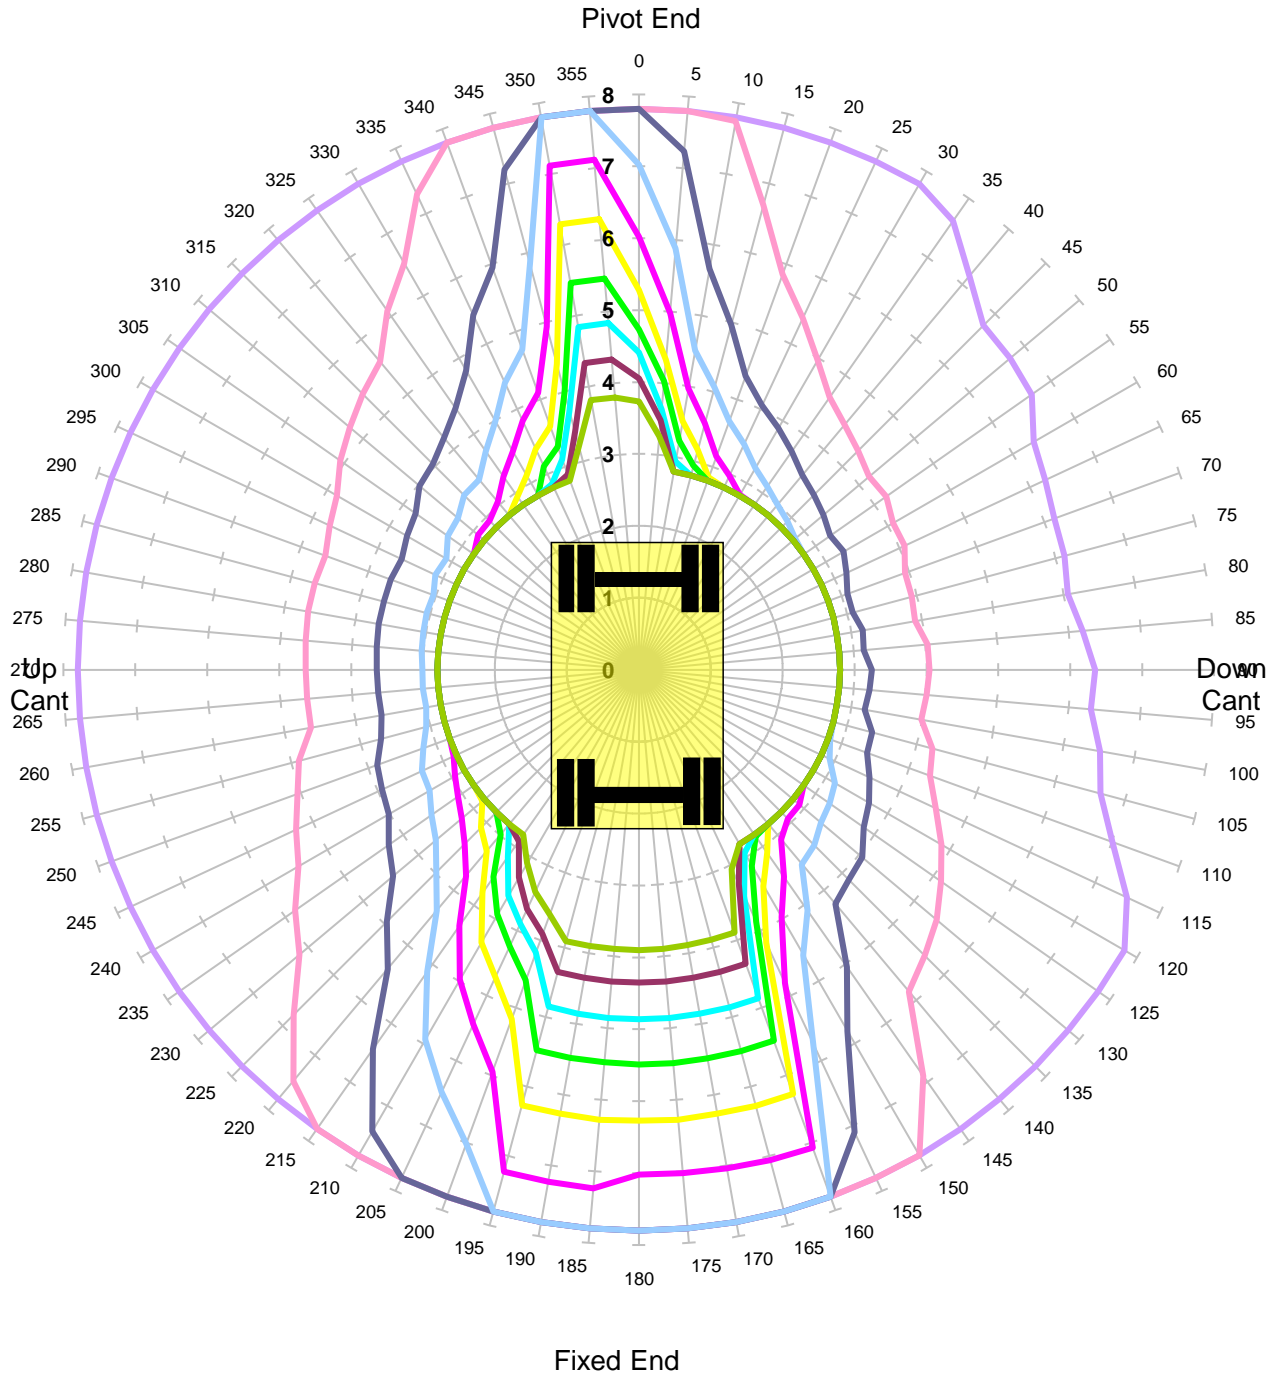


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 50mm**

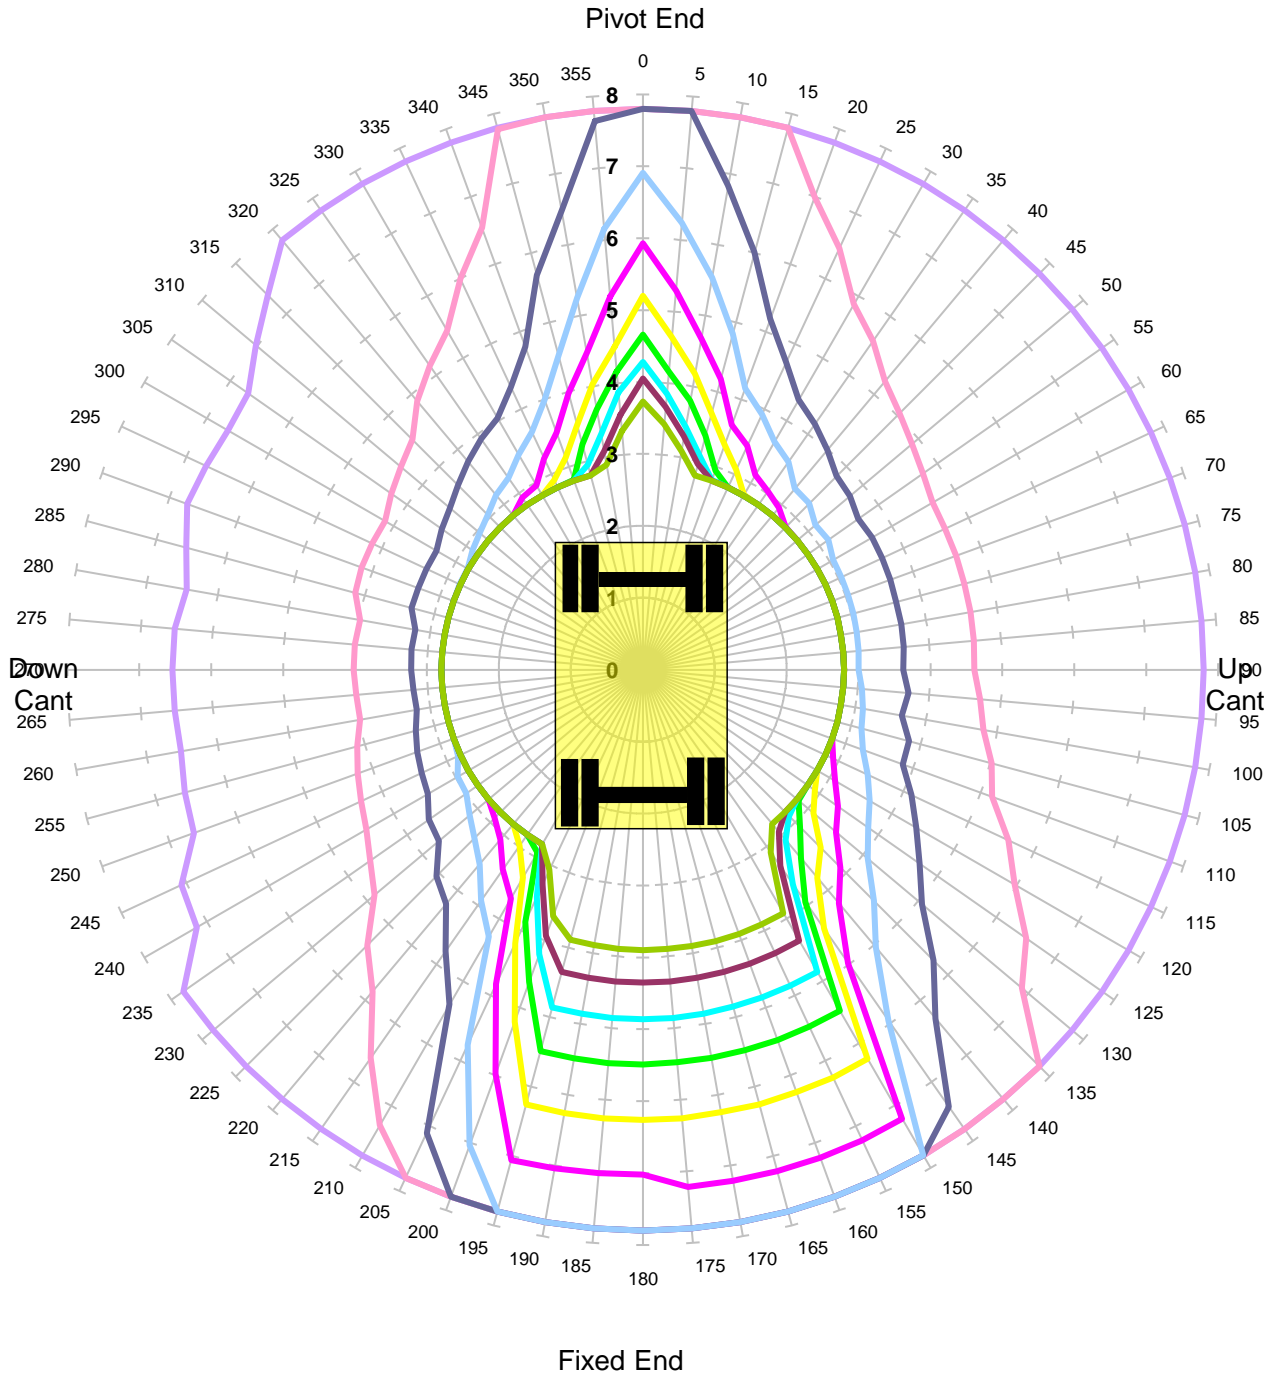


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant 150mm**

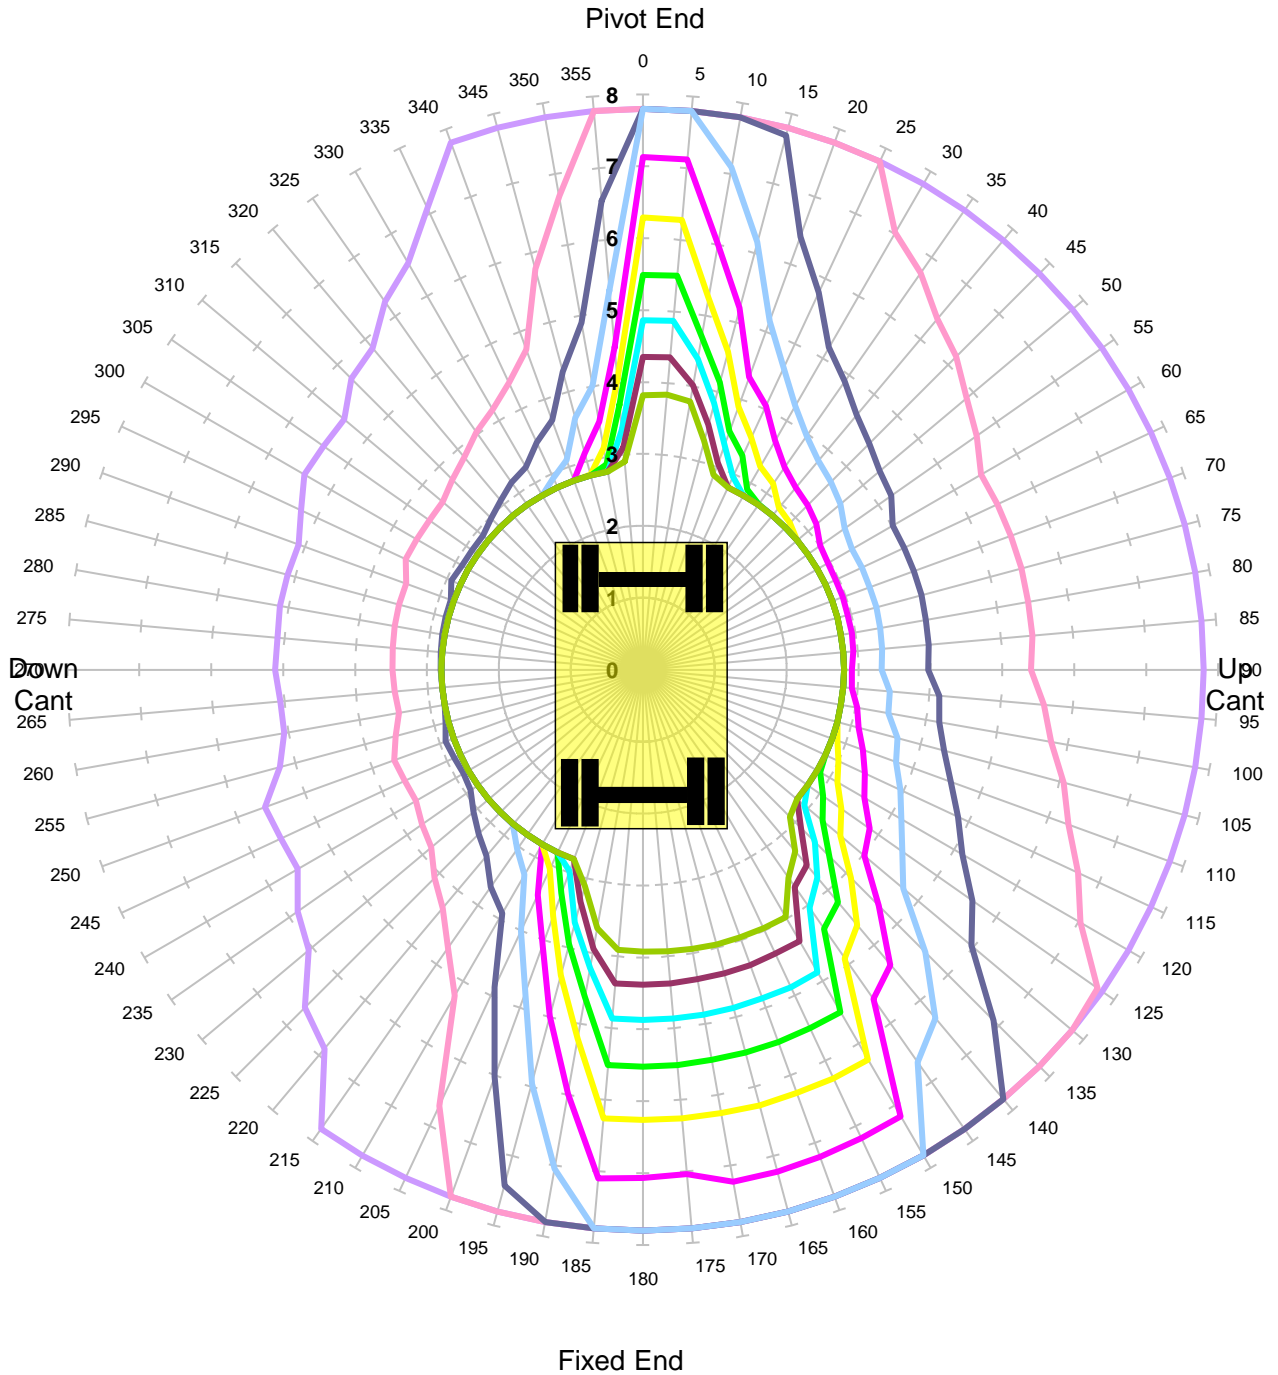


MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Locked Rail Cant -150mm

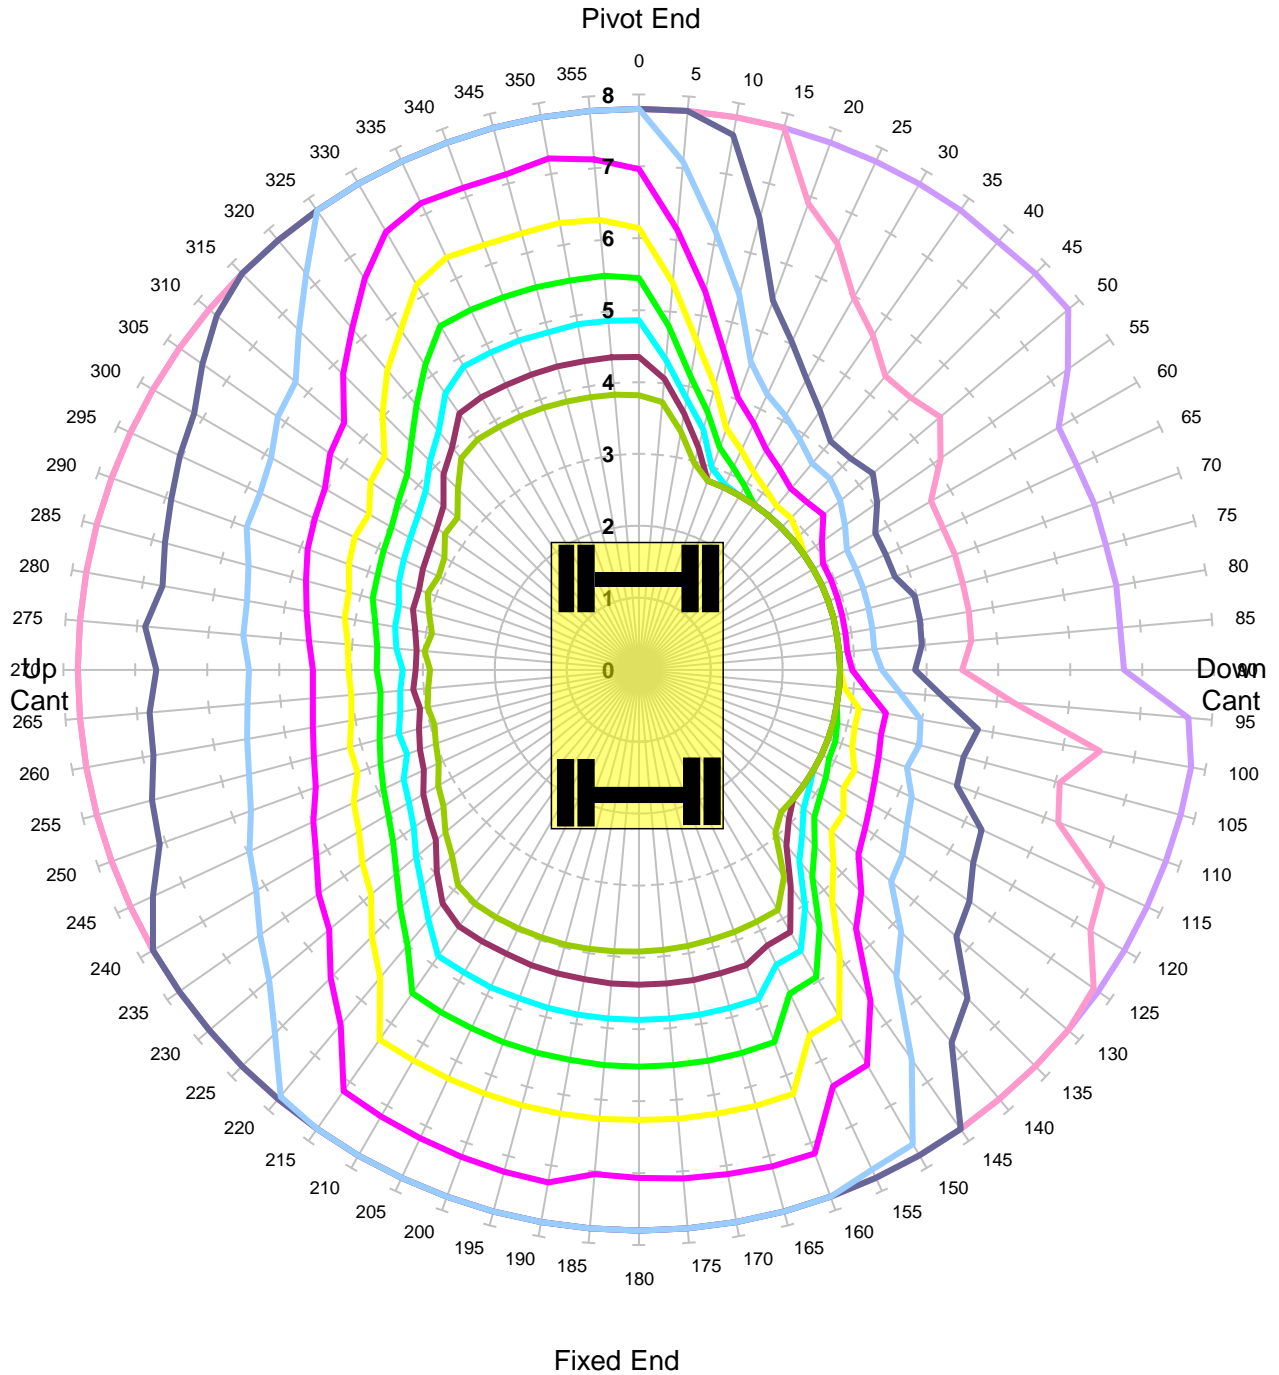


MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Locked Rail Cant -50mm

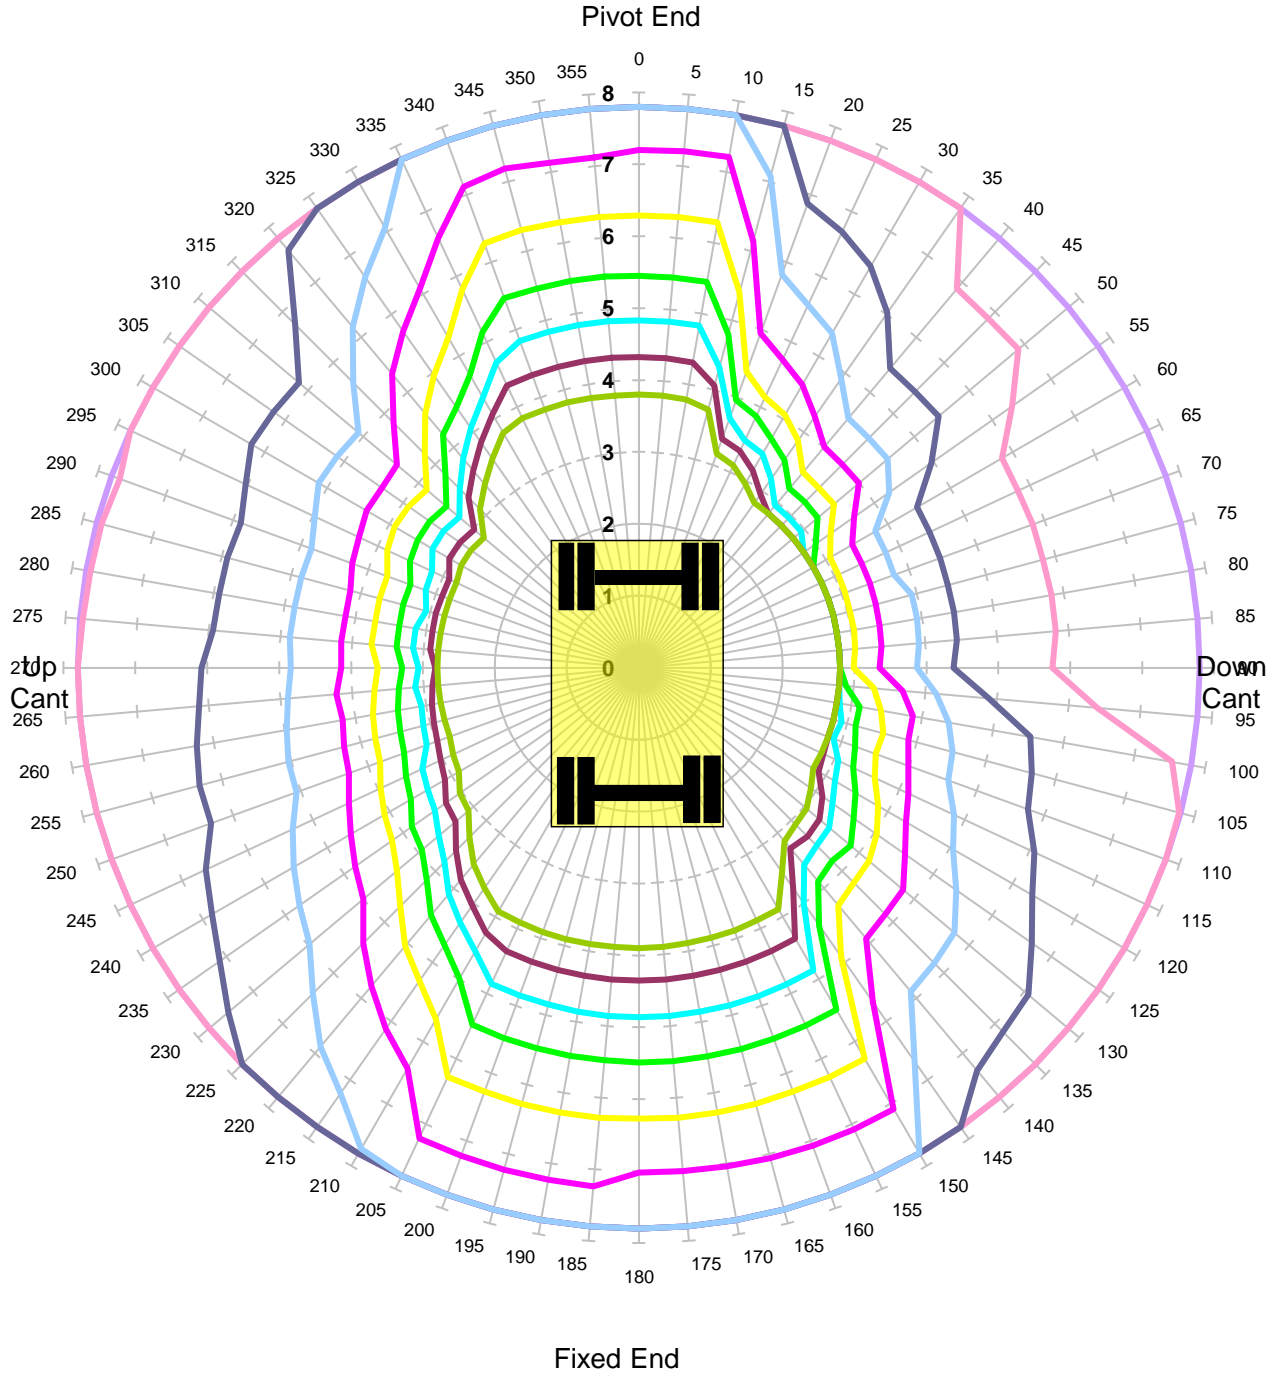


MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Locked Rail Cant 50mm

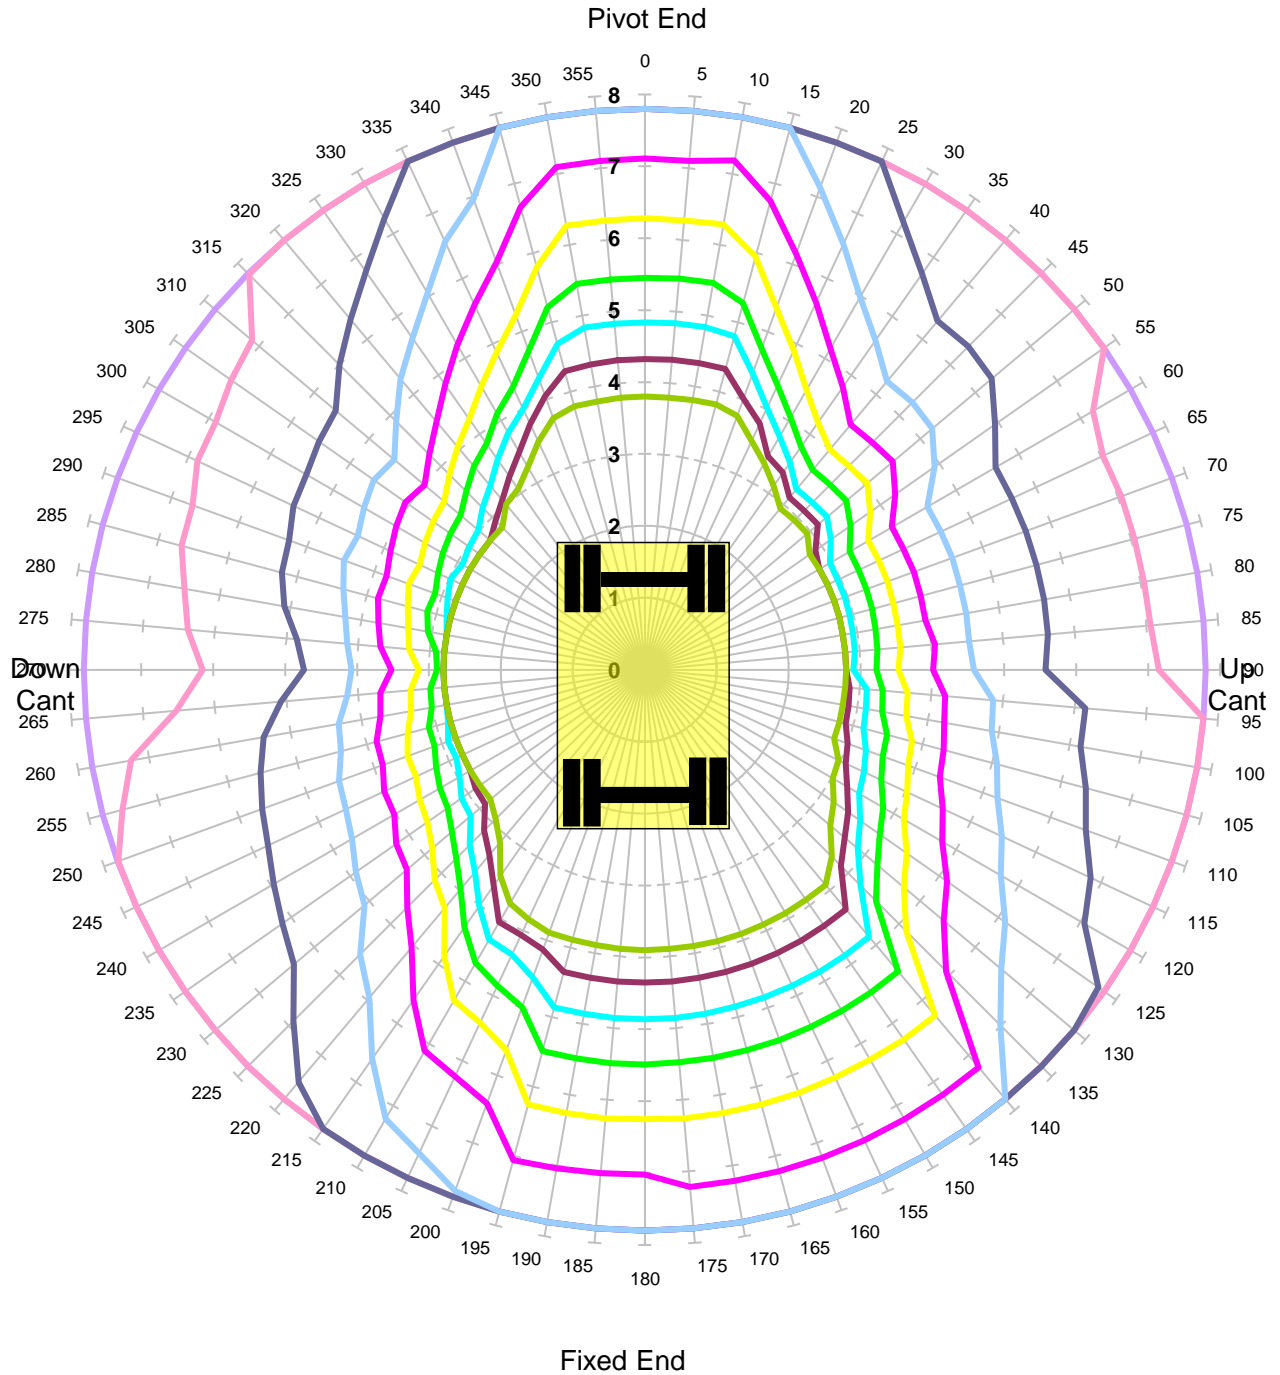


MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			


Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Locked Rail Cant 150mm

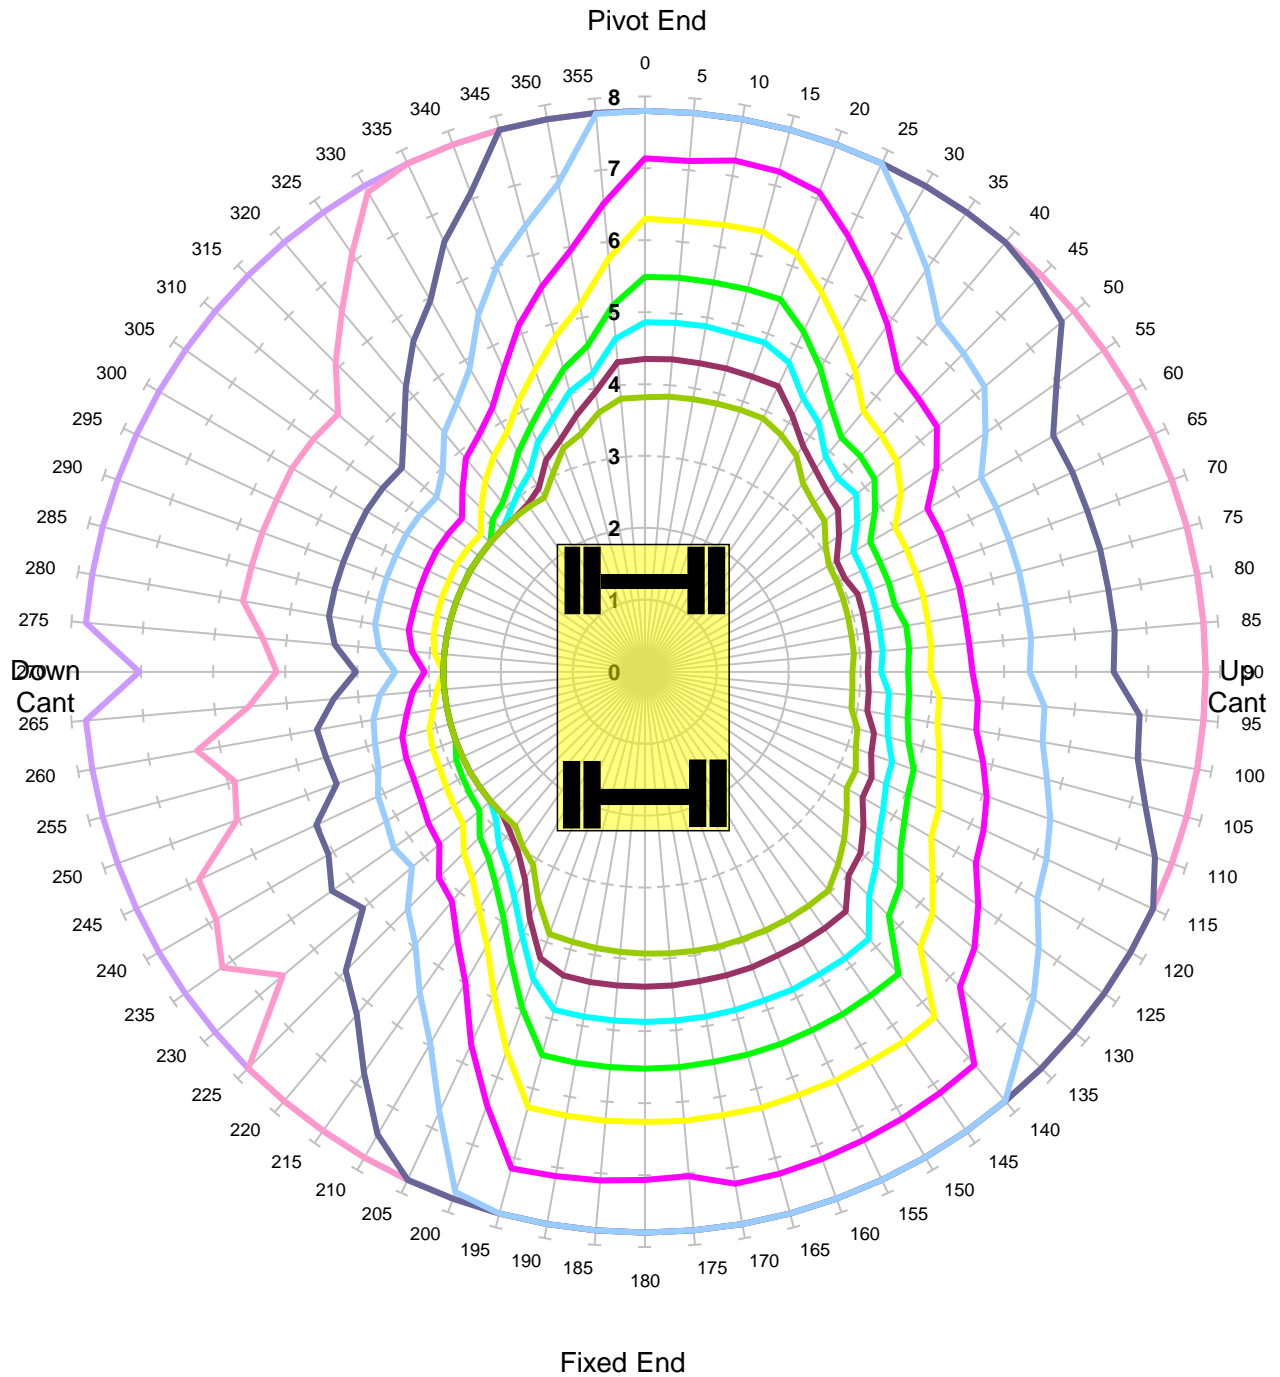

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift QH
Unlocked Road

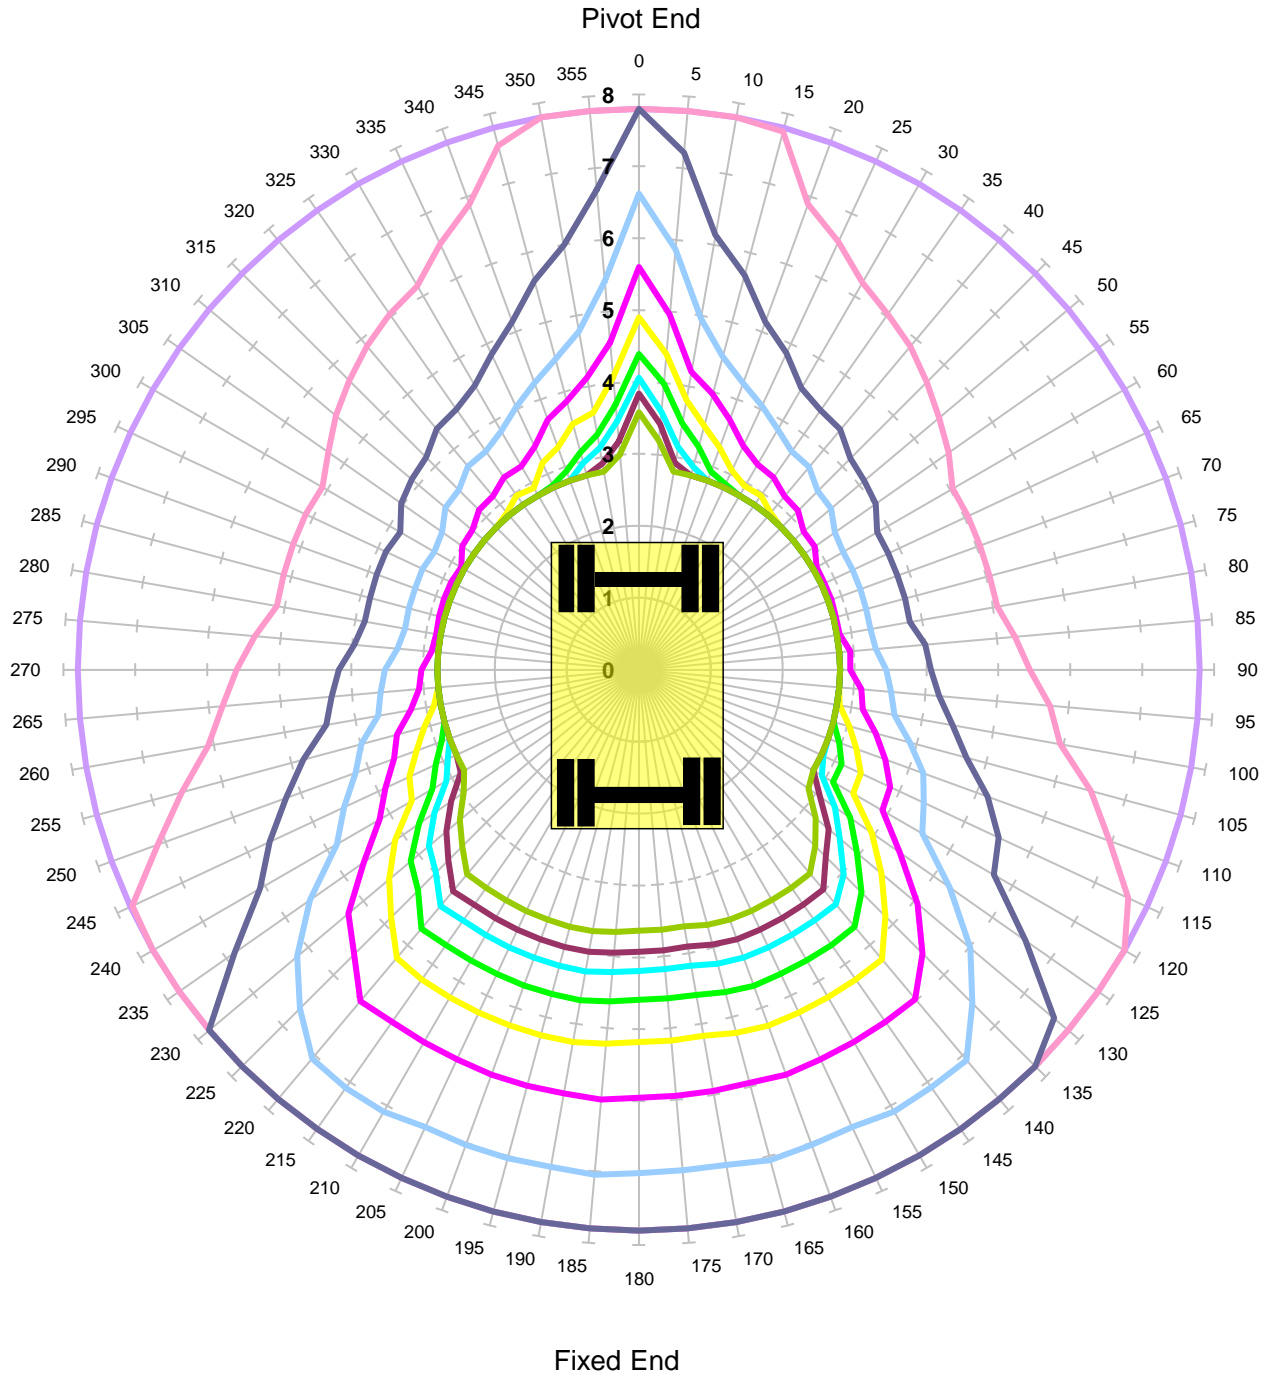


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	71.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift QH
Locked Road

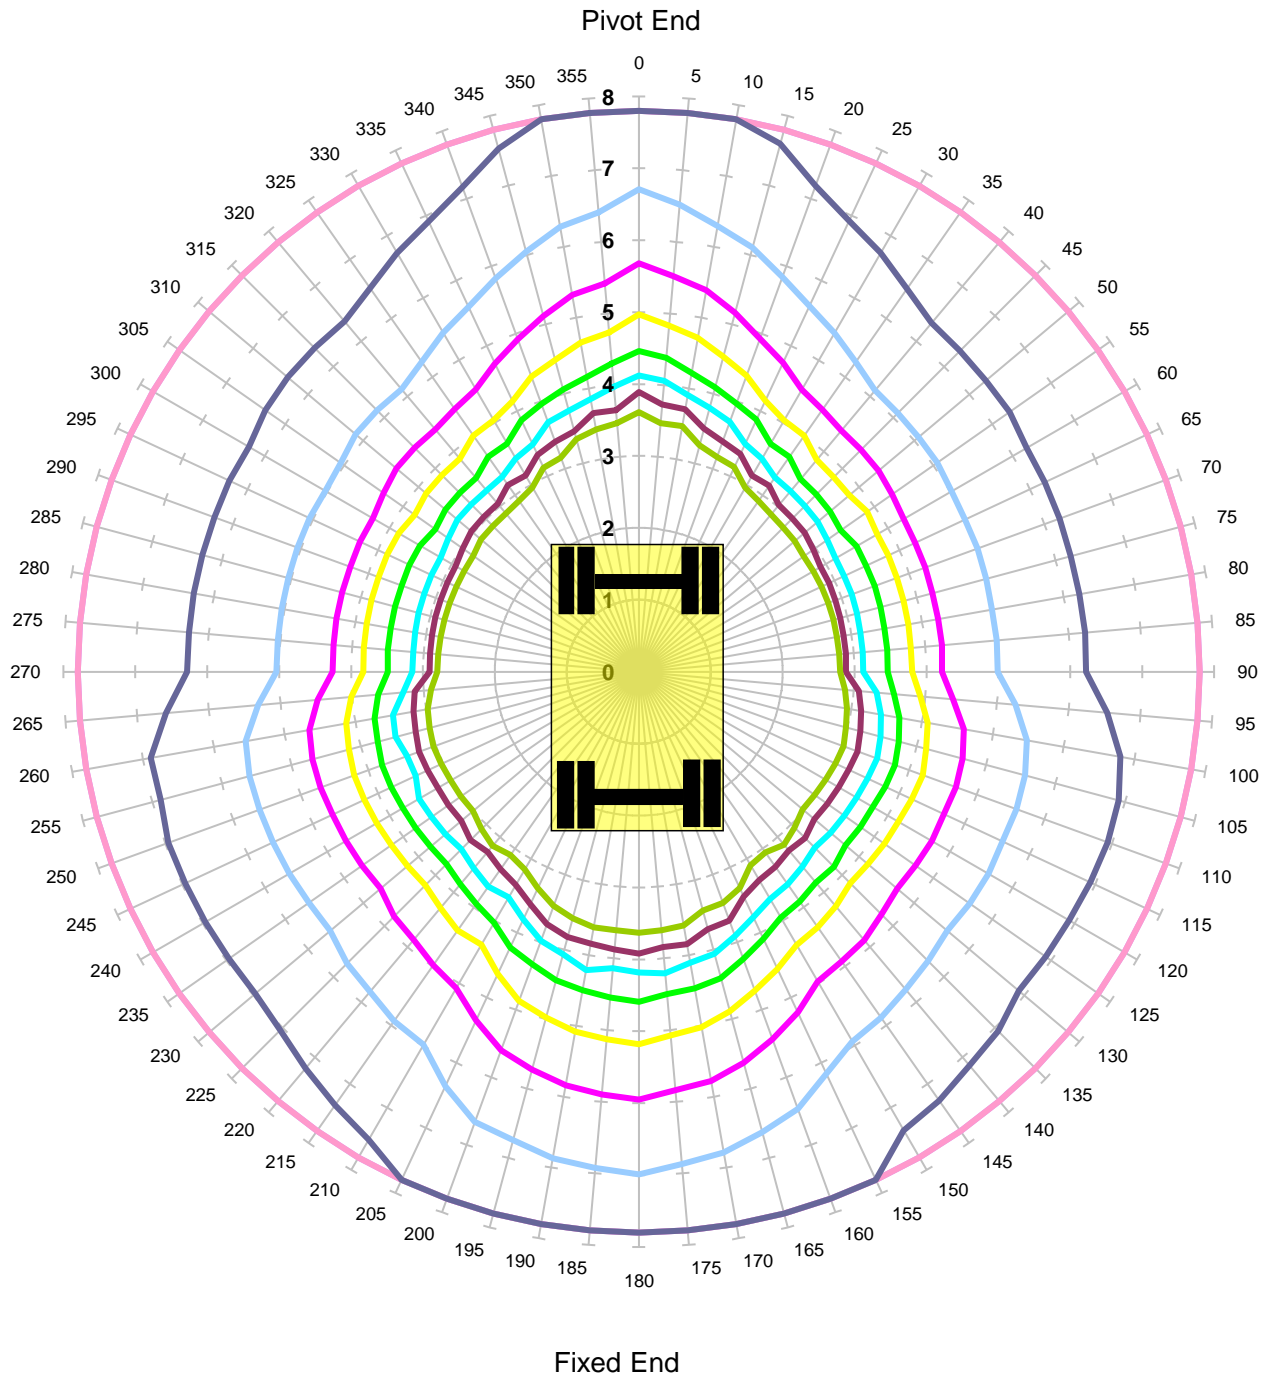

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	71.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH**


Unlocked Rail Cant -150mm - Tandem Lift

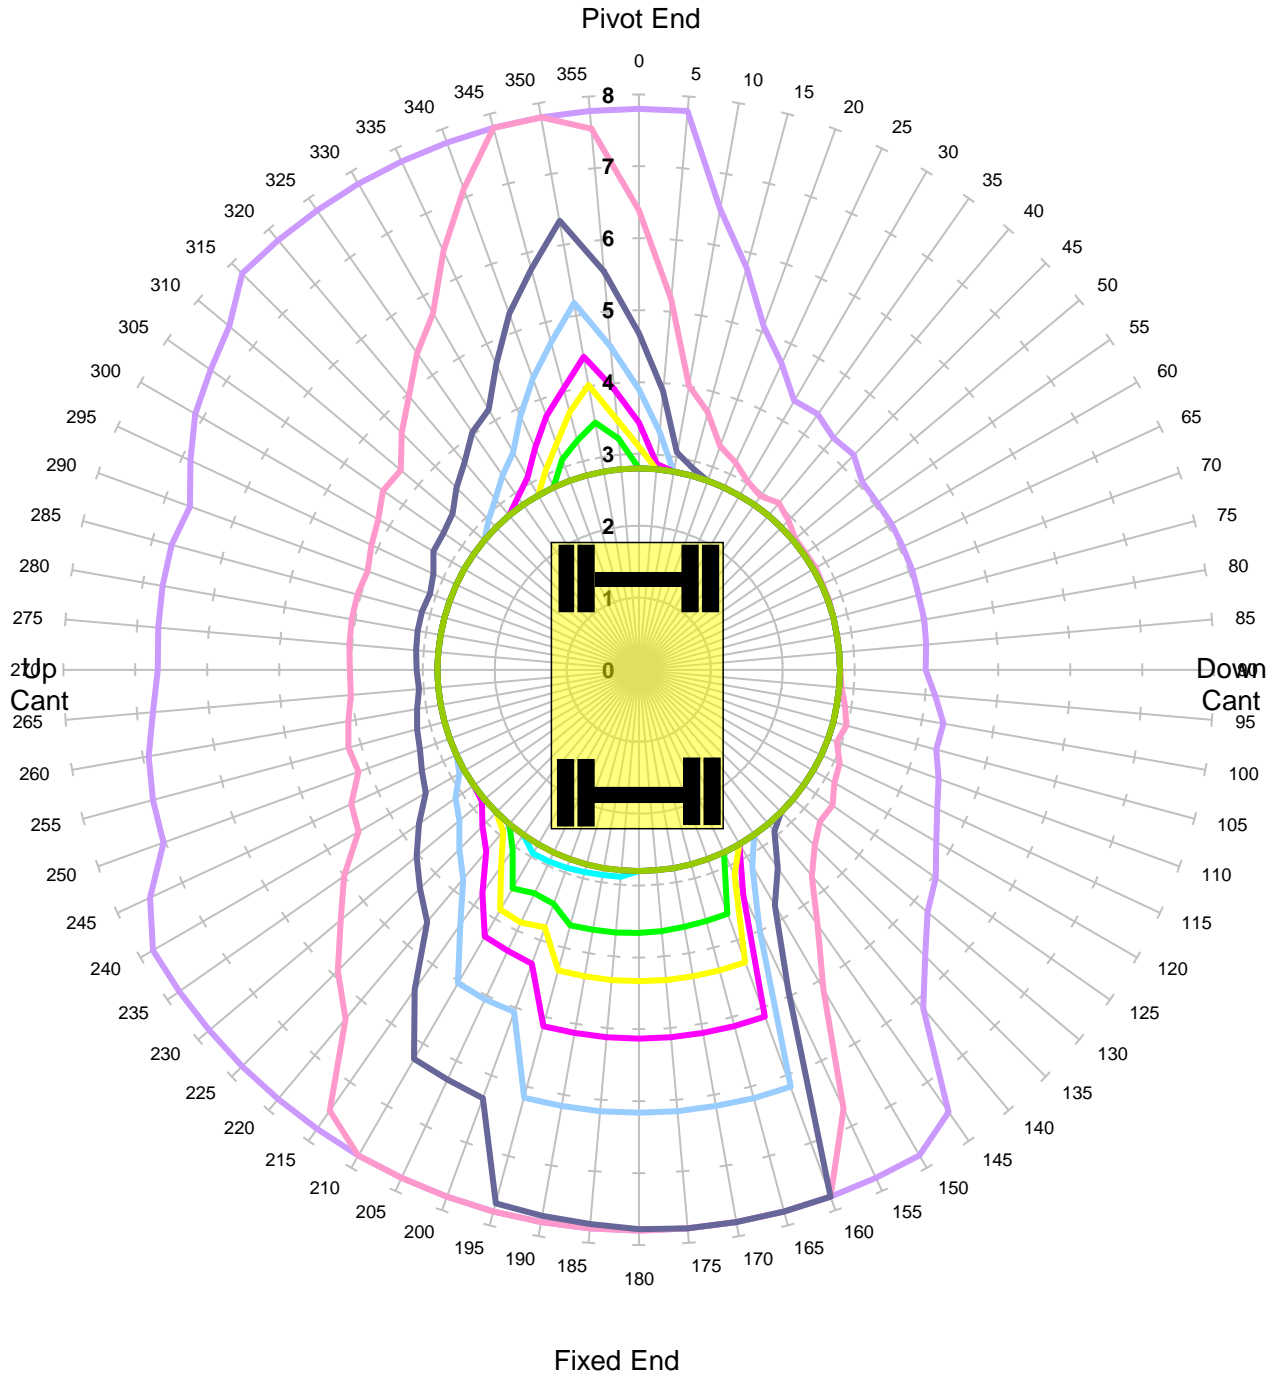

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	44.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH
Unlocked Rail Cant -50mm - Tandem Lift**

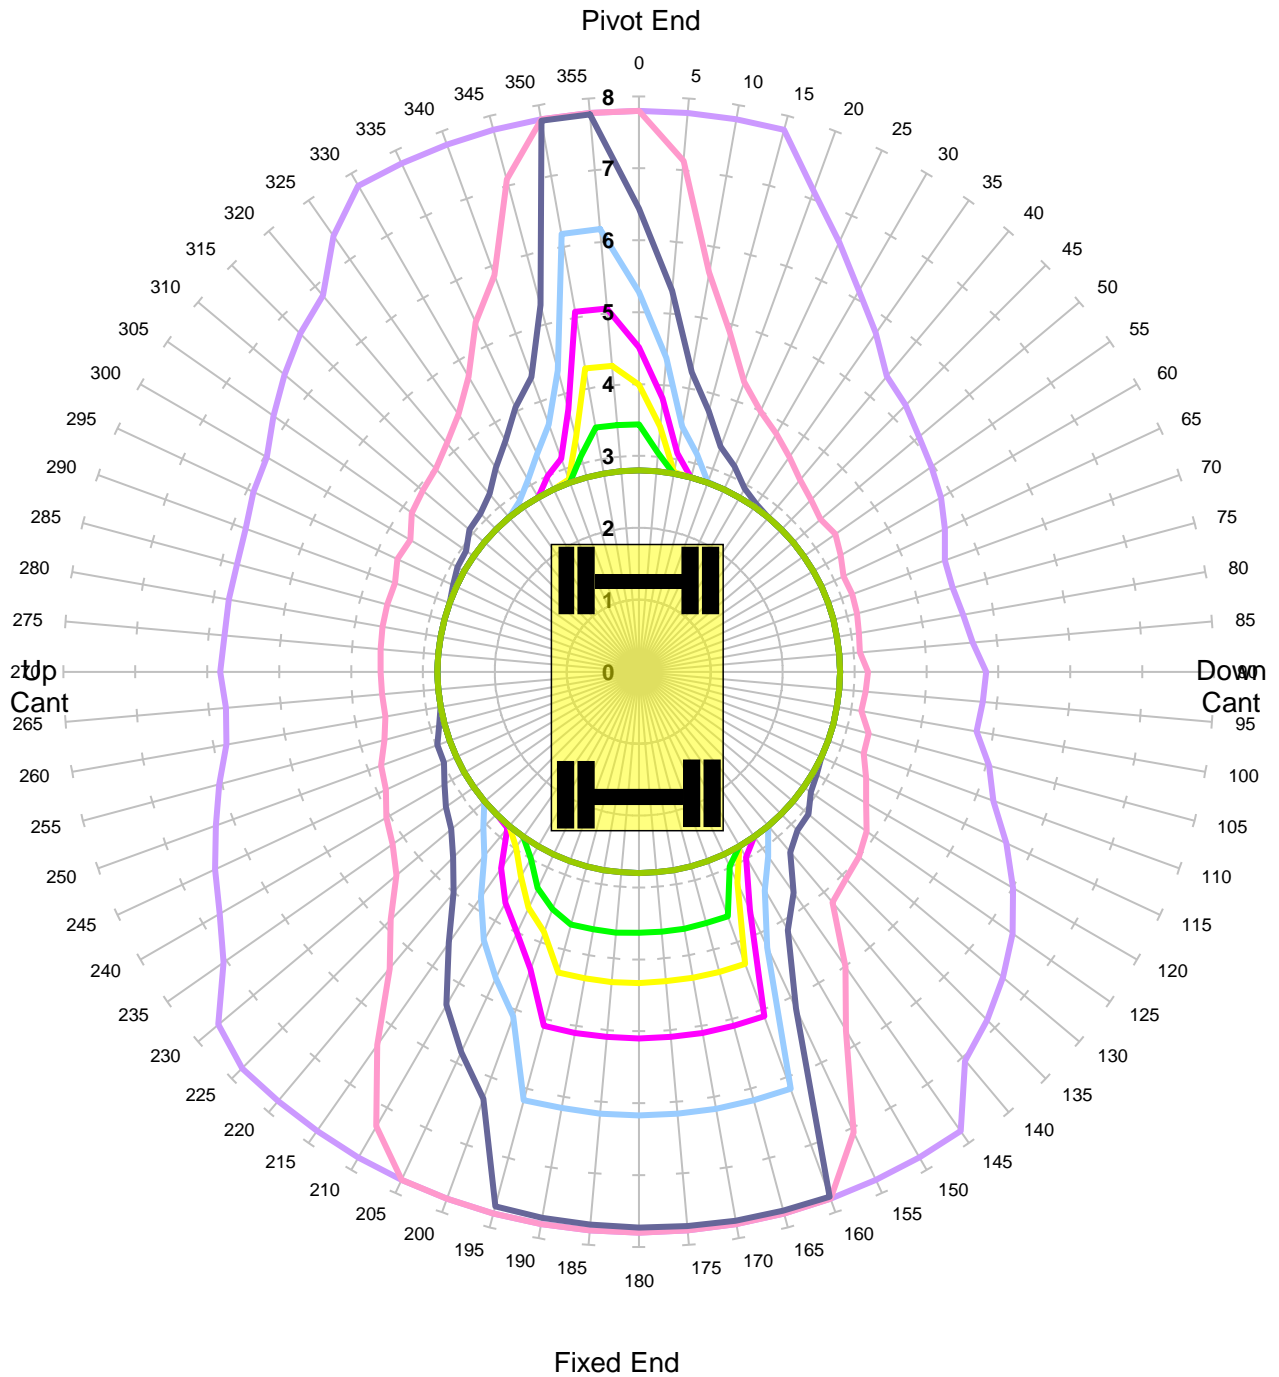

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	44.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Unlocked Rail Cant 50mm - Tandem Lift

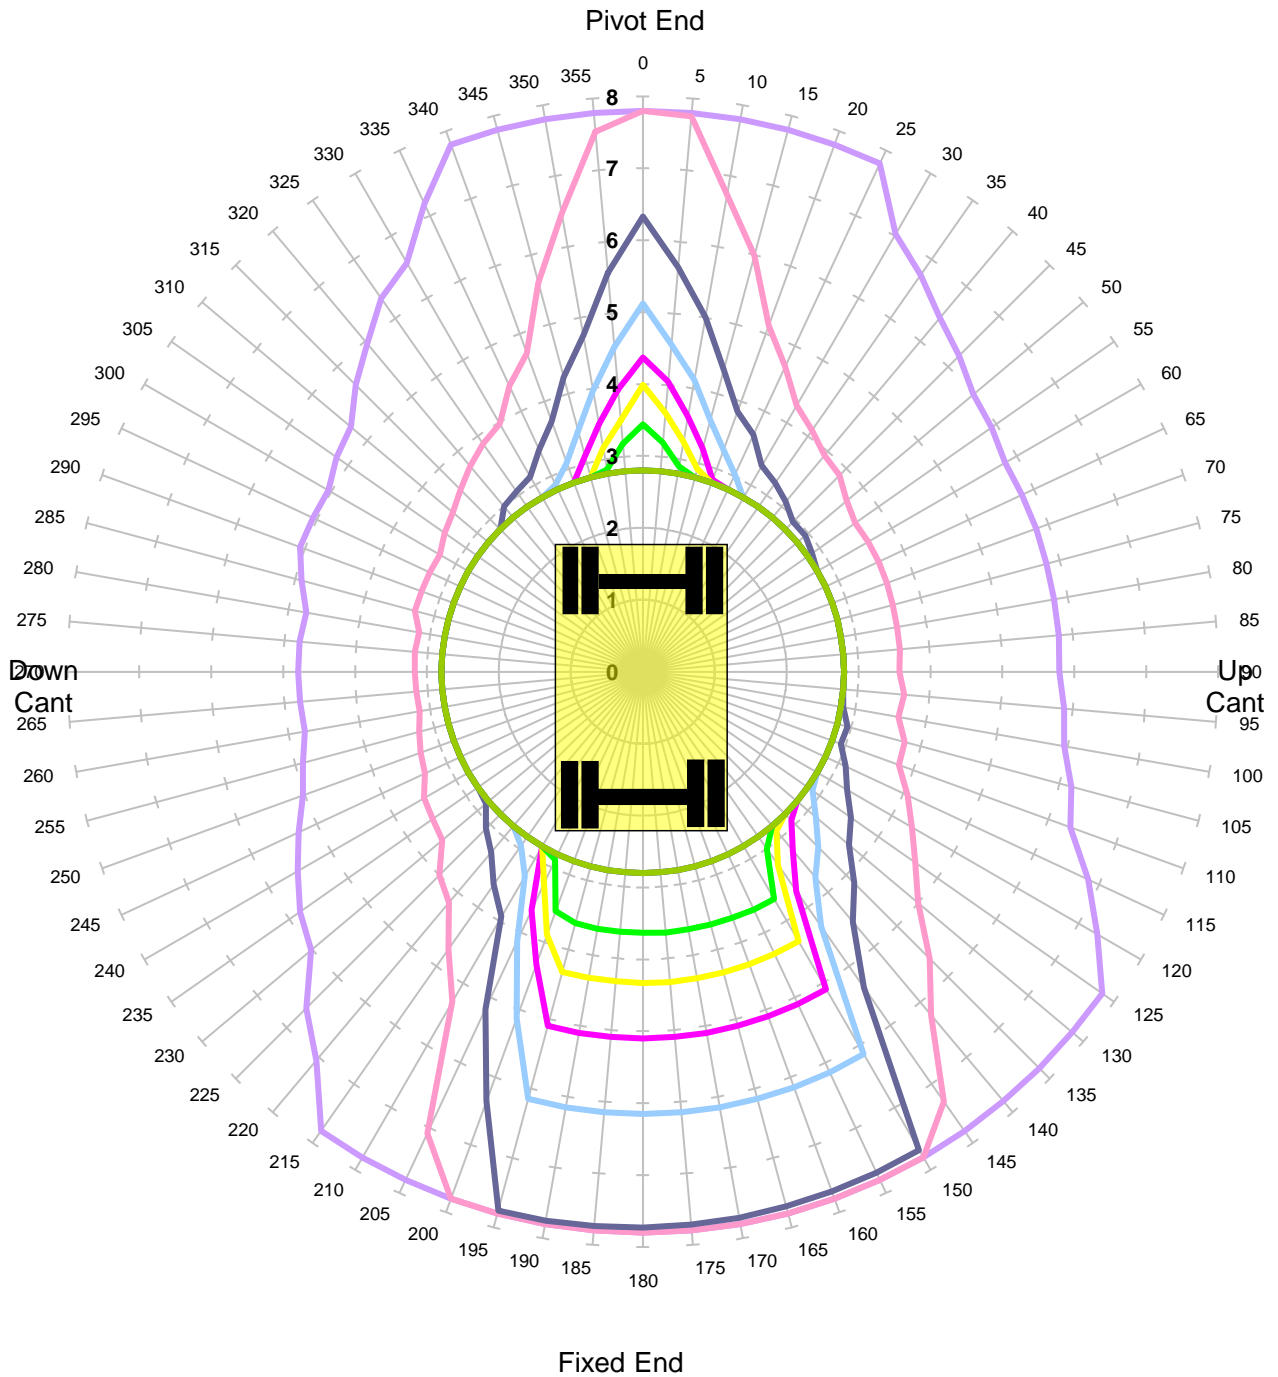

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	44.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH**

Unlocked Rail Cant 150mm - Tandem Lift

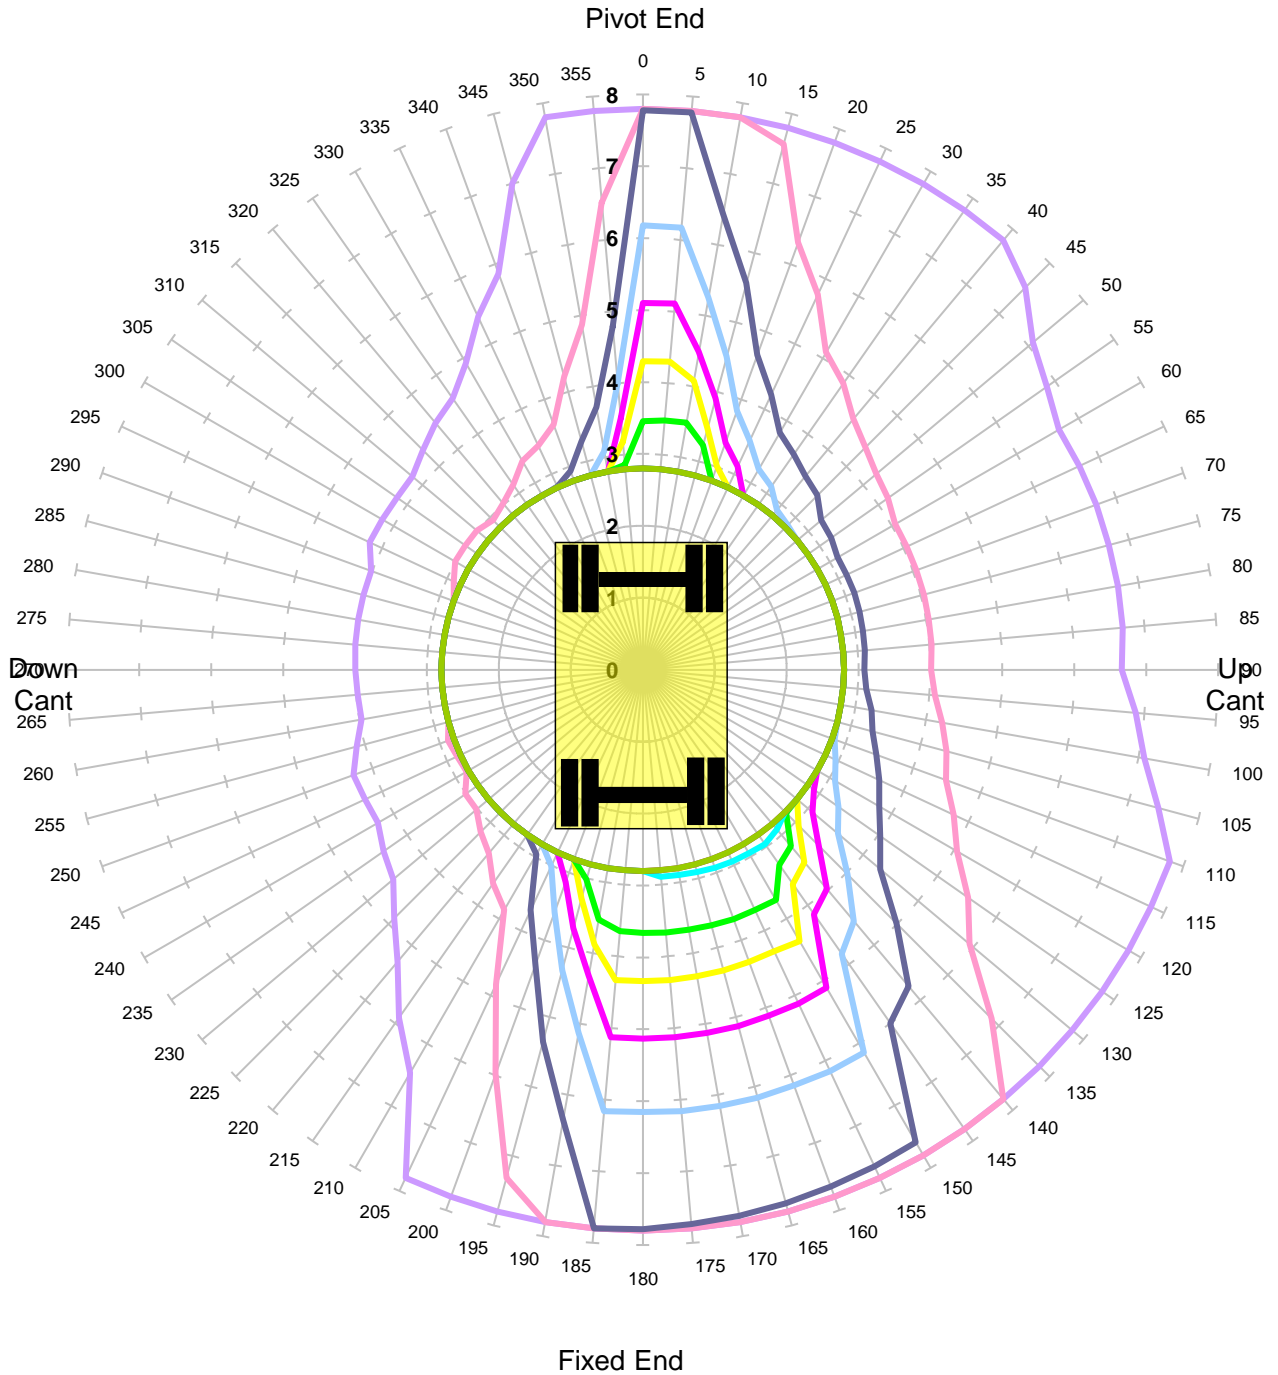

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	44.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH**


Locked Rail Cant -150mm - Tandem Lift

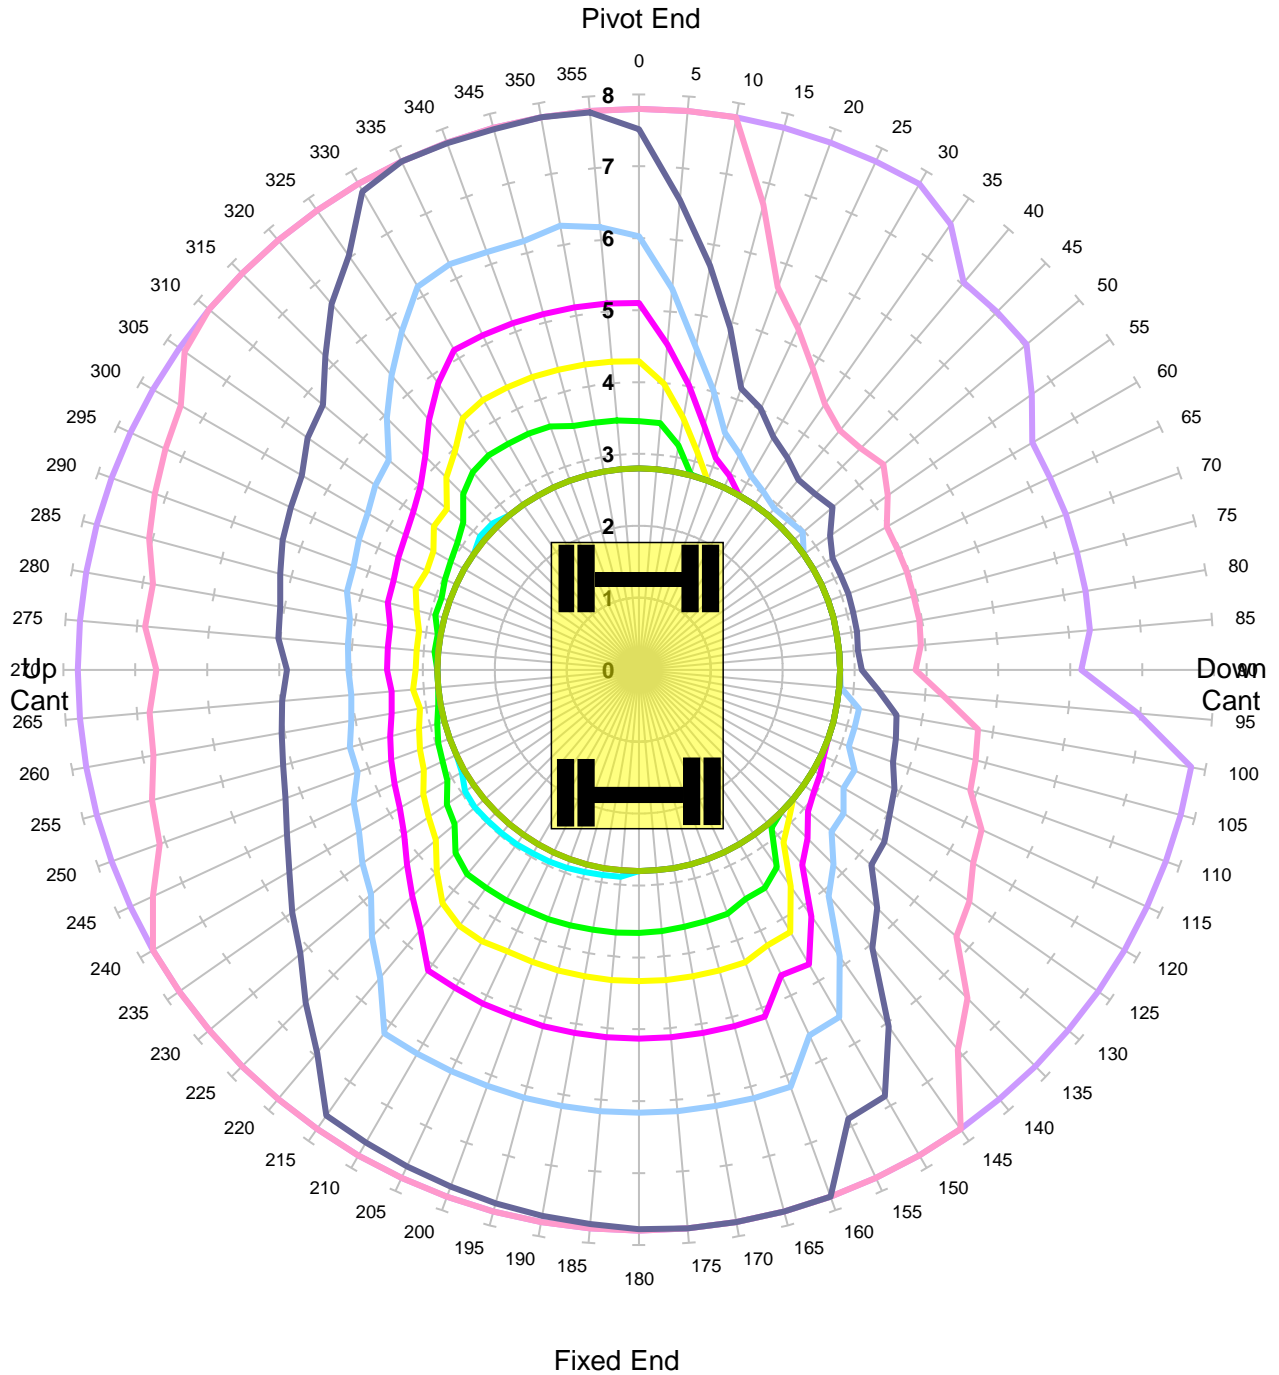

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	59.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant -50mm - Tandem Lift**

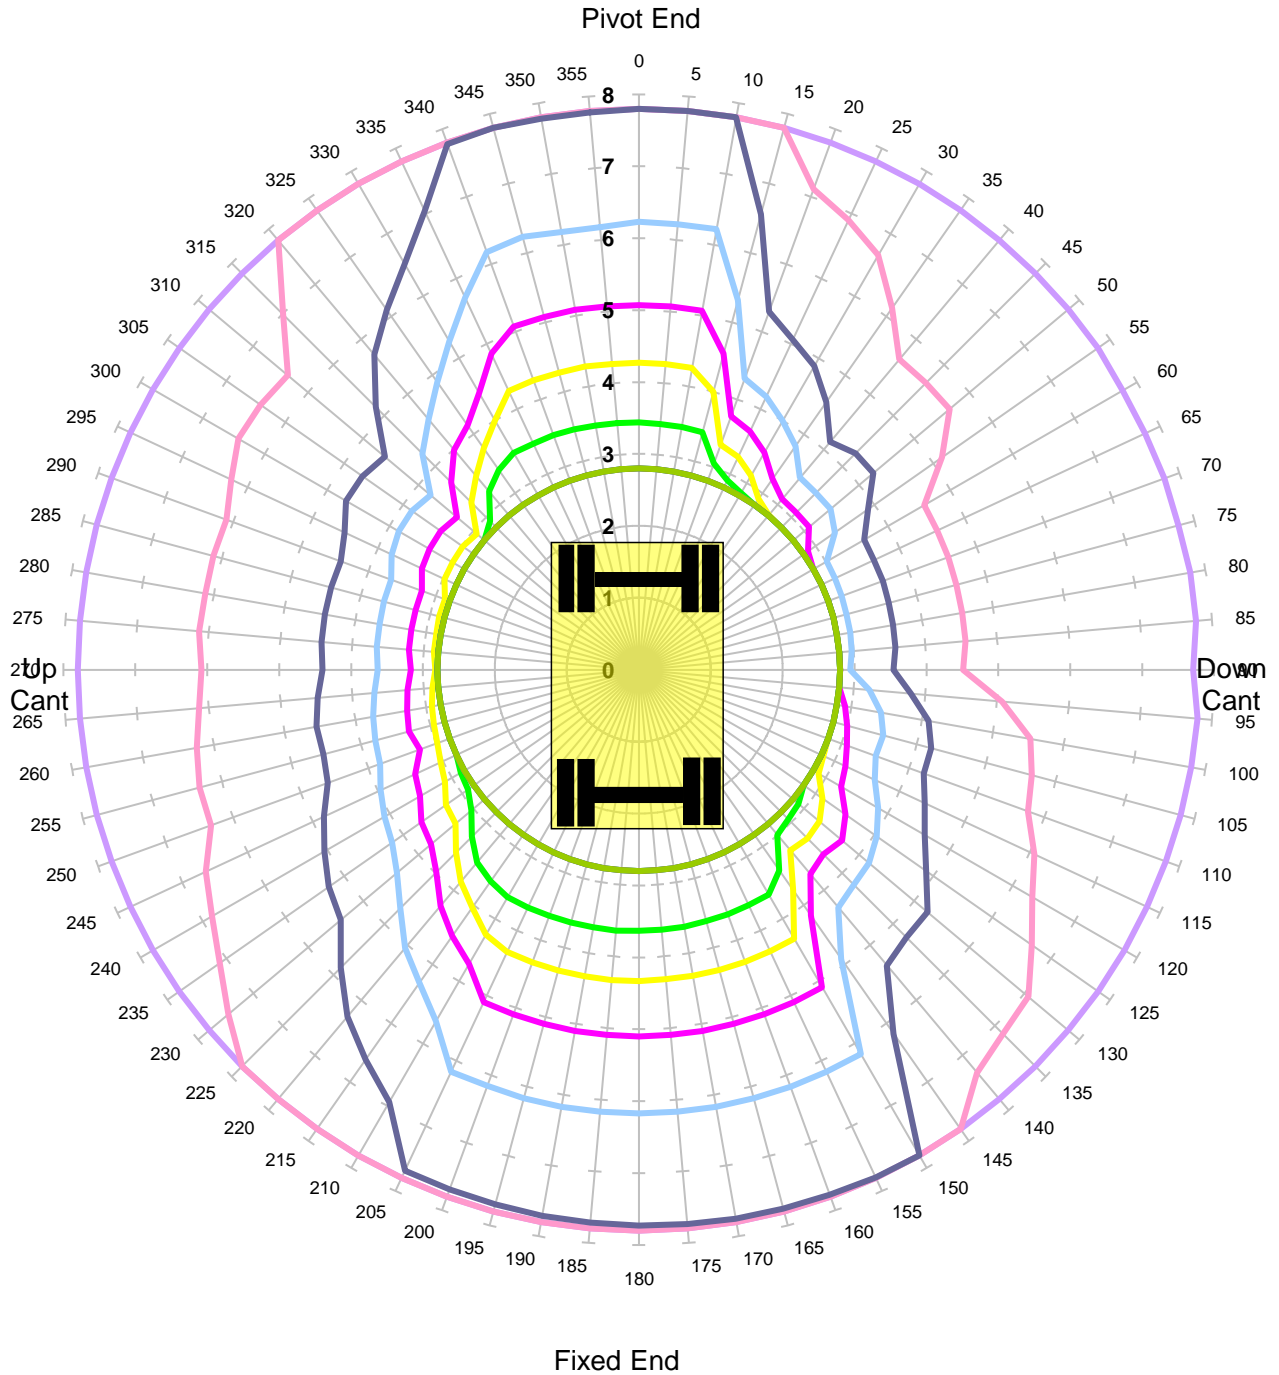


Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	59.0%
COMMENT:			

Liebherr 924


**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 50mm - Tandem Lift**

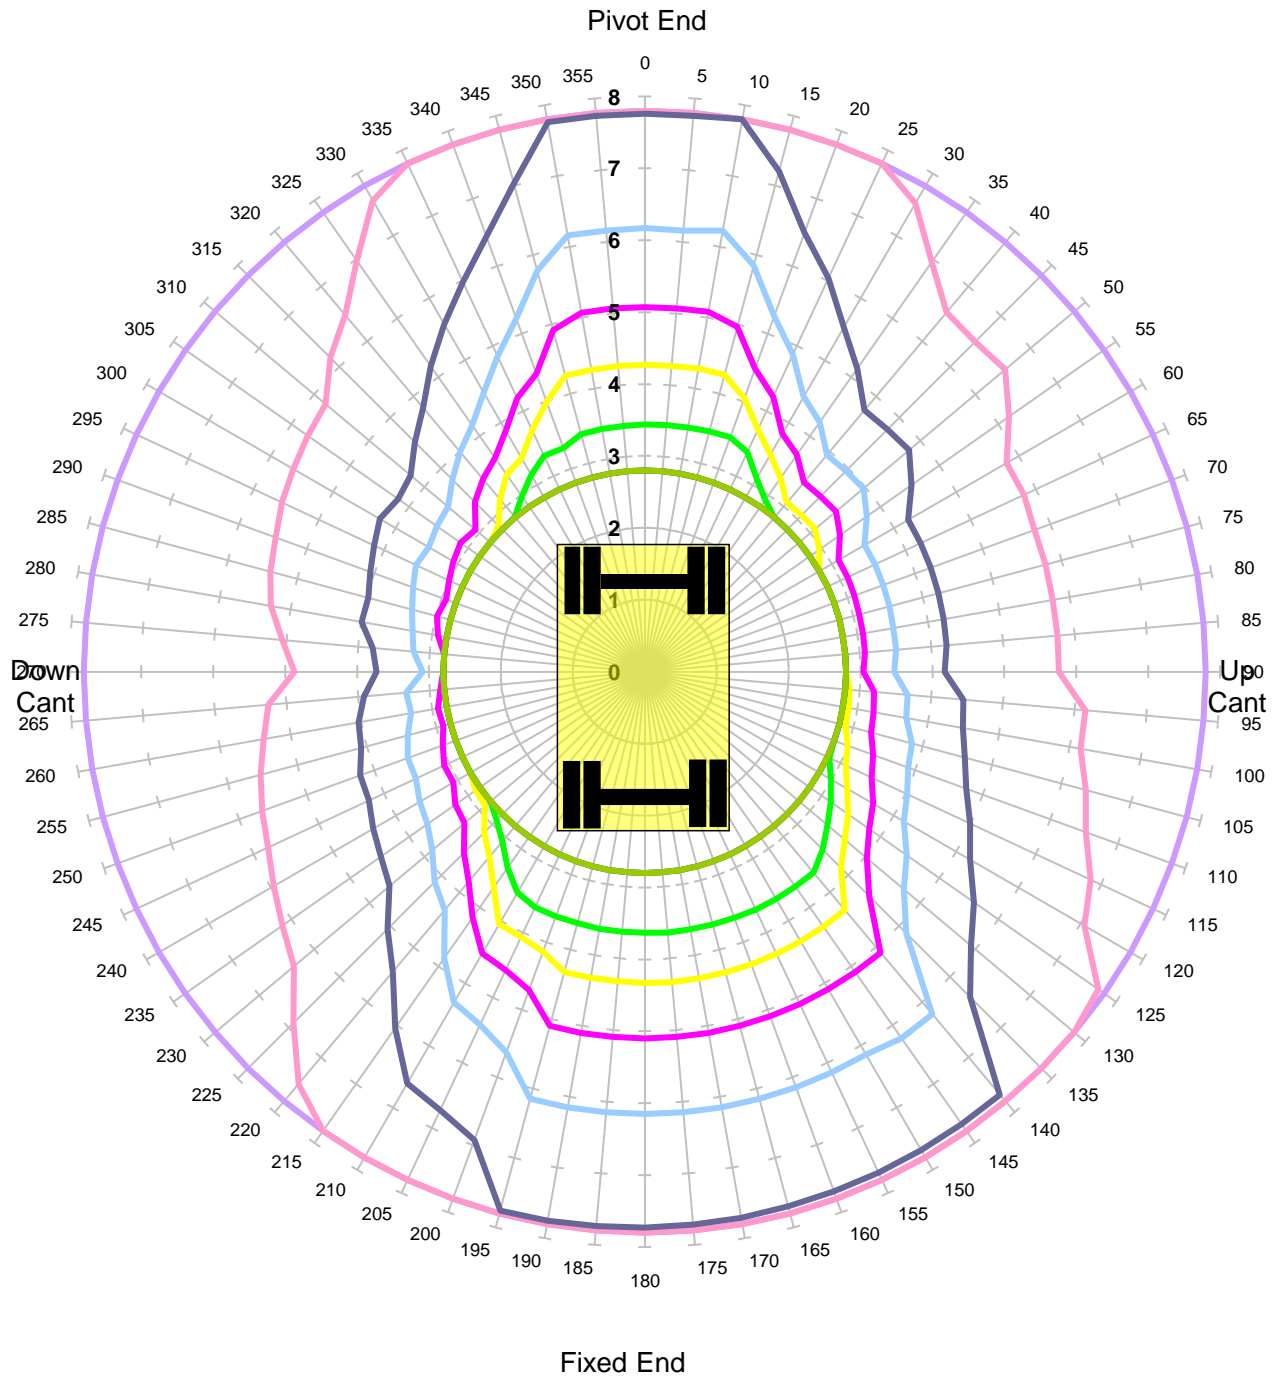

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	59.0%
COMMENT:			

Liebherr 924


**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift QH
Locked Rail Cant 150mm - Tandem Lift**

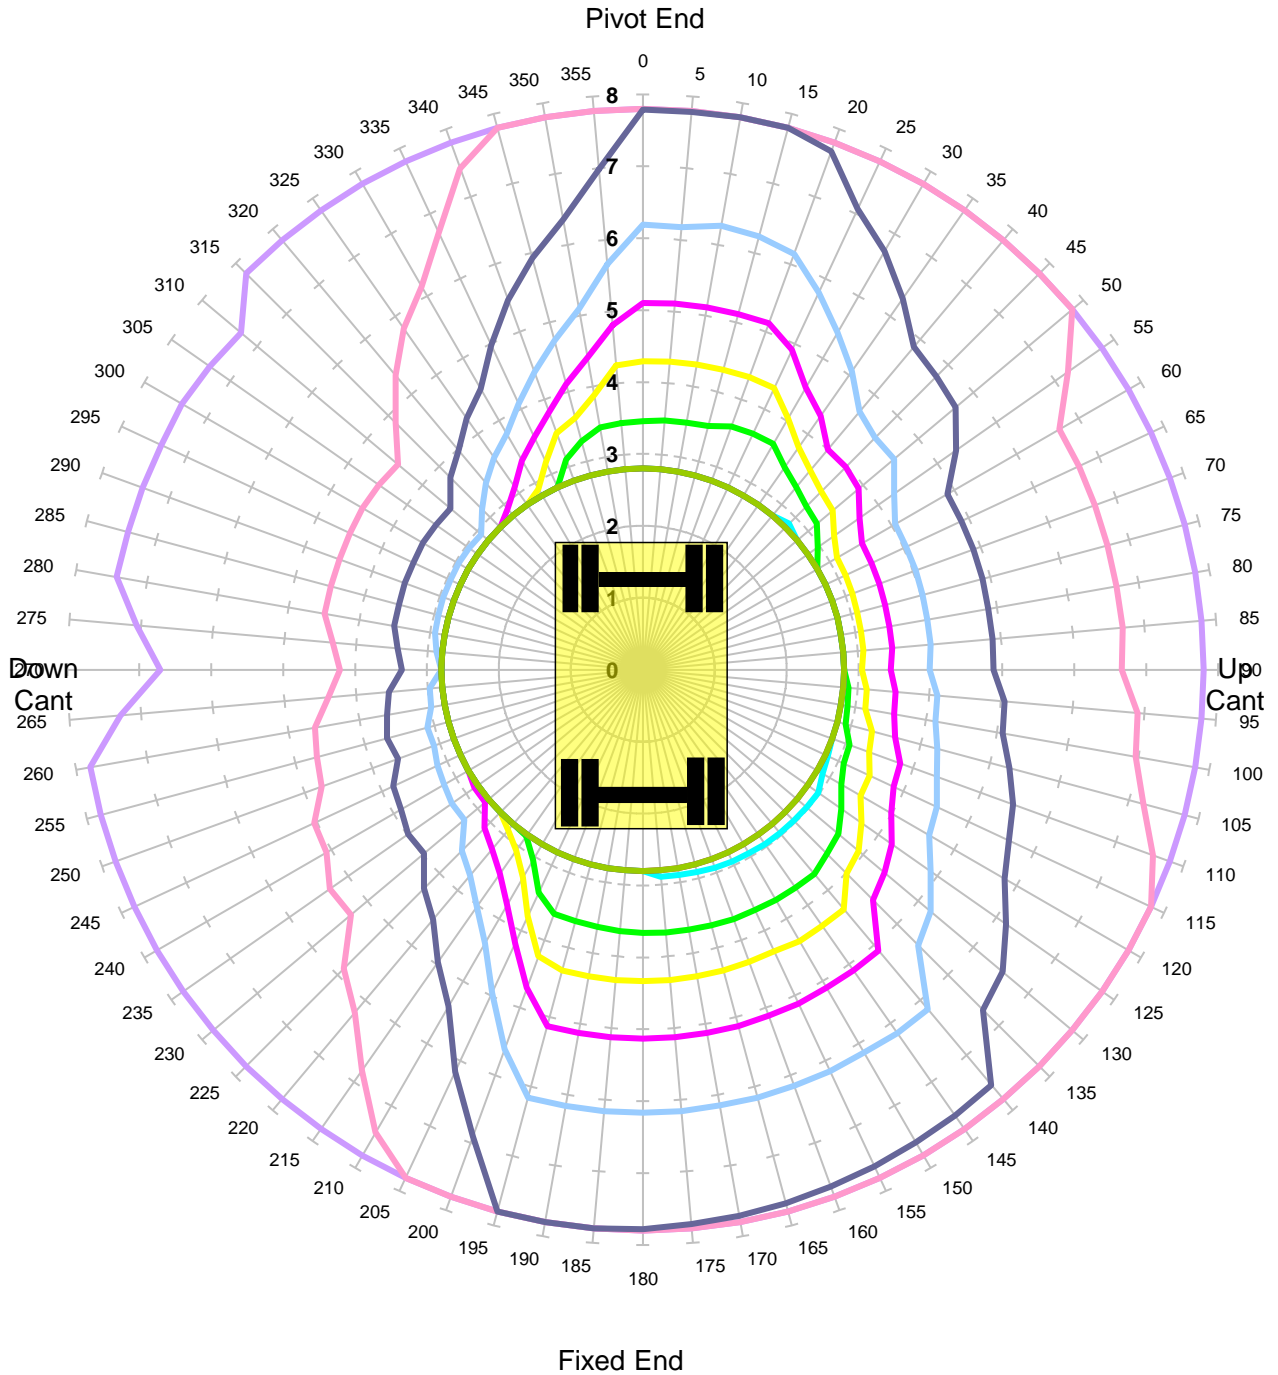

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	59.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift QH
Unlocked Road - Tandem Lift**

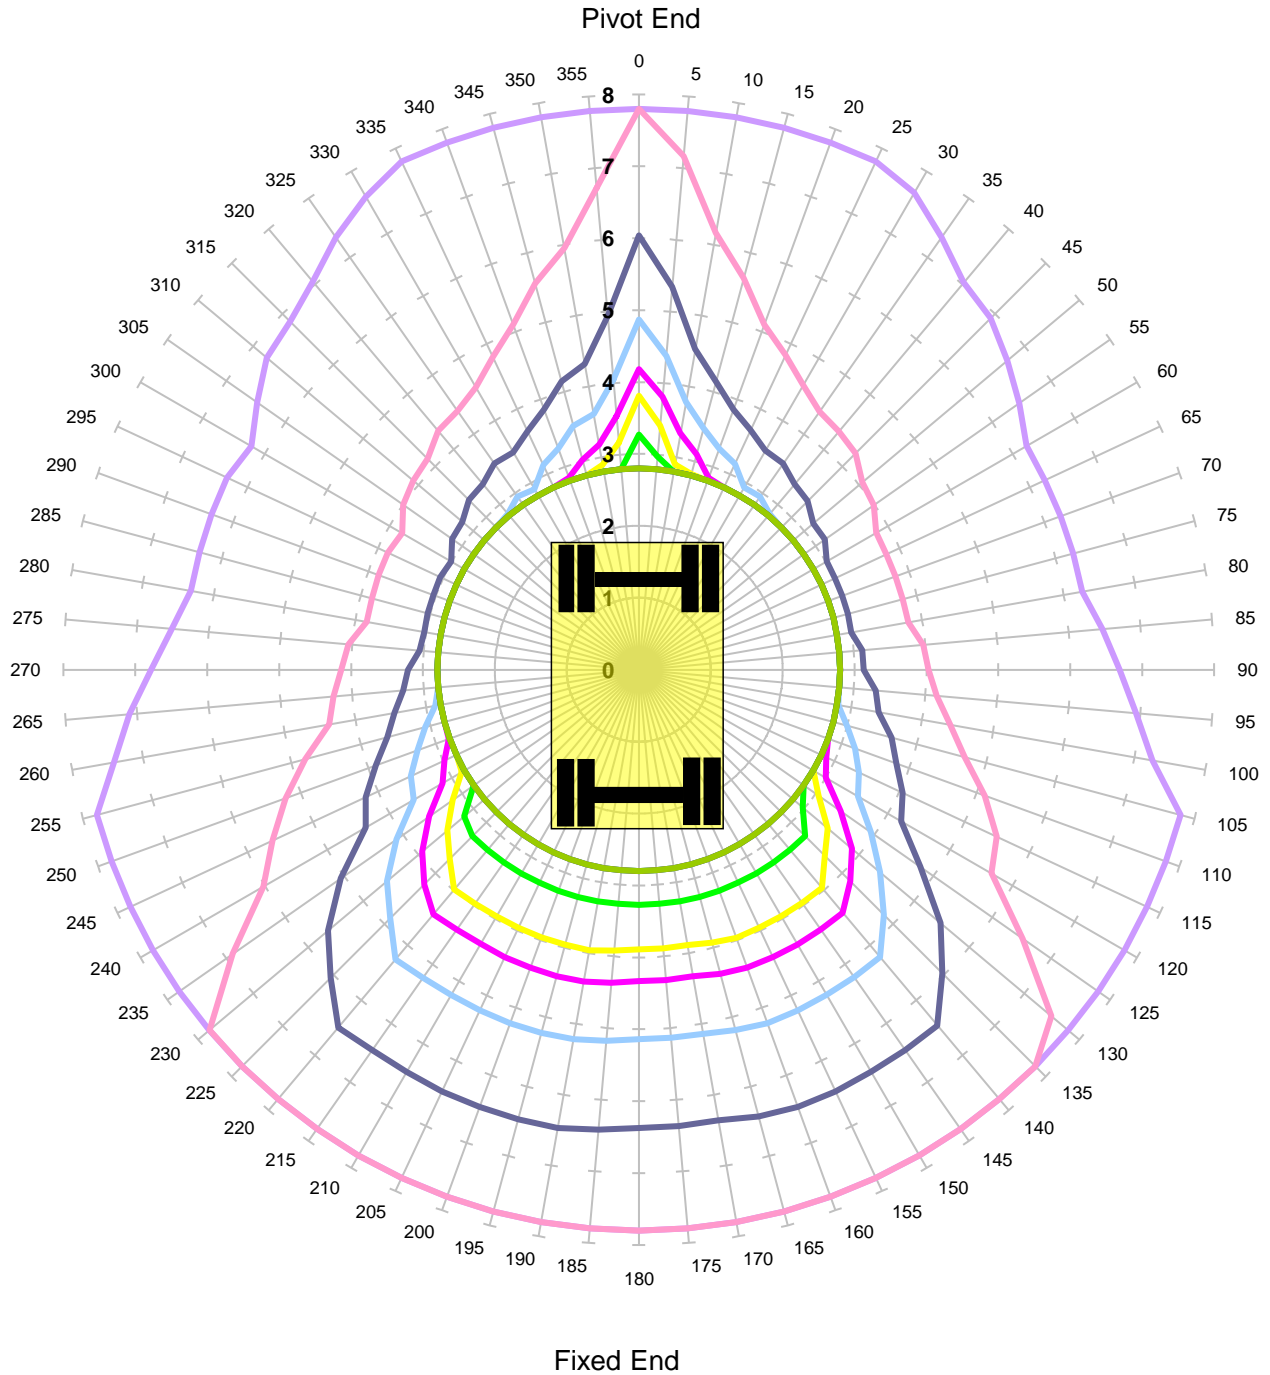

Units in Tonnes


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	47.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift QH**

Locked Road - Tandem Lift

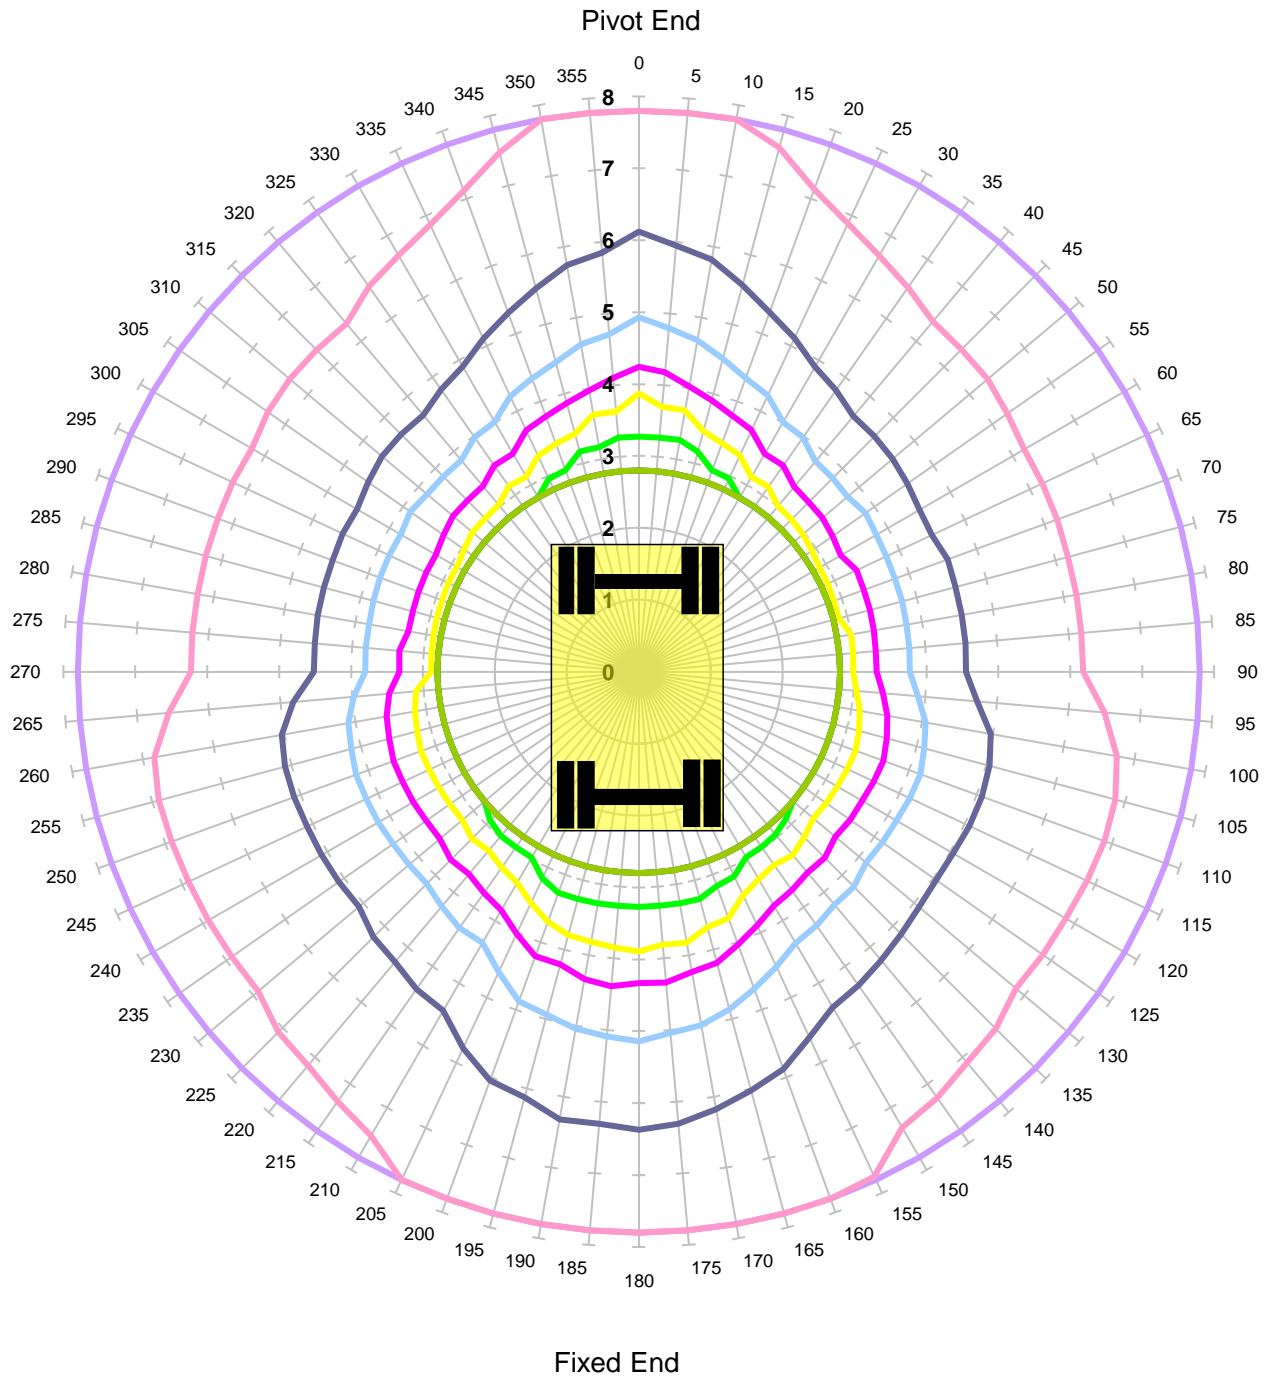

Units in Tonnes

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

MACHINE & MODEL:	Liebherr 924	REFERENCE:	
SERIAL No:	K130283	DATE OF CHART:	28-Jun-2023
EQUIPMENT:	2.08m + 3.4m + 1.85m	SAFETY FACTOR:	47.0%
COMMENT:			