


Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant -150mm

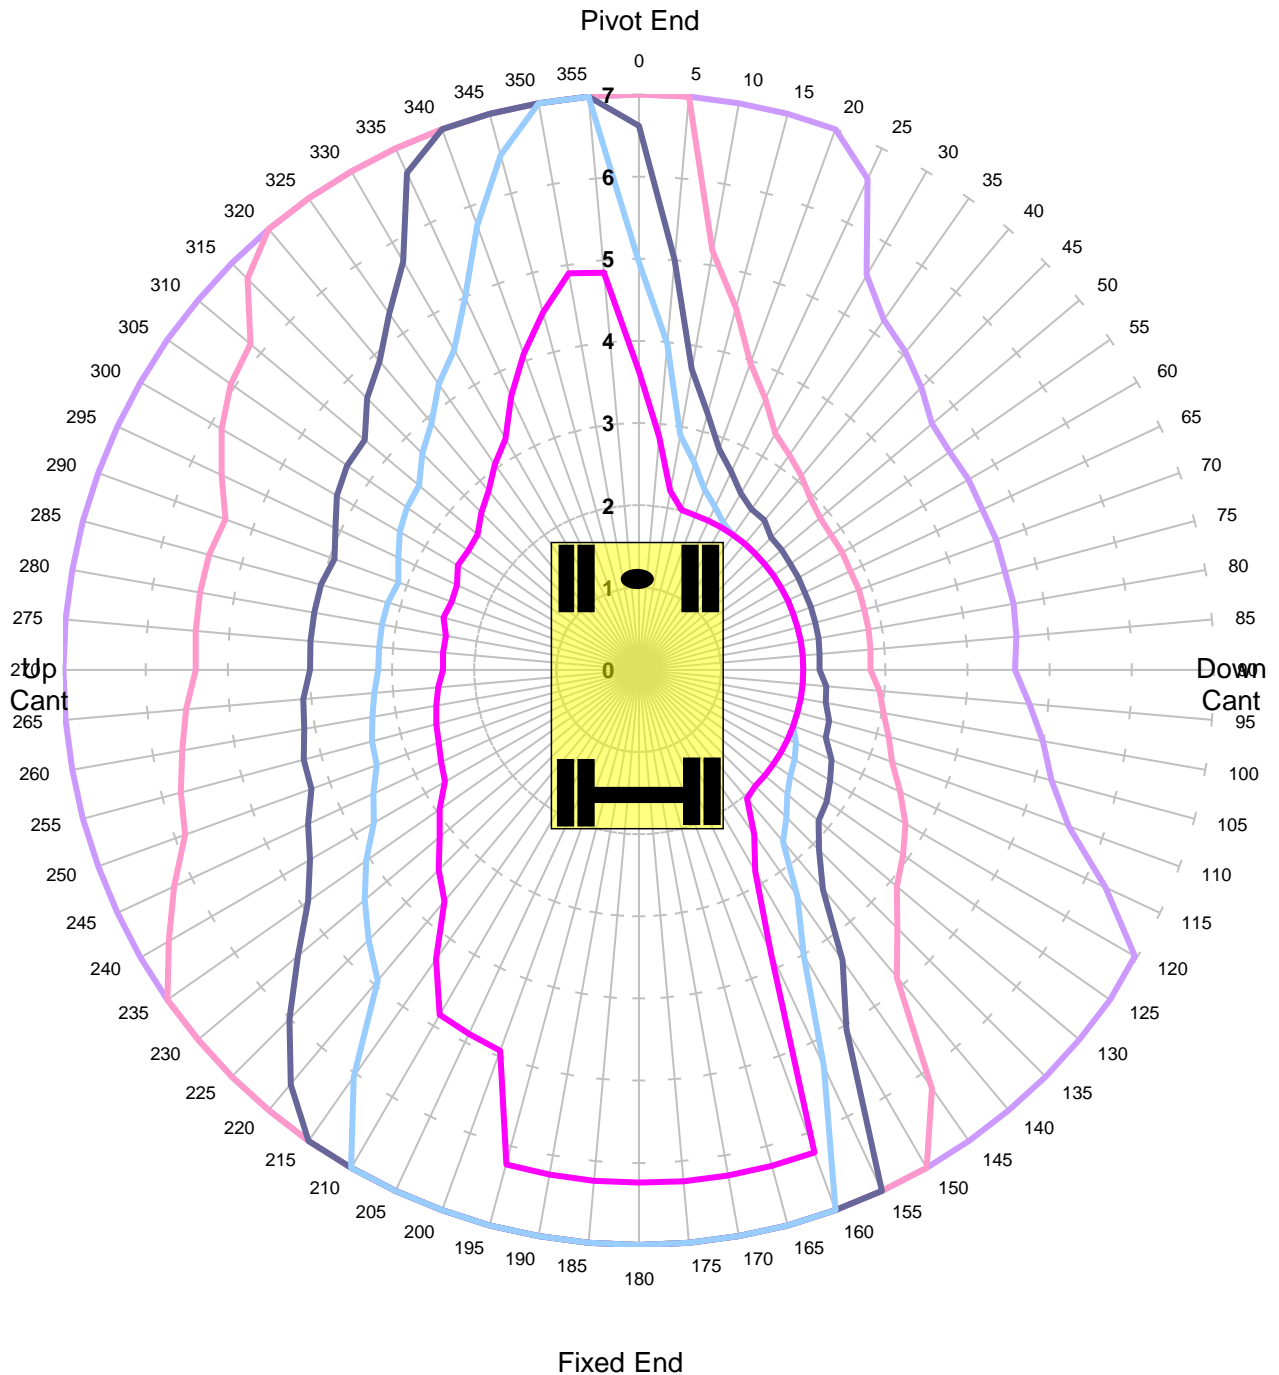

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant -50mm

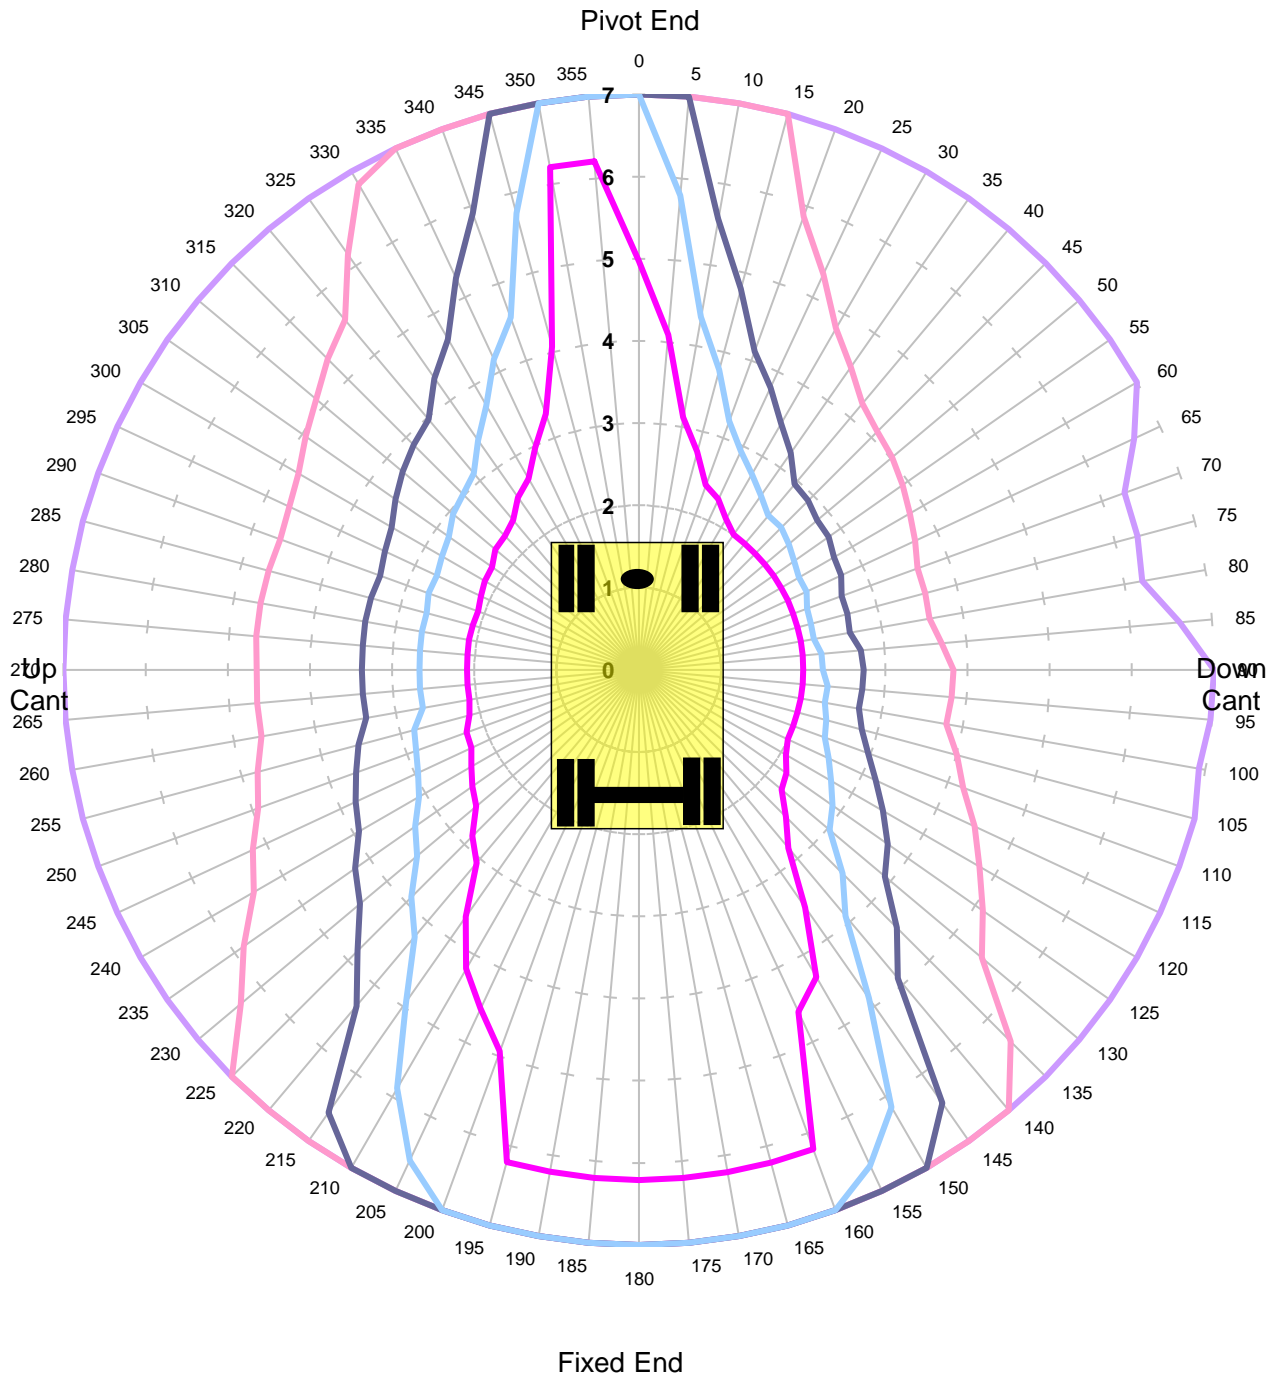

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant 50mm

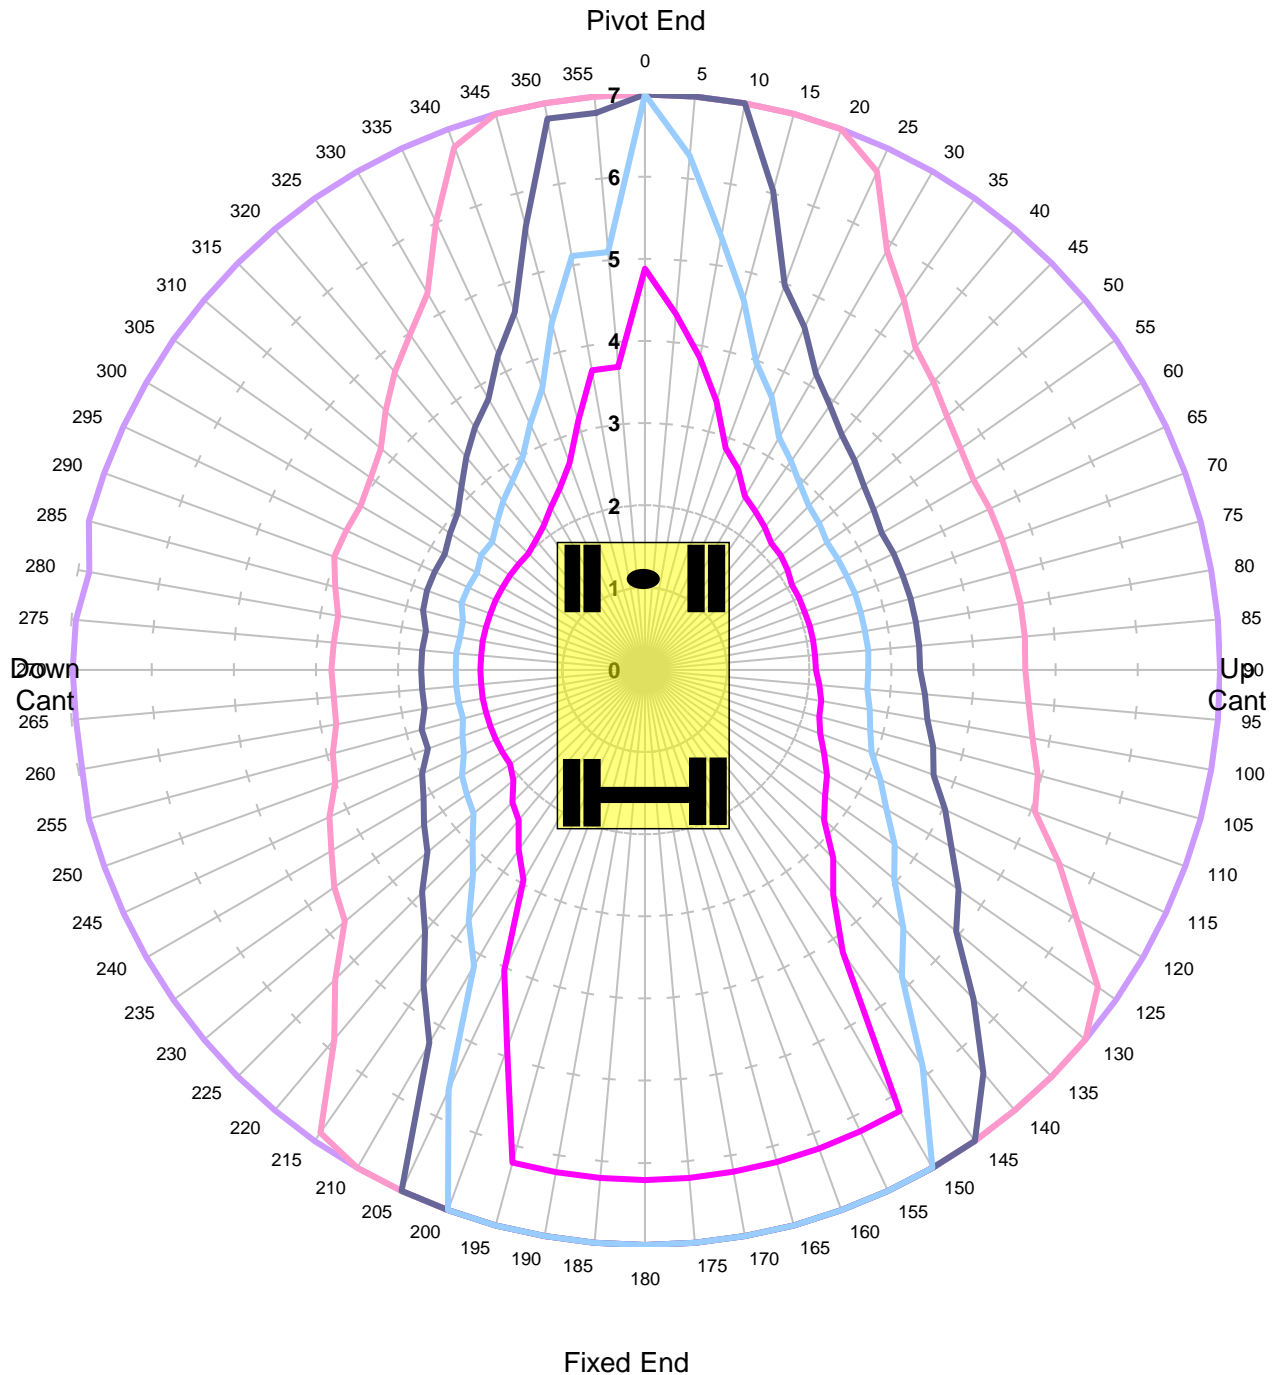

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant 150mm

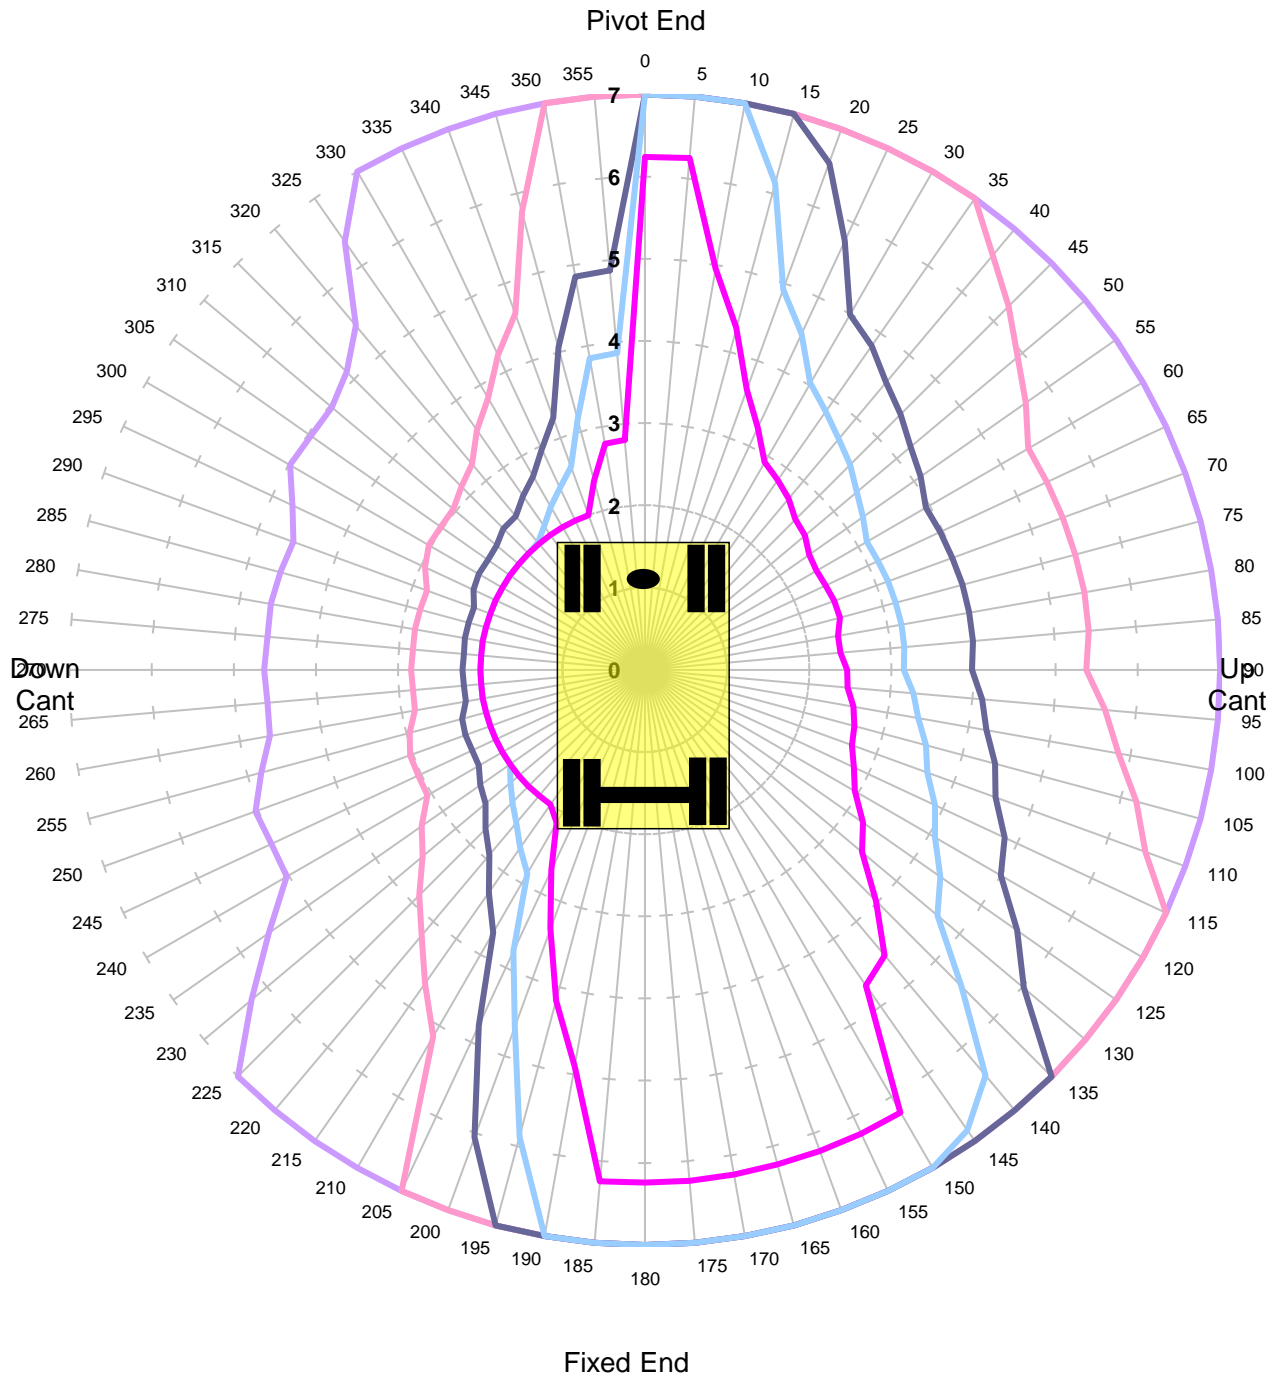

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant -150mm

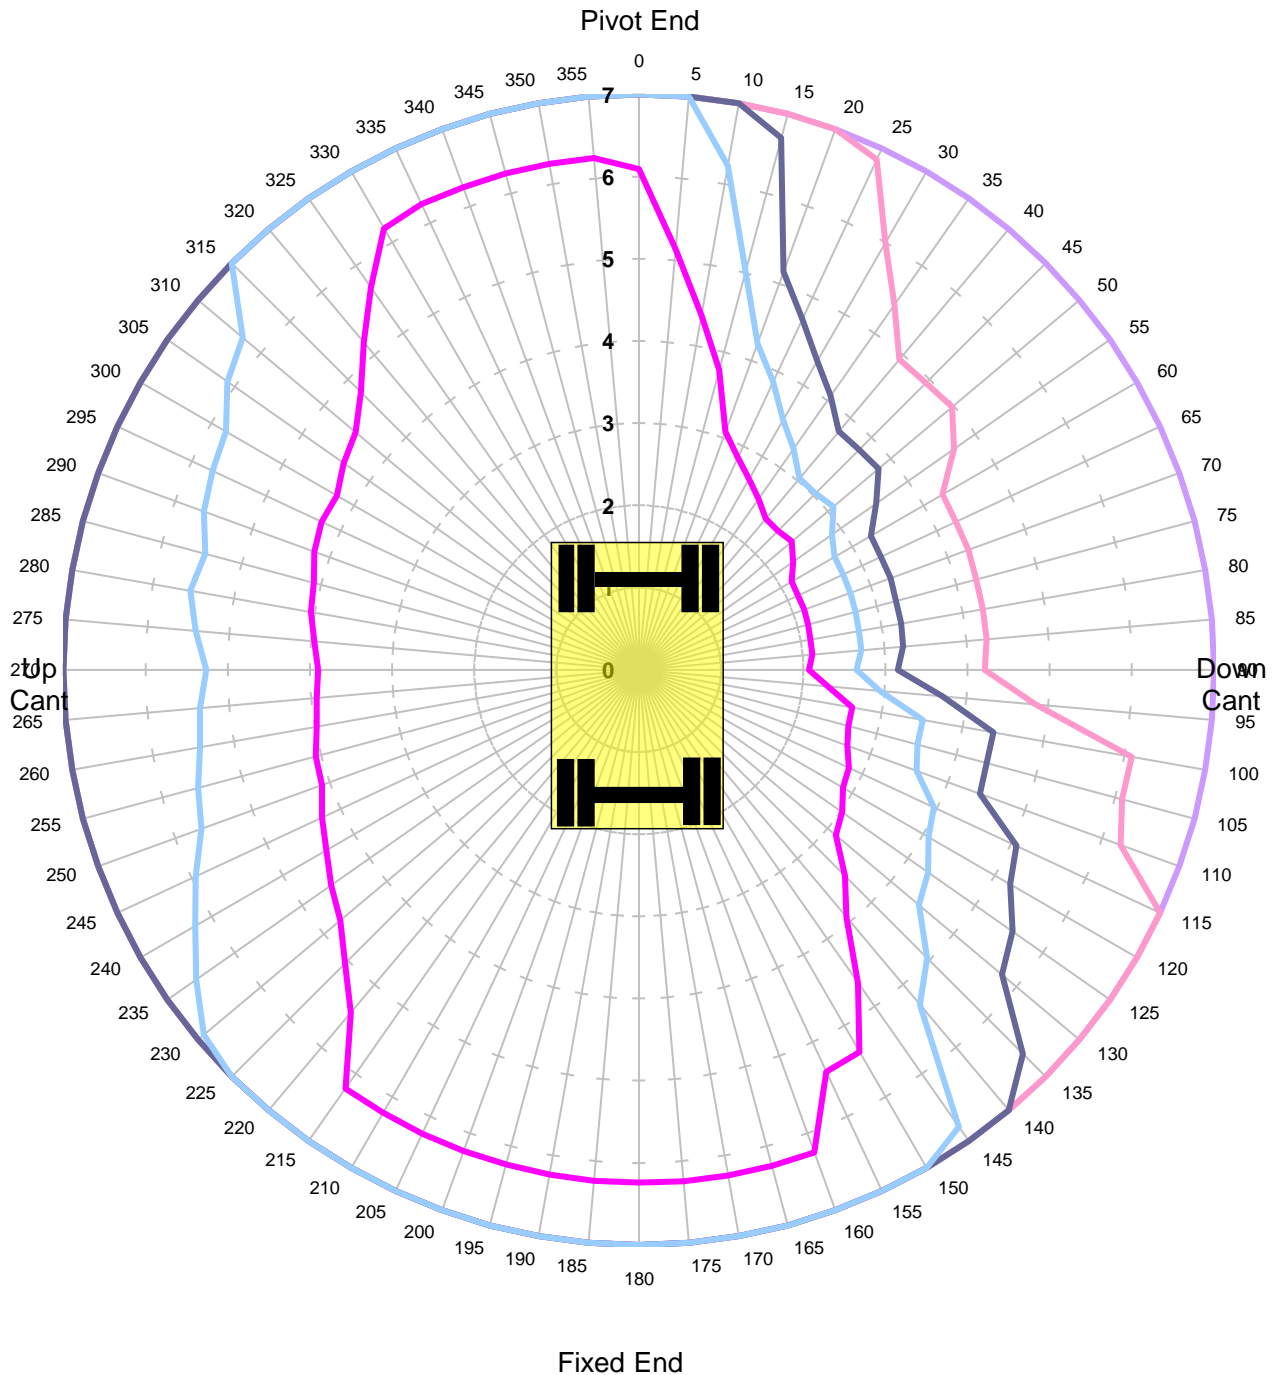

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant -50mm

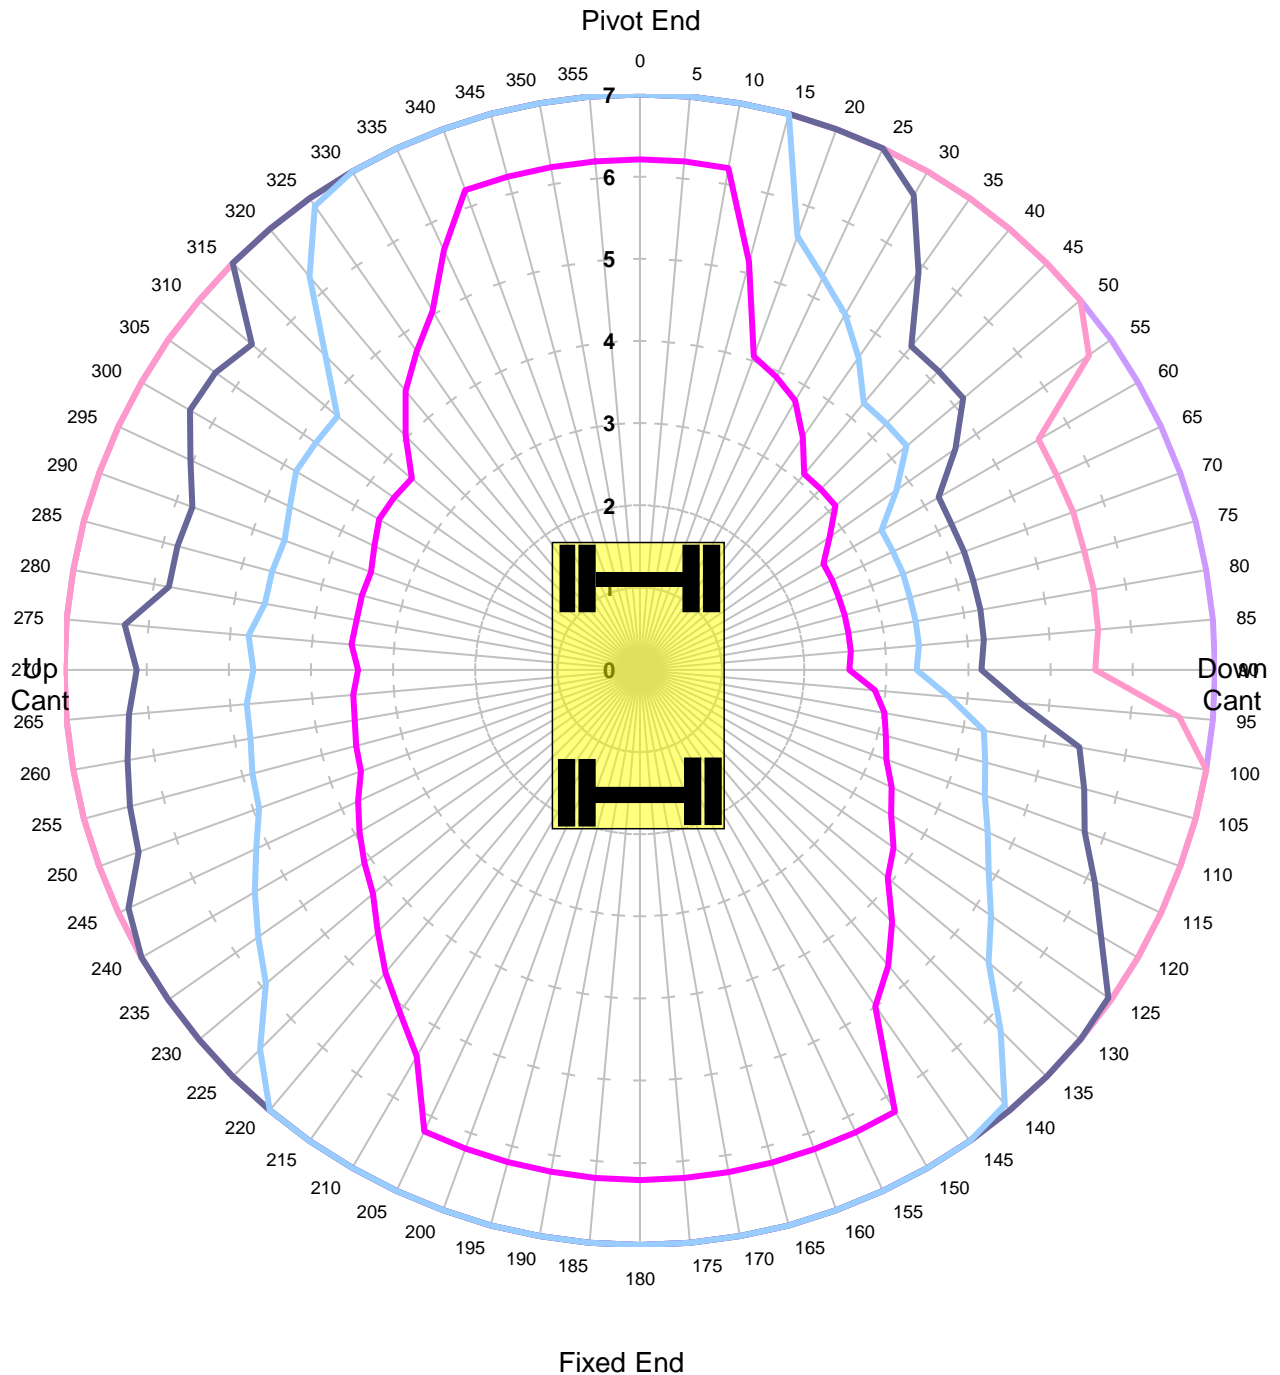

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant 50mm

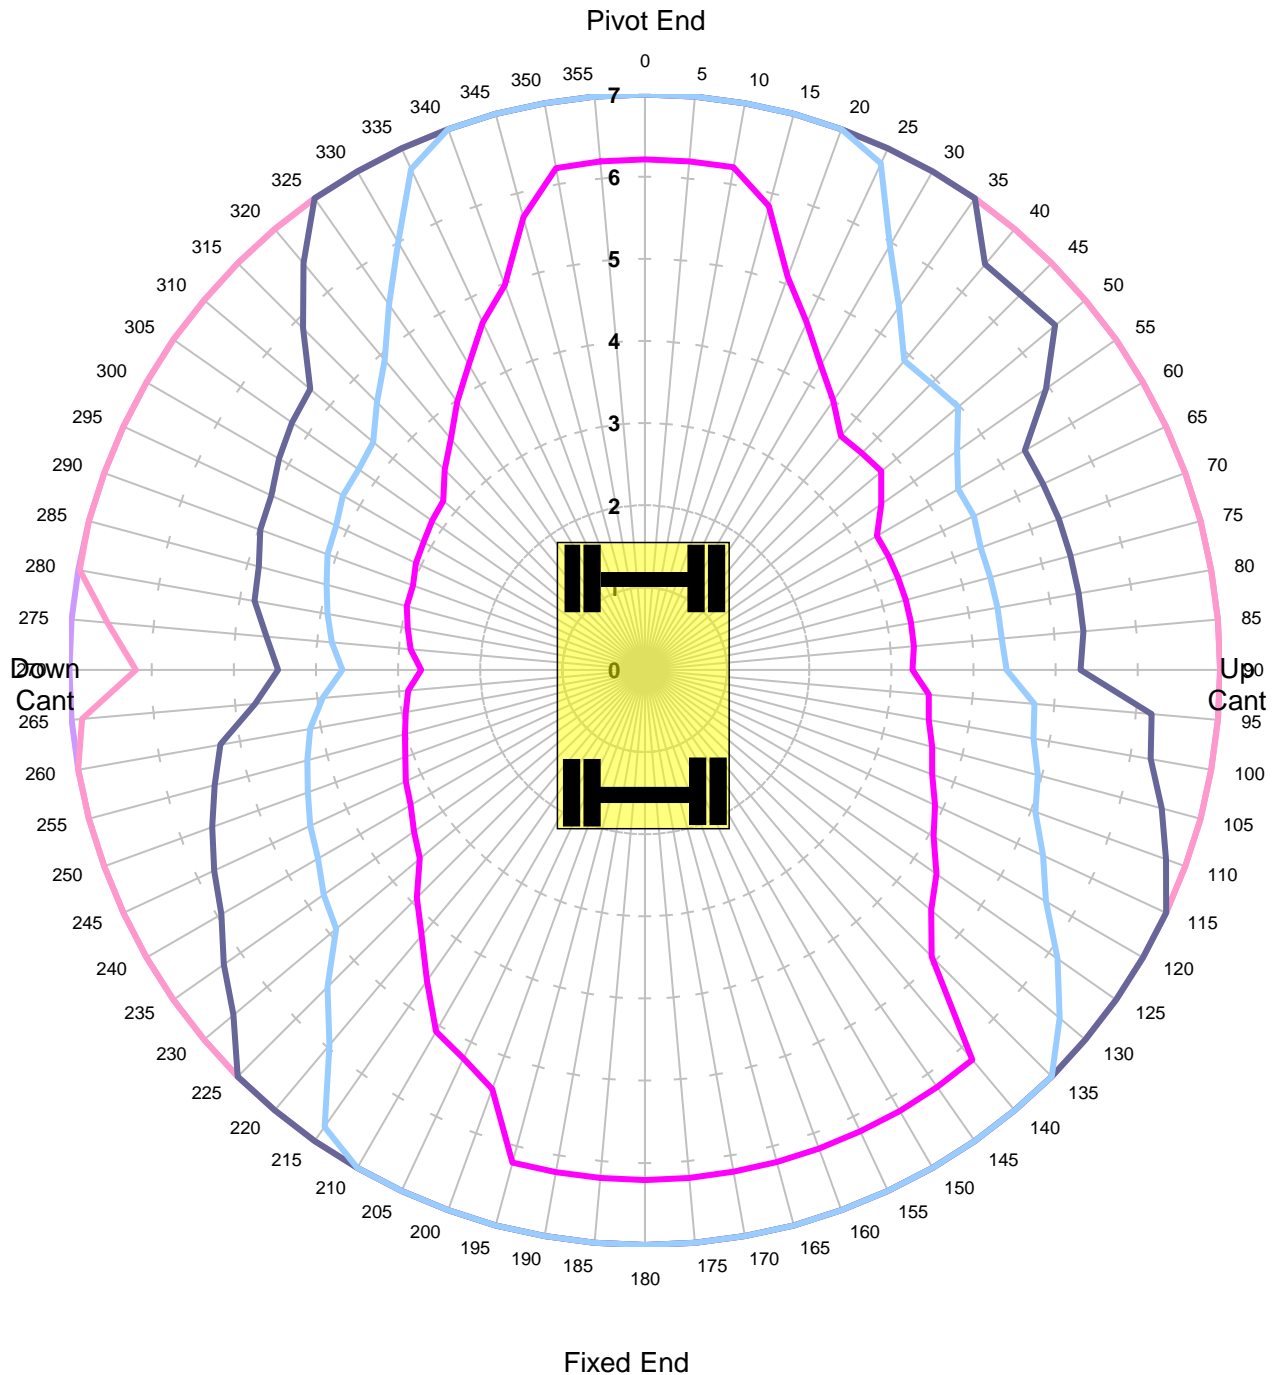


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 150mm

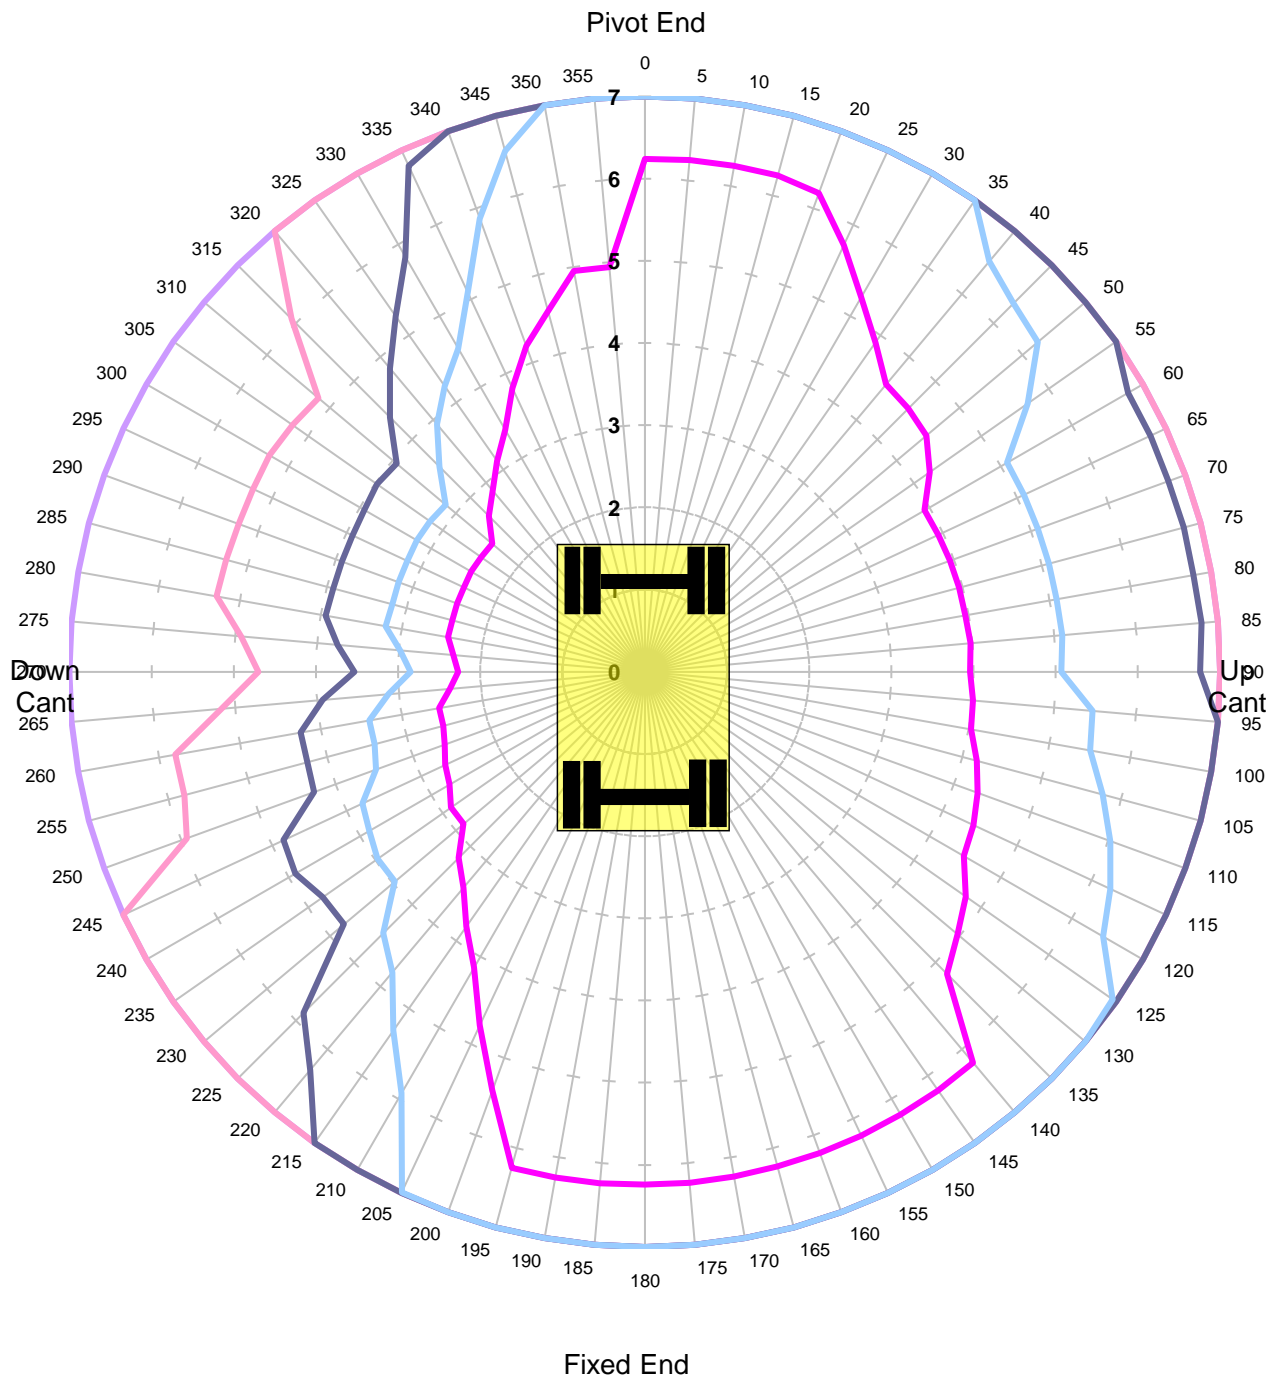


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift BP
Unlocked Road

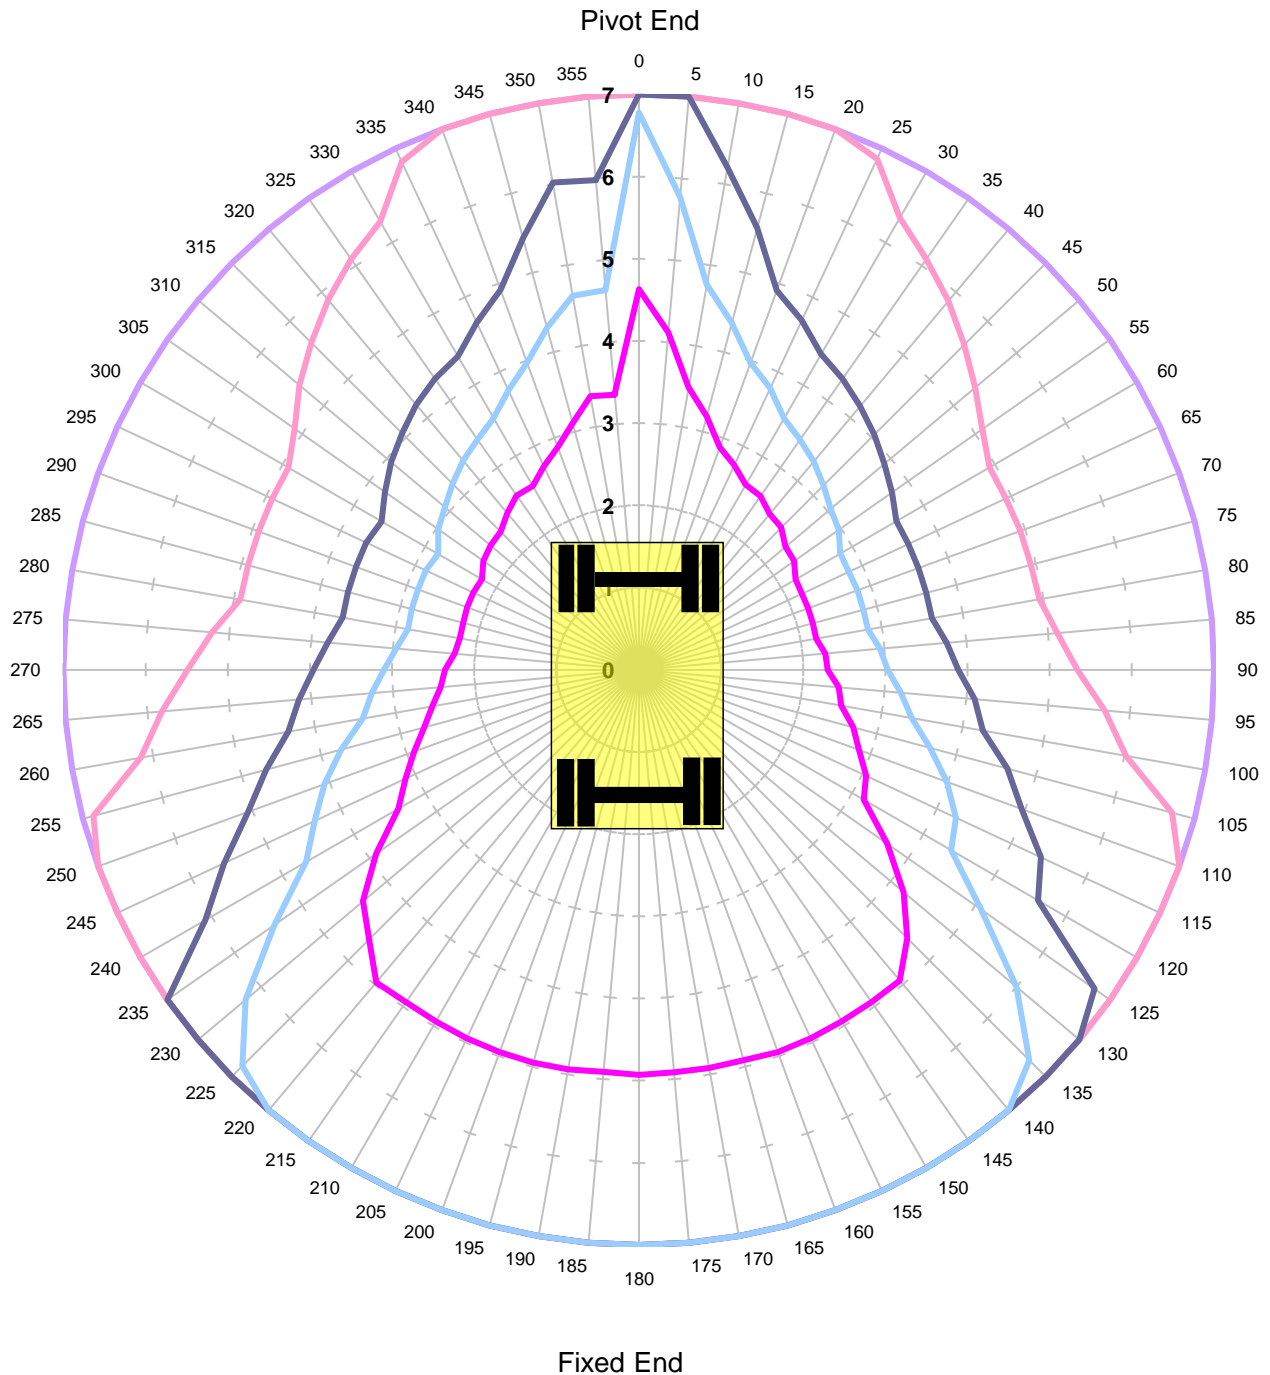


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	71.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift BP
Locked Road

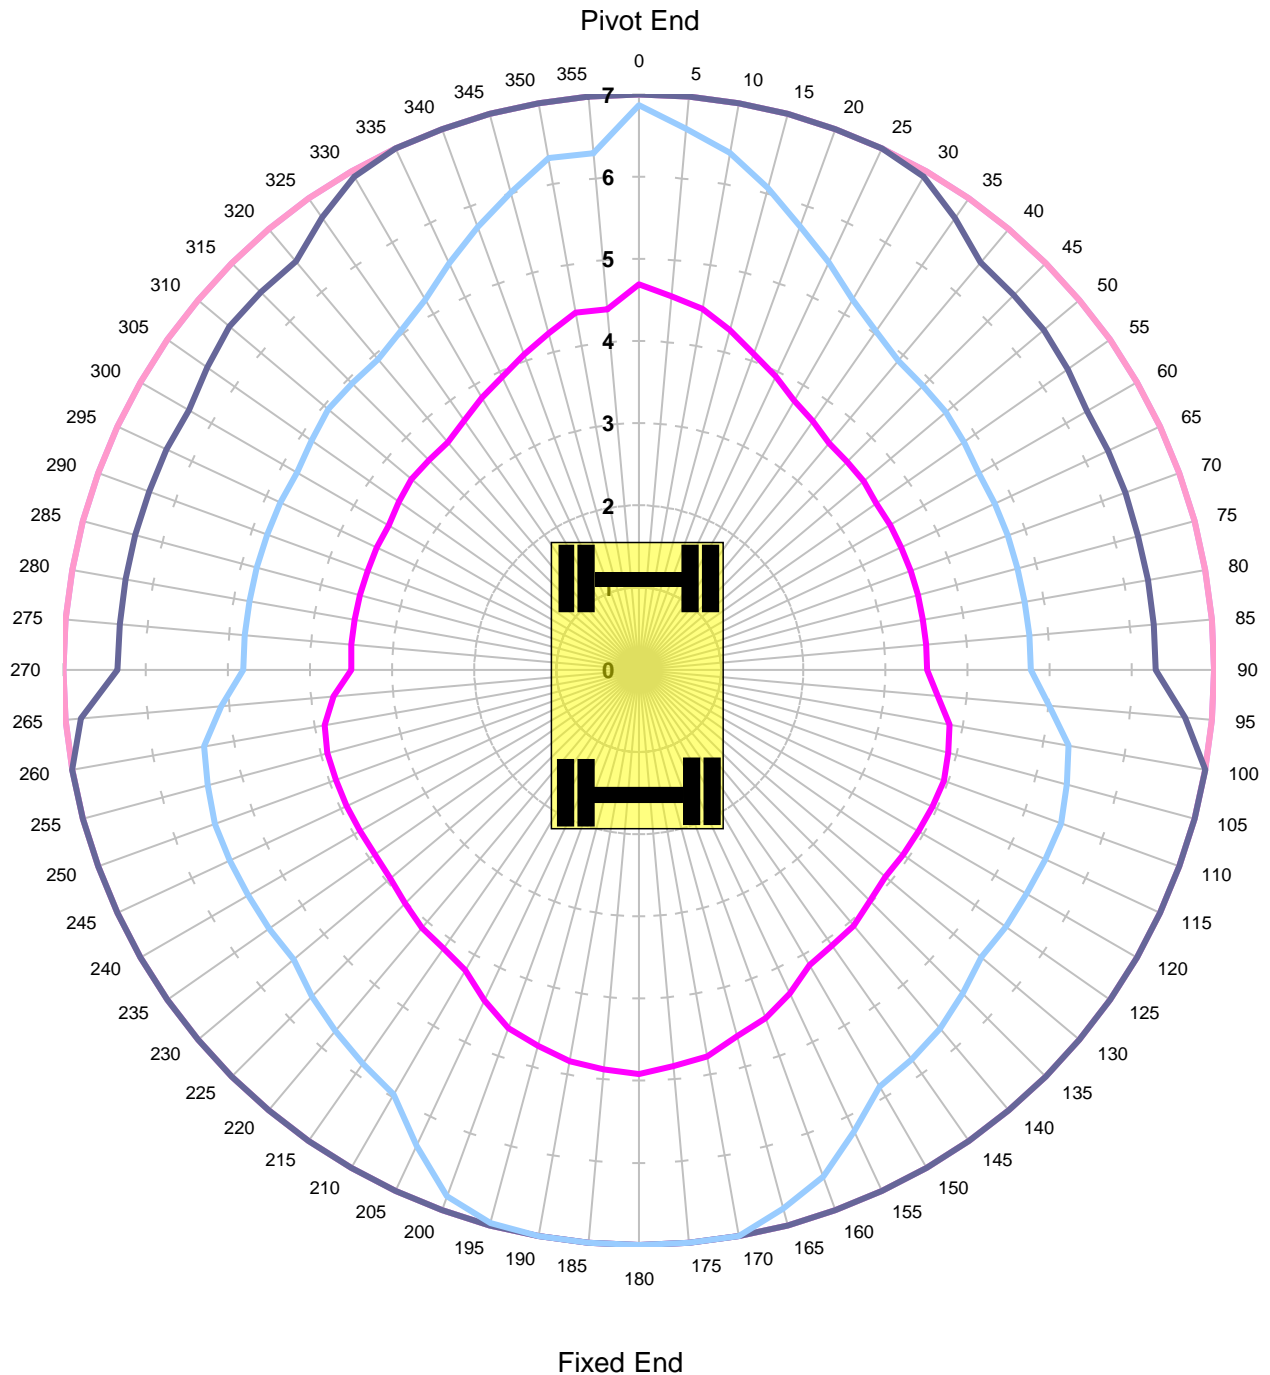

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	71.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant -150mm - Tandem Lift

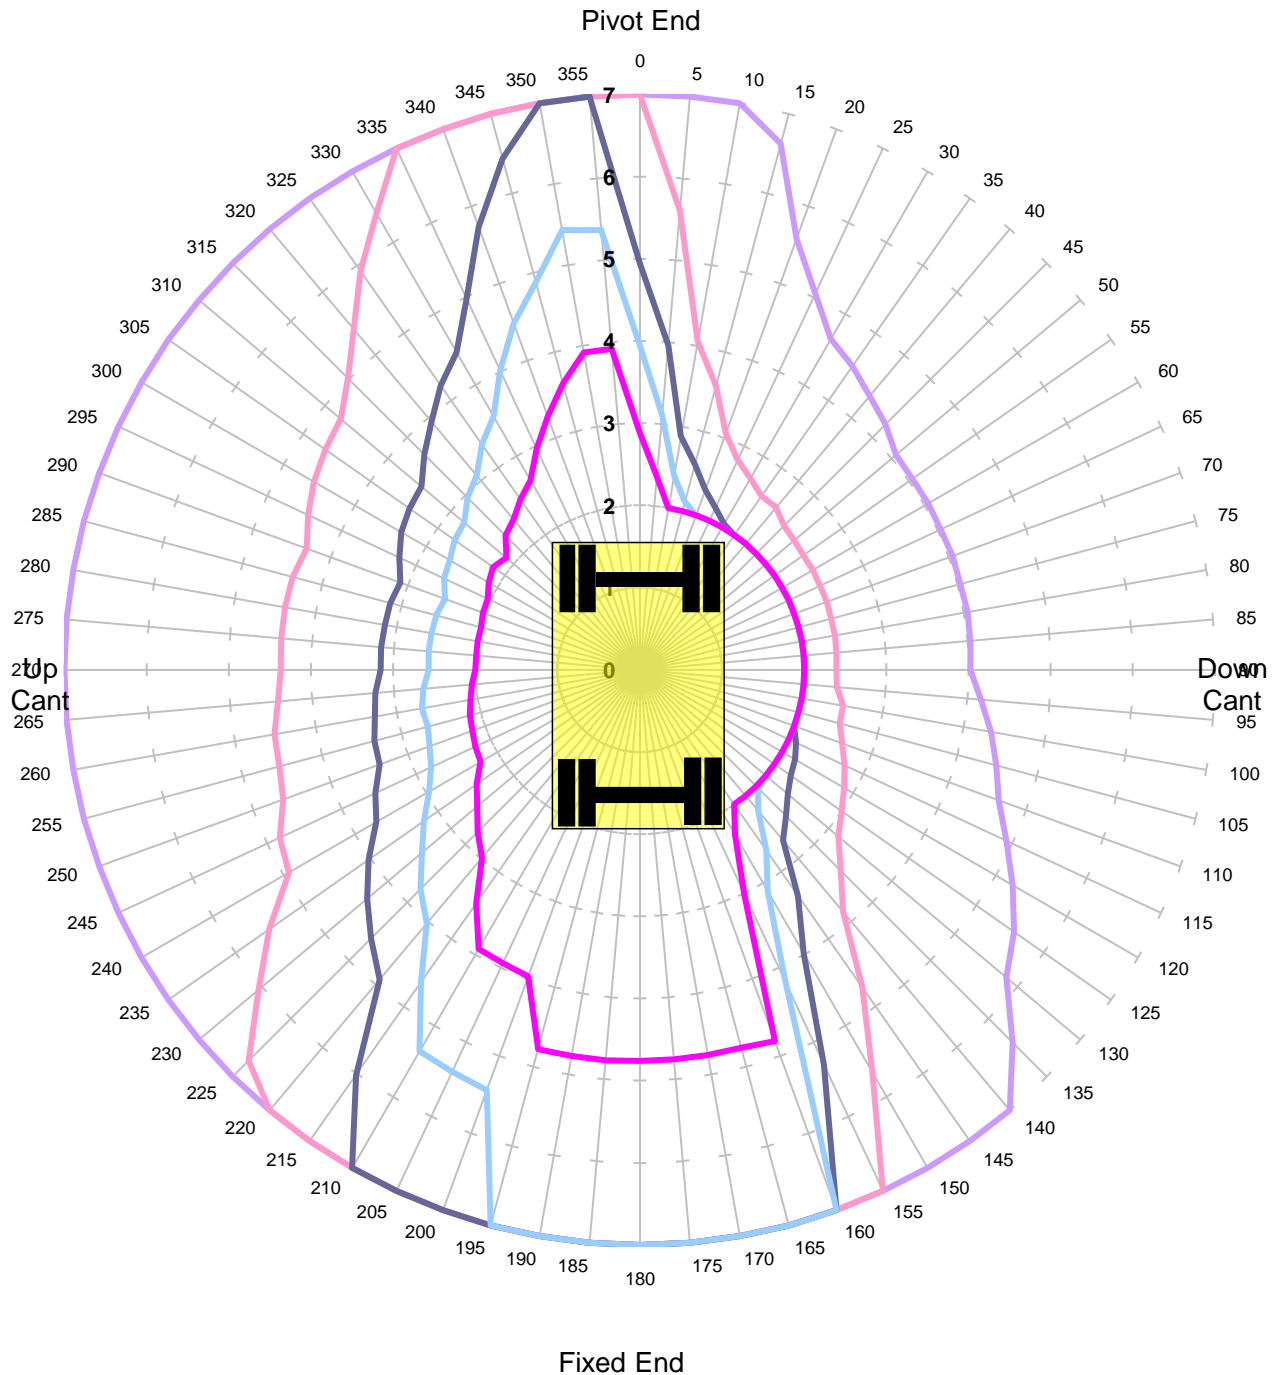


MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant -50mm - Tandem Lift

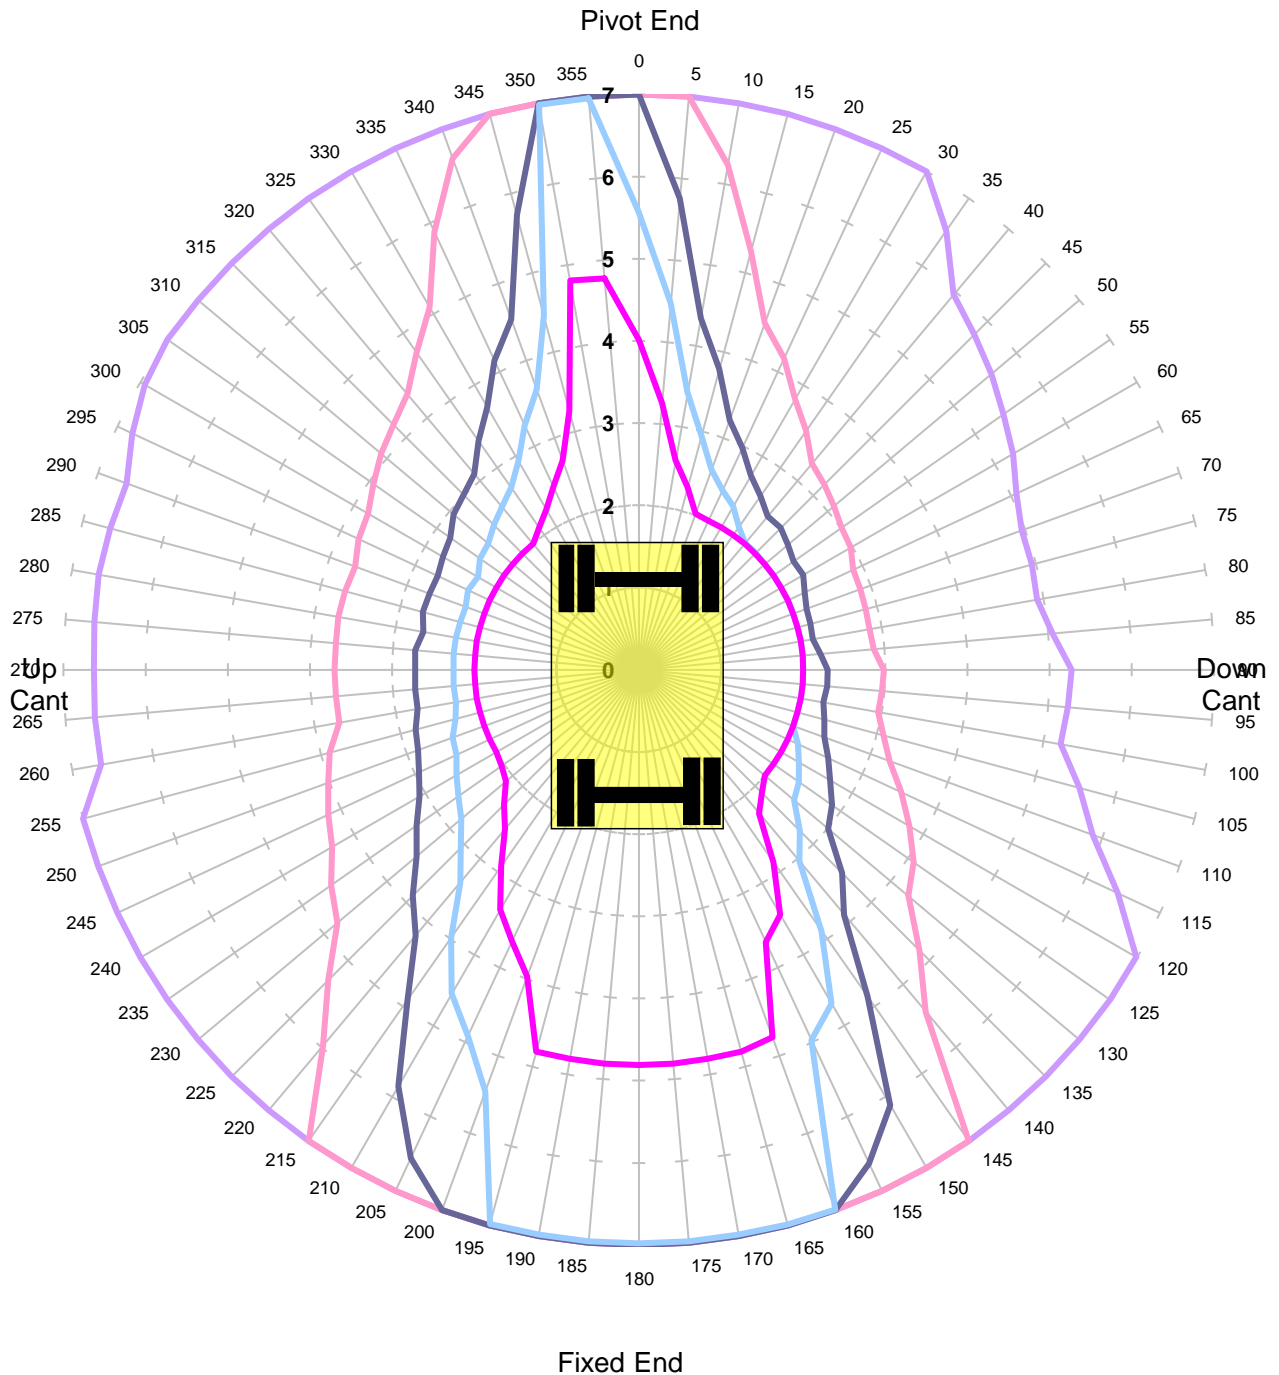

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant 50mm - Tandem Lift

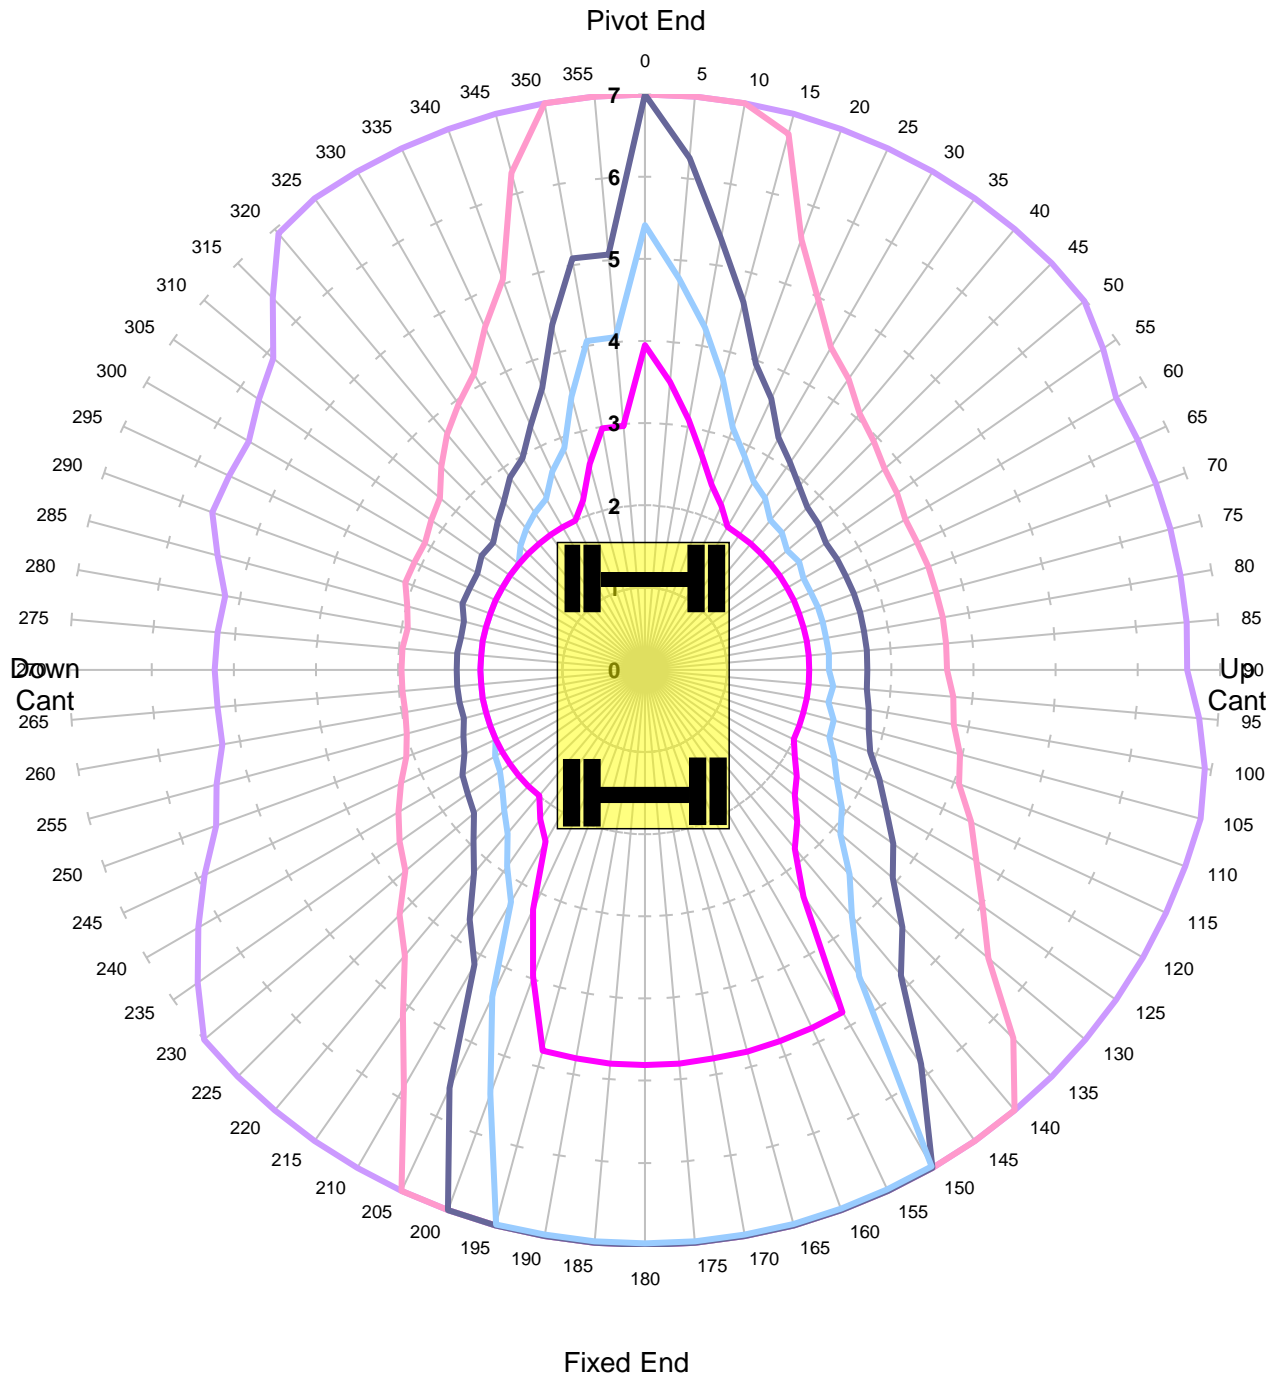

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Unlocked Rail Cant 150mm - Tandem Lift

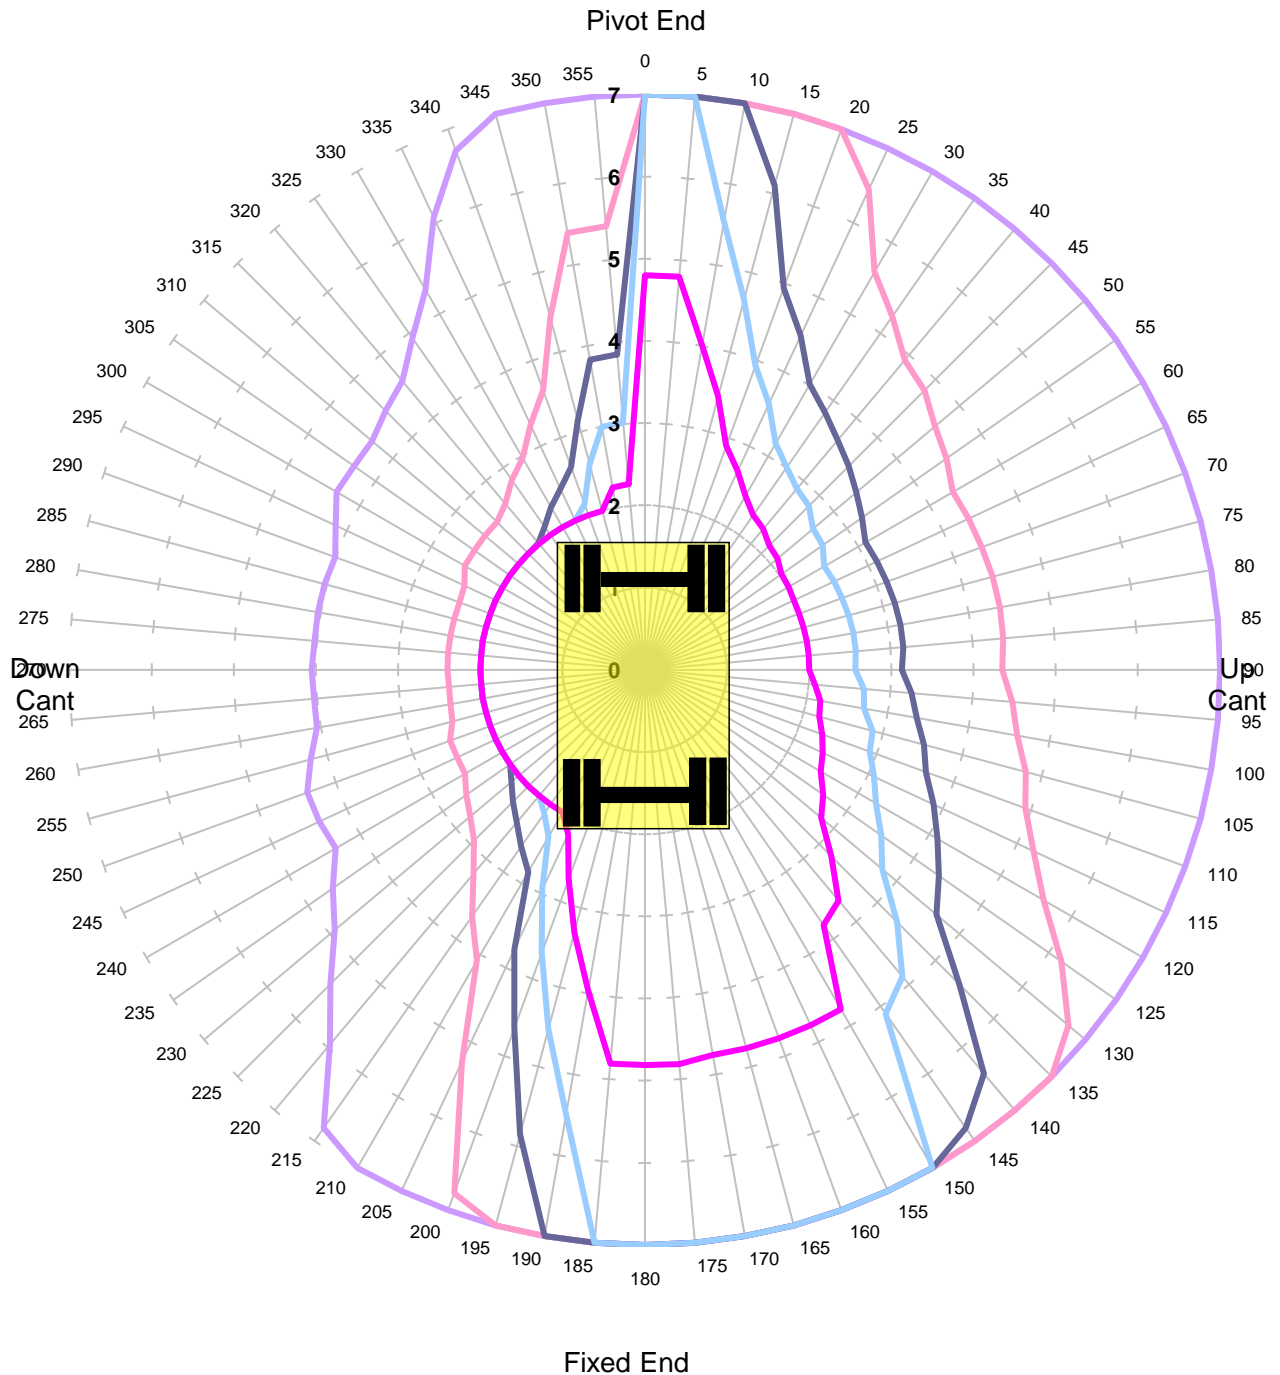

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant -150mm - Tandem Lift

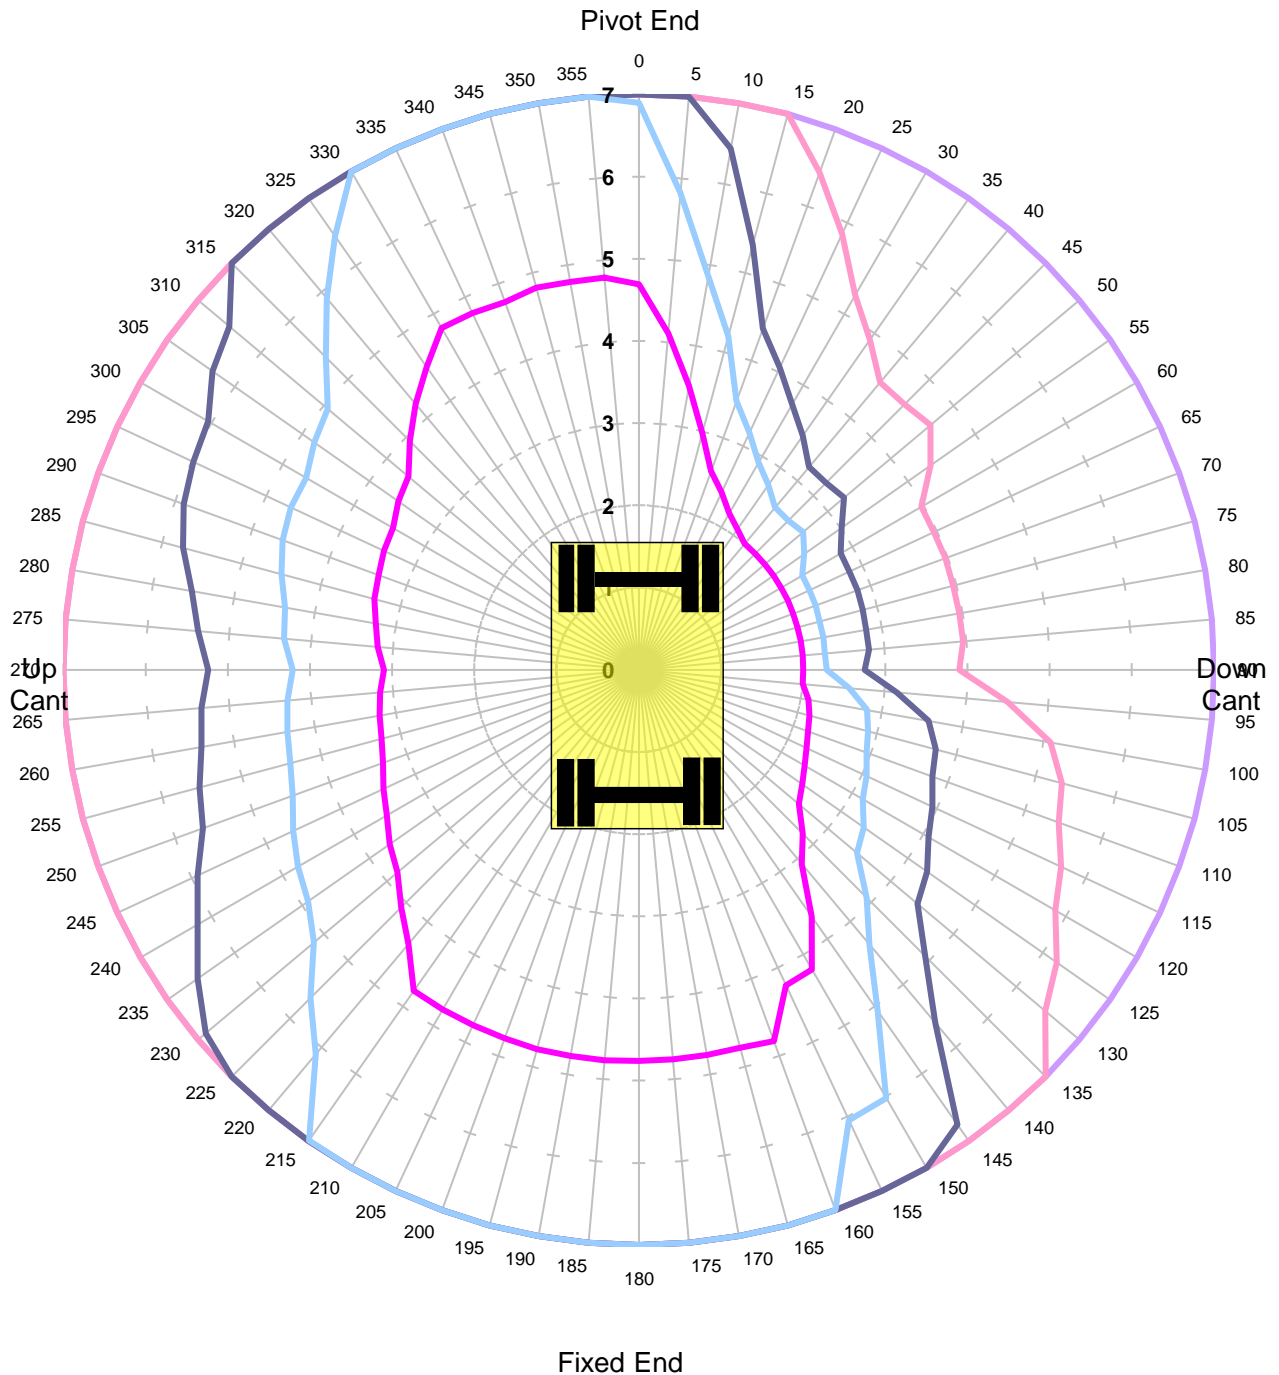


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924


**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant -50mm - Tandem Lift**

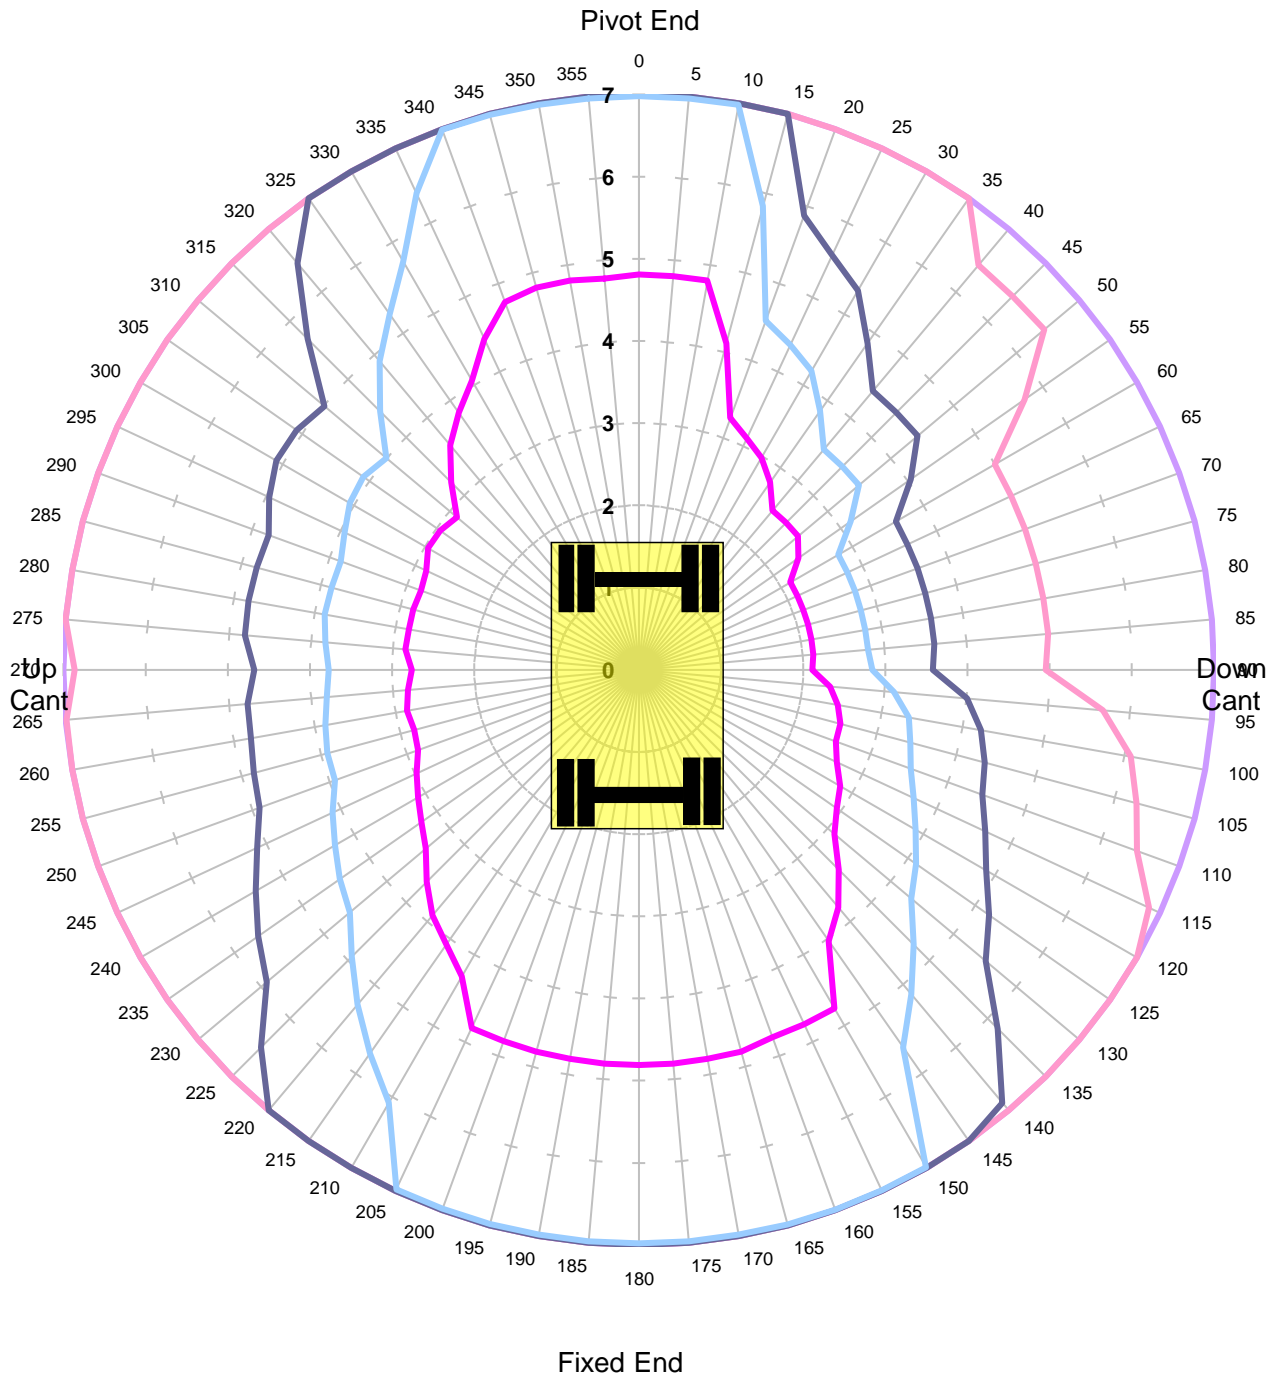

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP
Locked Rail Cant 50mm - Tandem Lift**

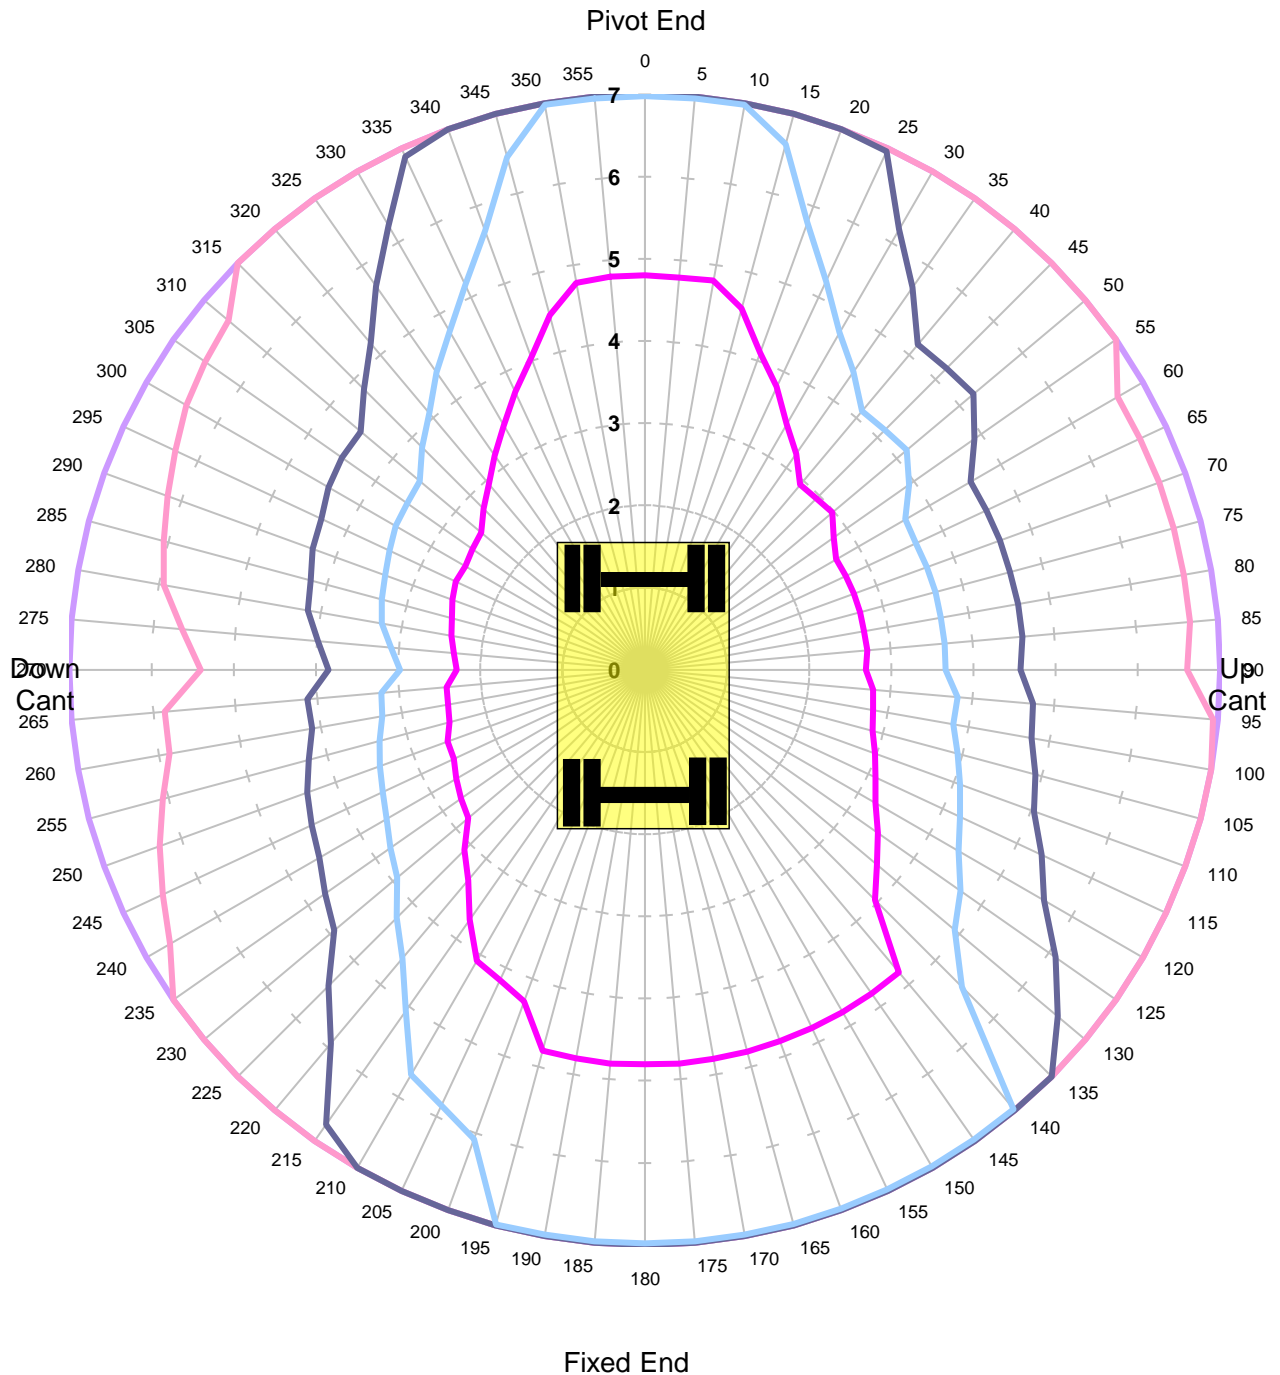

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift BP**

Locked Rail Cant 150mm - Tandem Lift

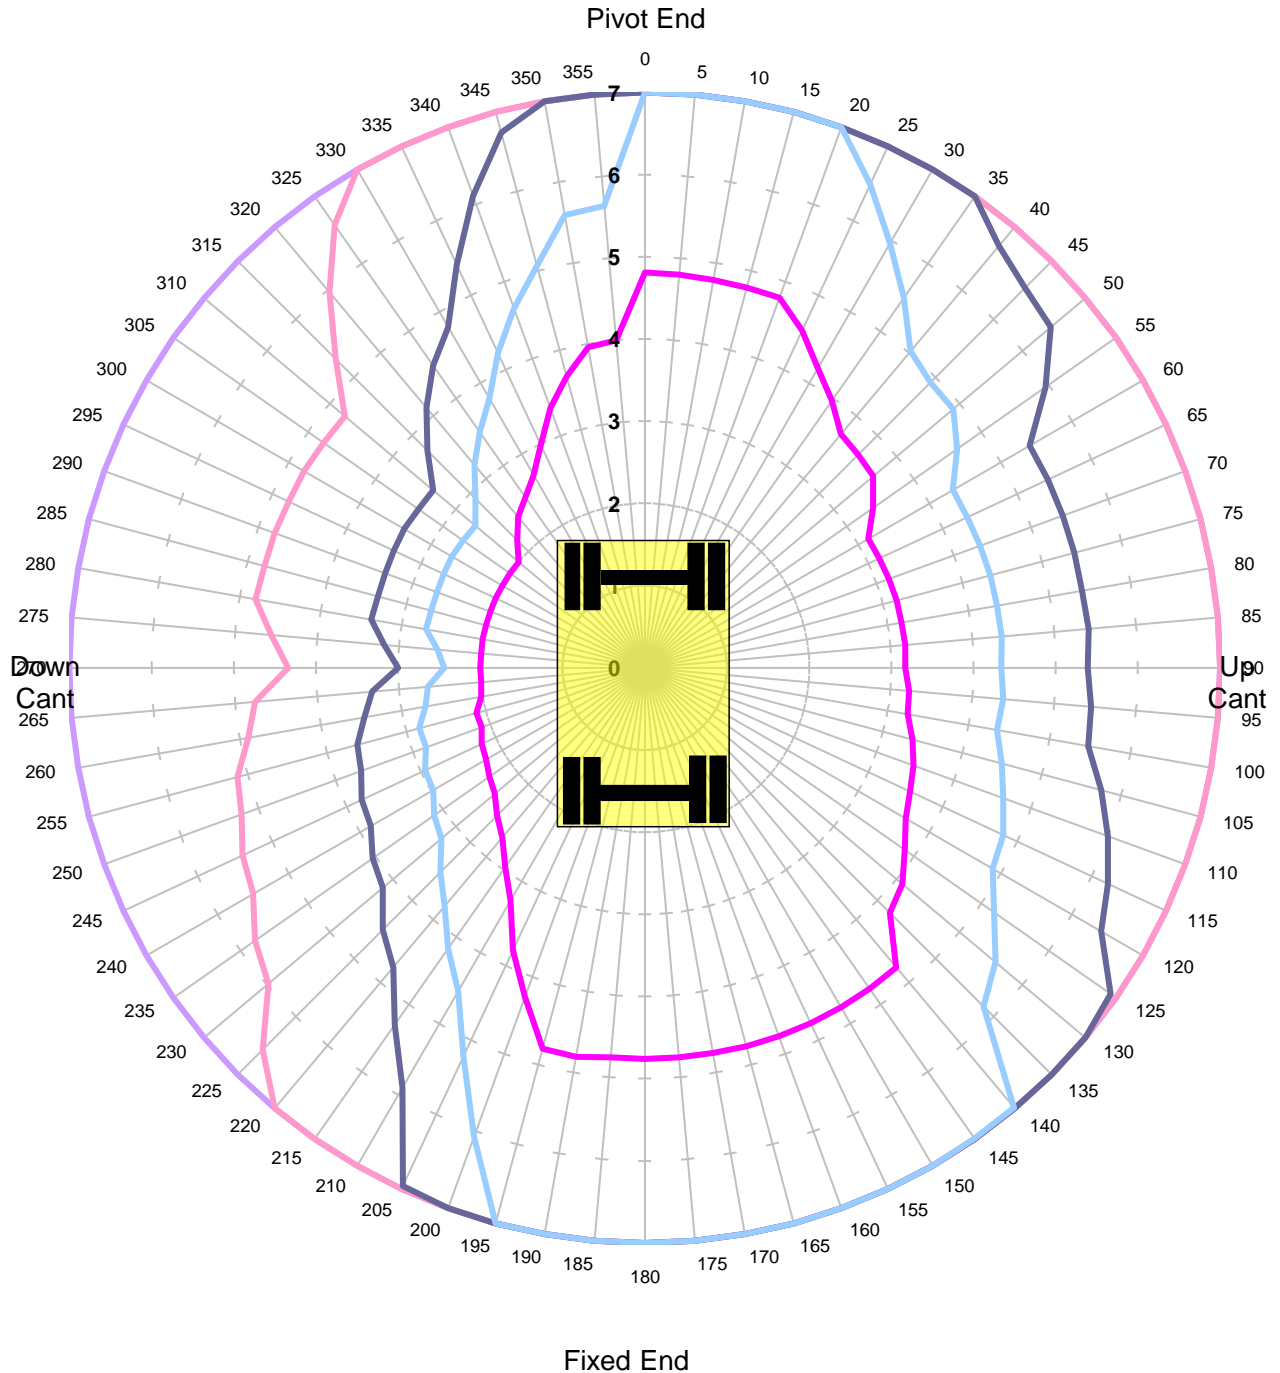


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift BP
Unlocked Road - Tandem Lift**

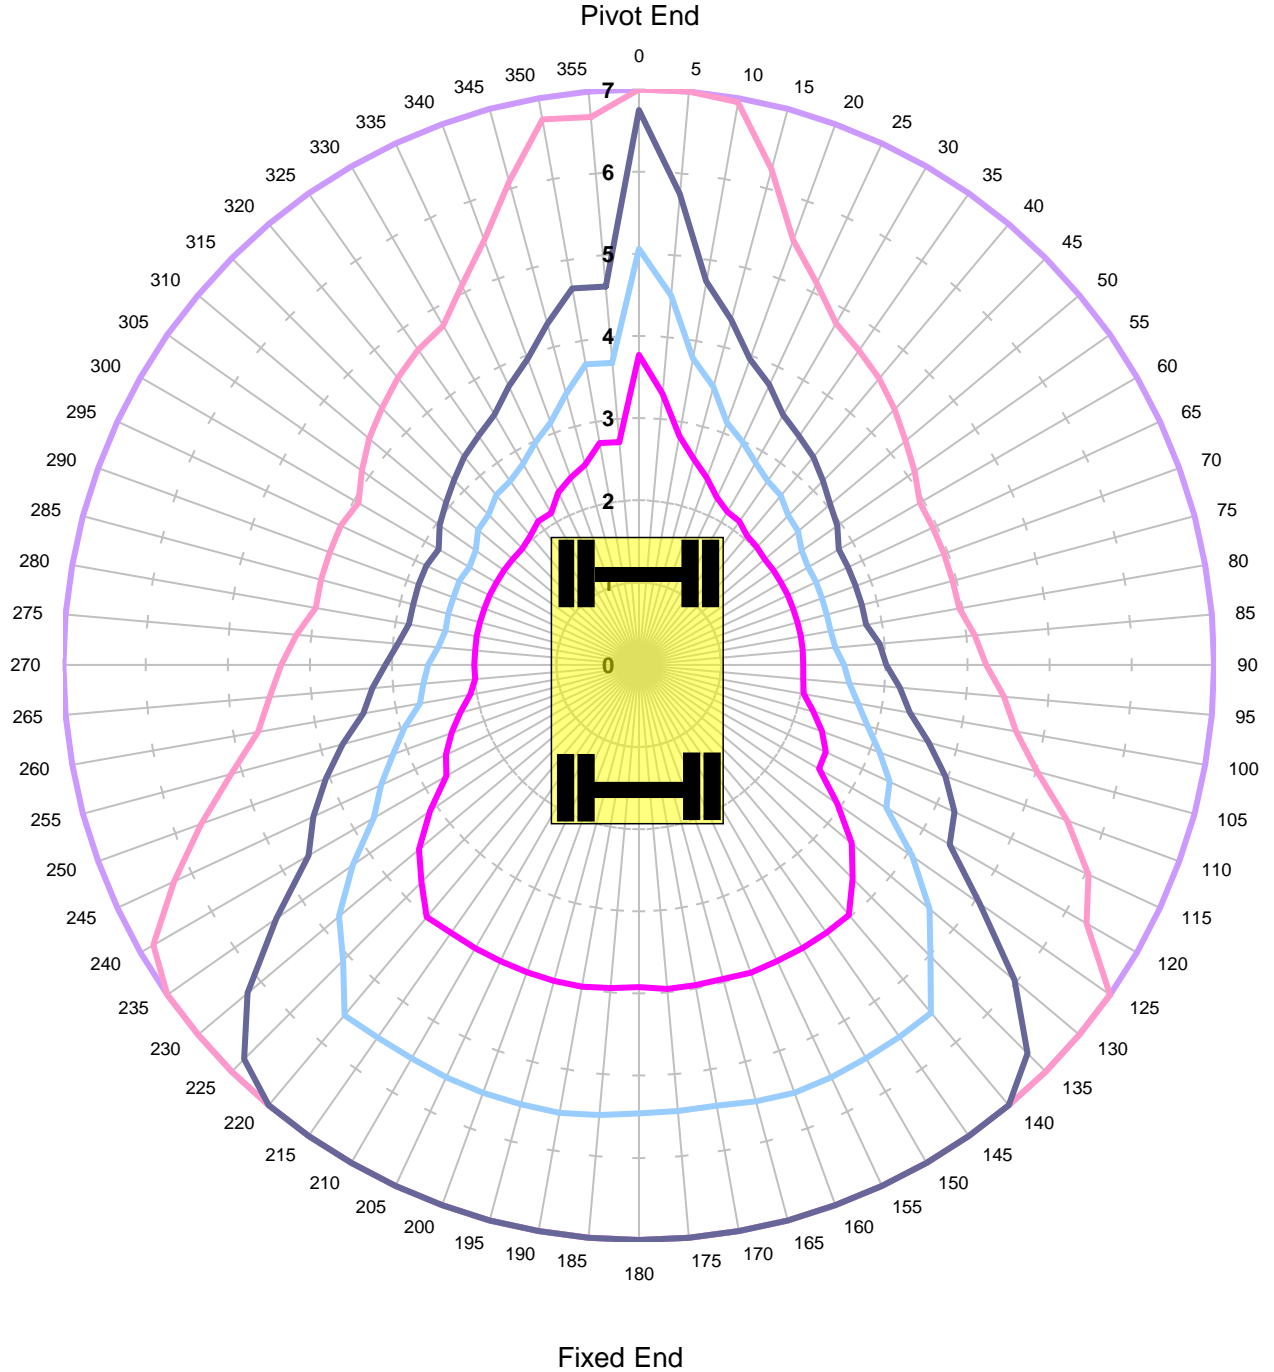

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	47.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift BP**

Locked Road - Tandem Lift

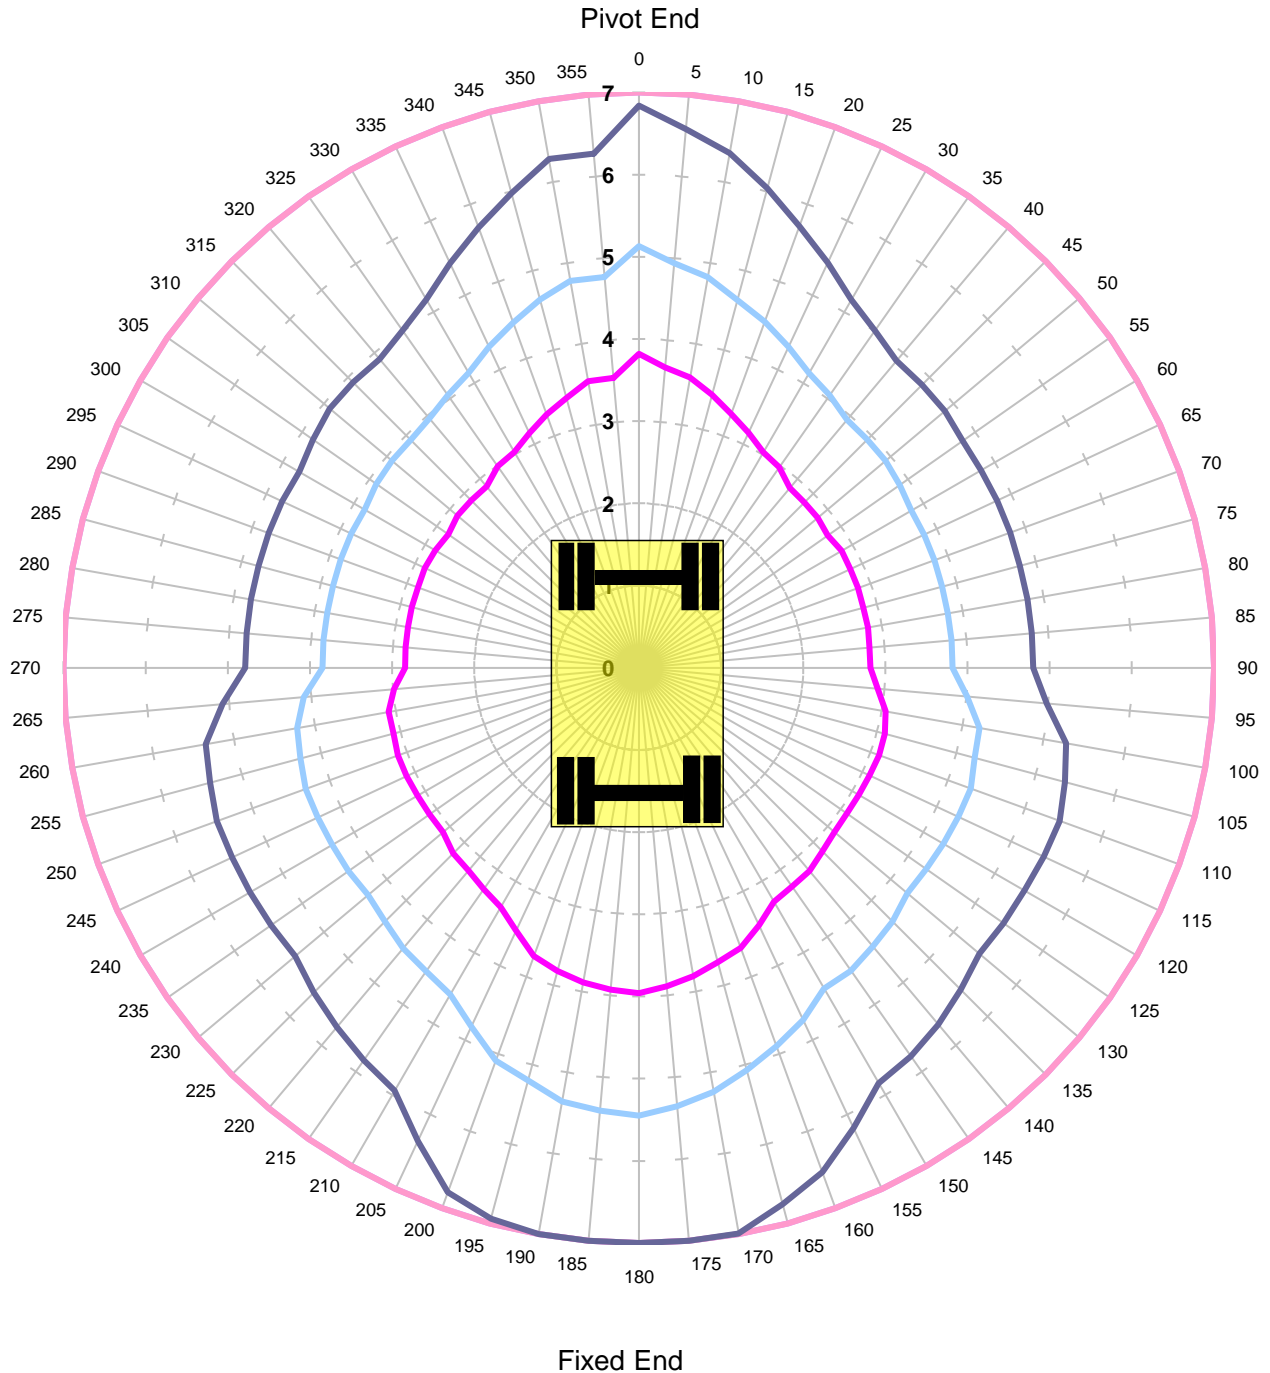

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	47.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant -150mm

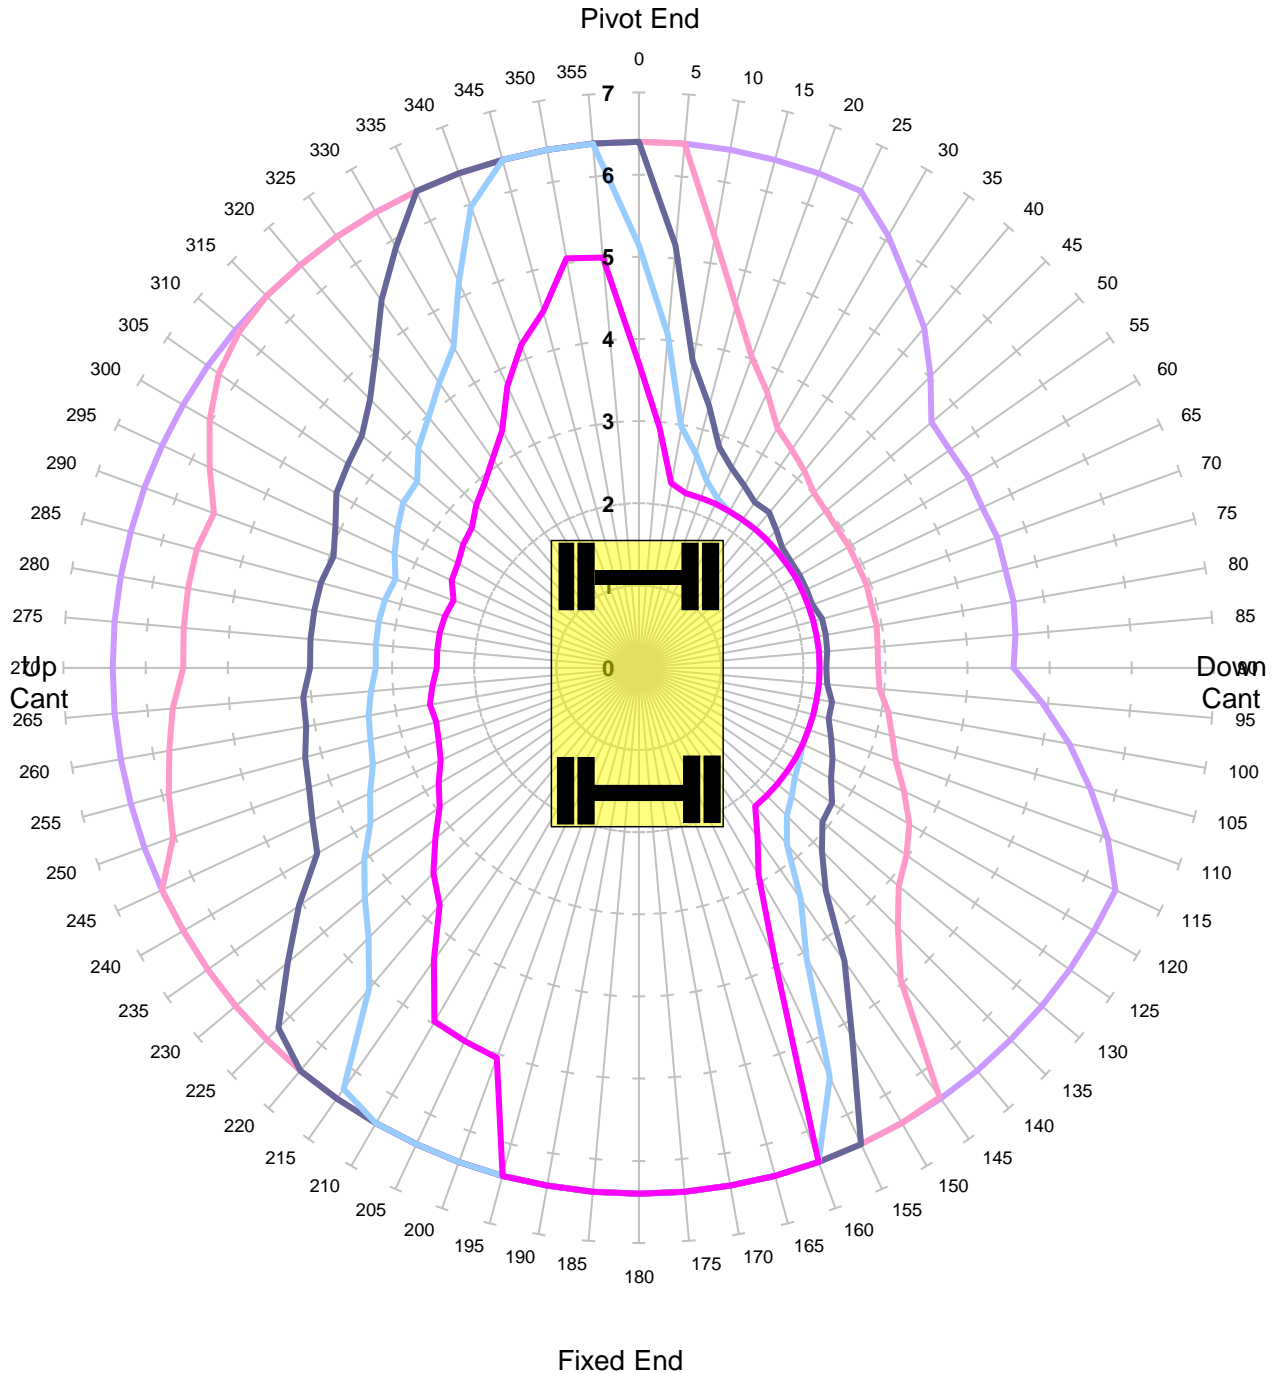

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant -50mm

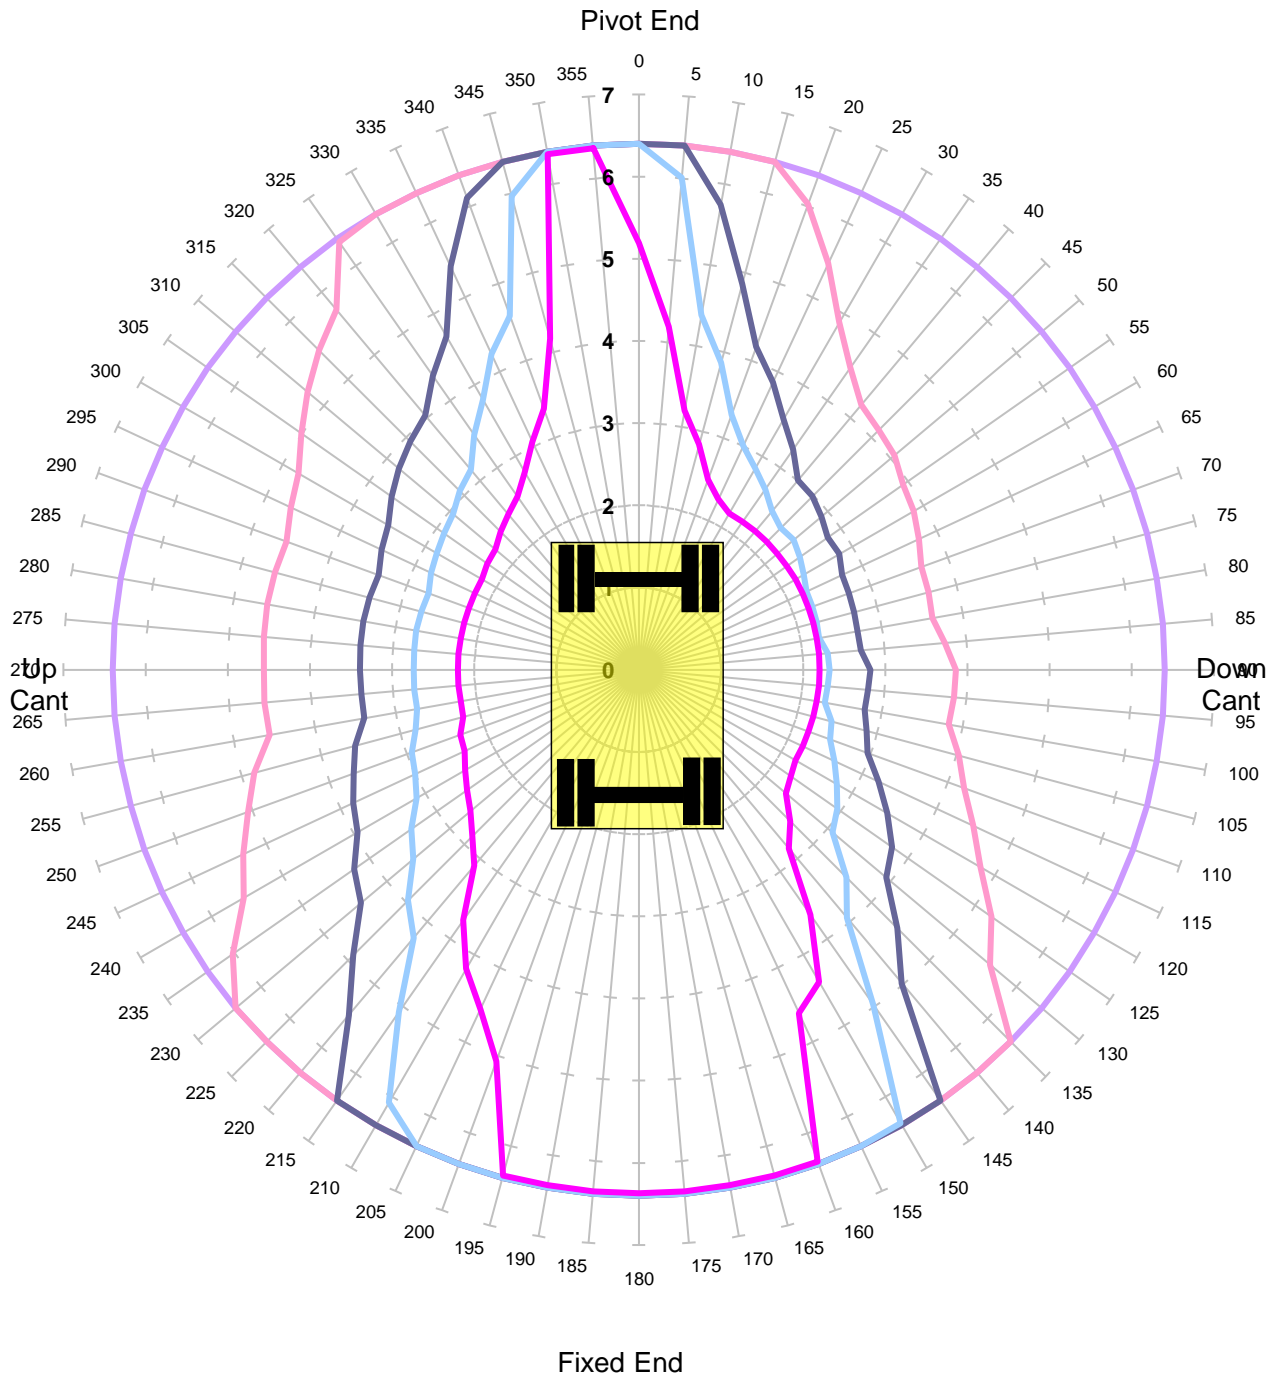

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant 50mm

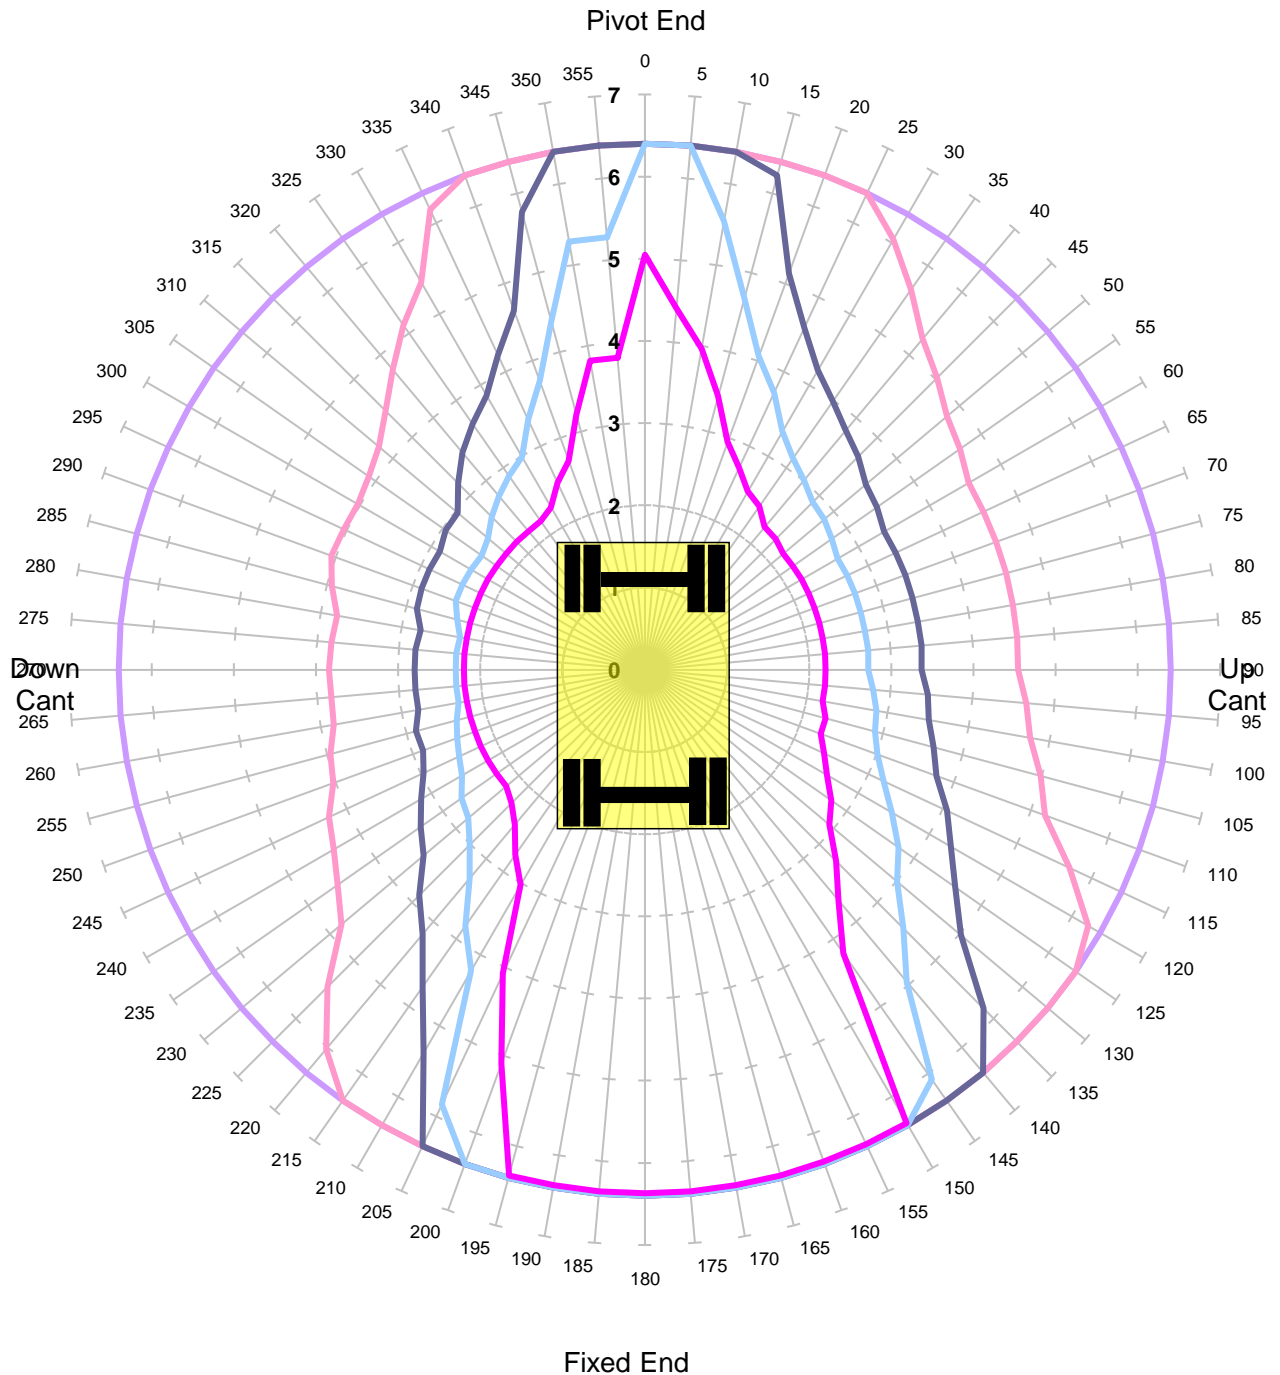

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Unlocked Rail Cant 150mm

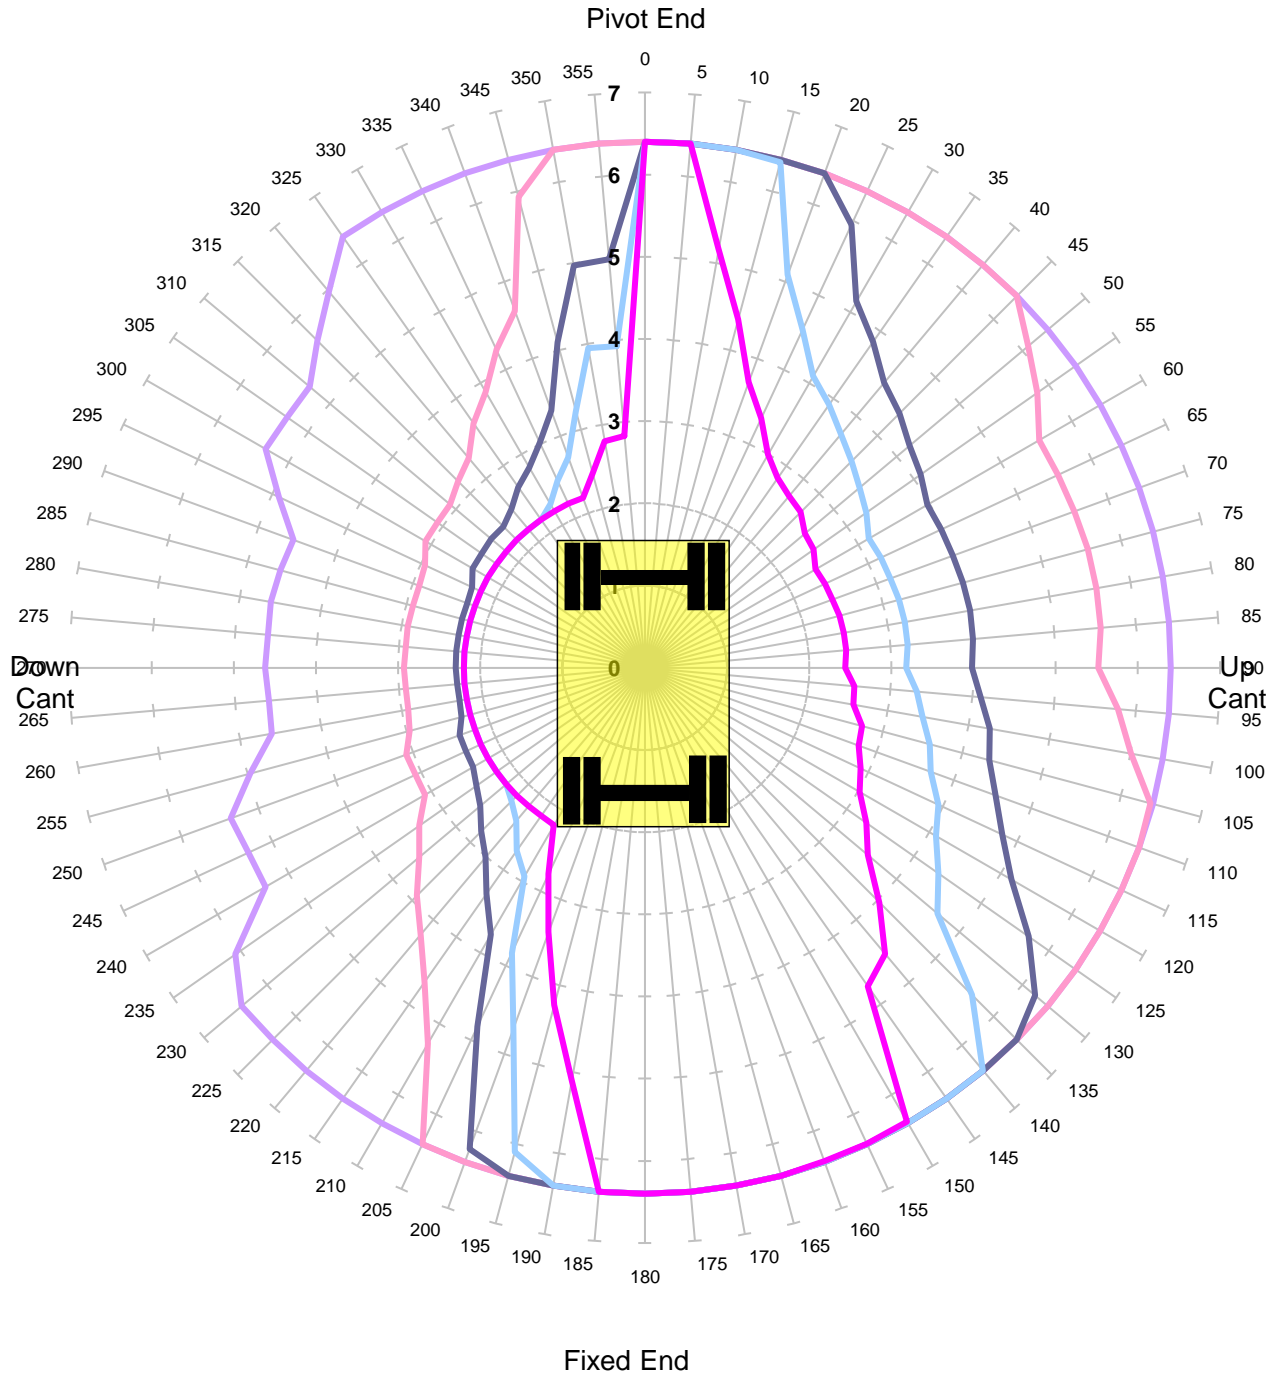

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	67.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Locked Rail Cant -150mm

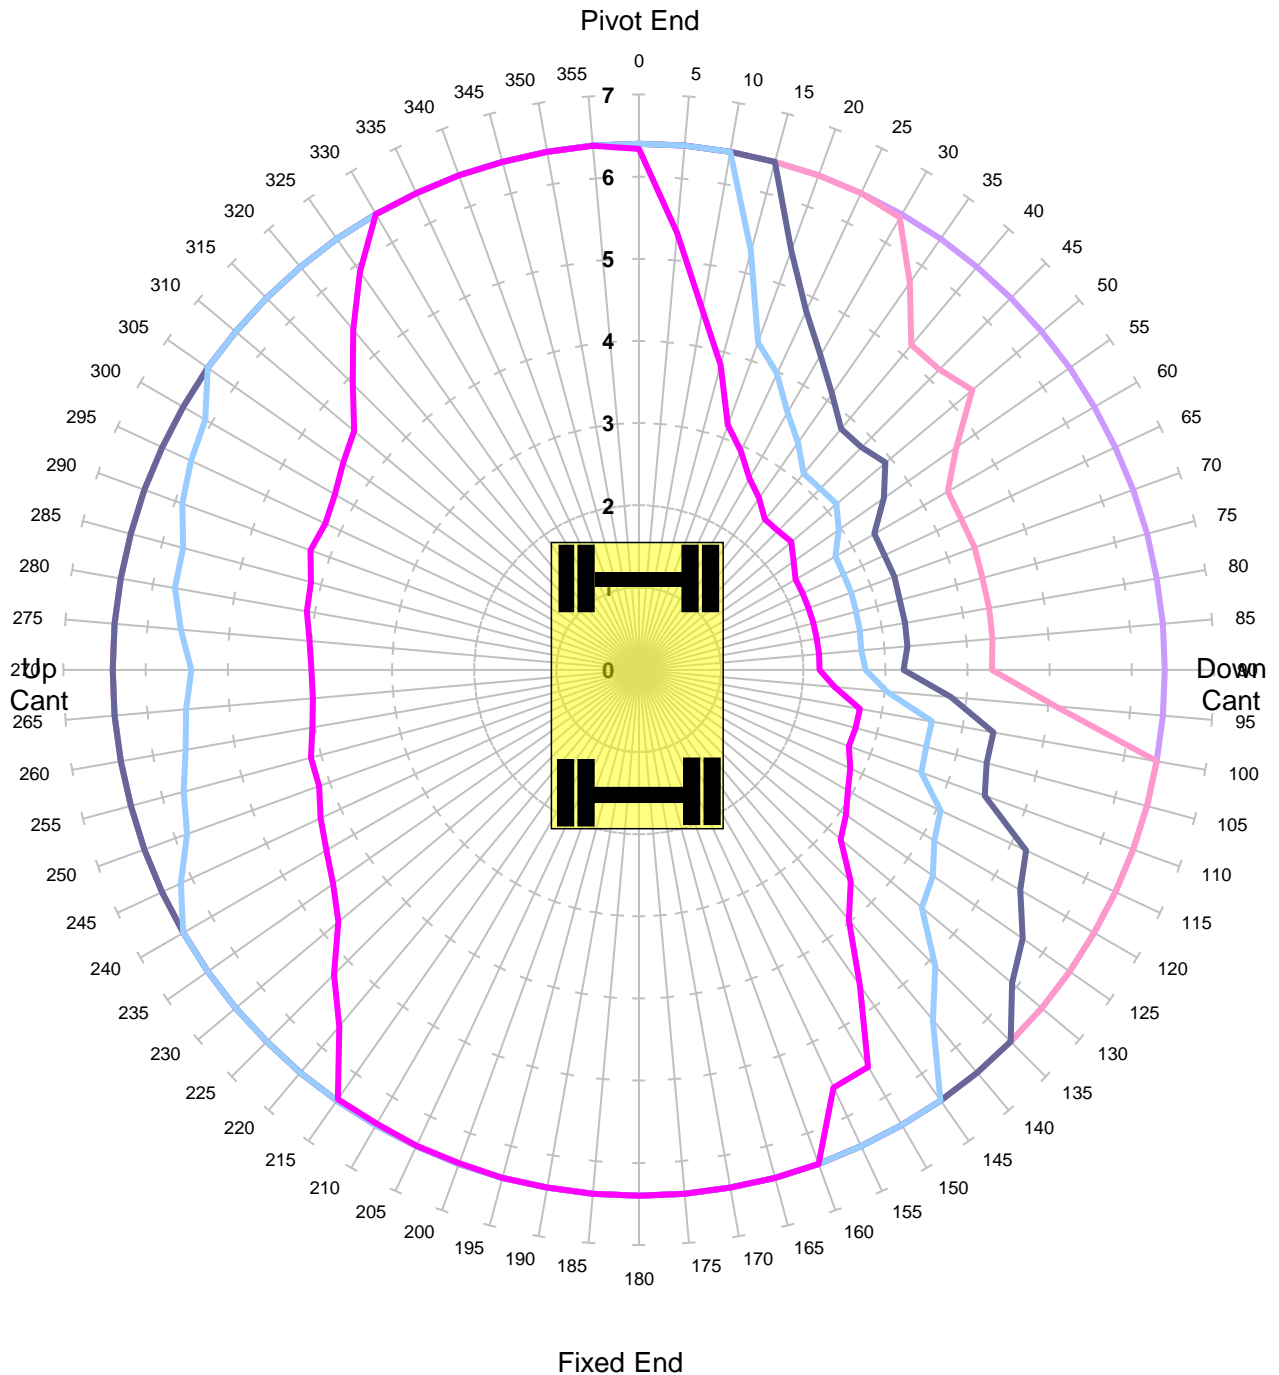

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Locked Rail Cant -50mm

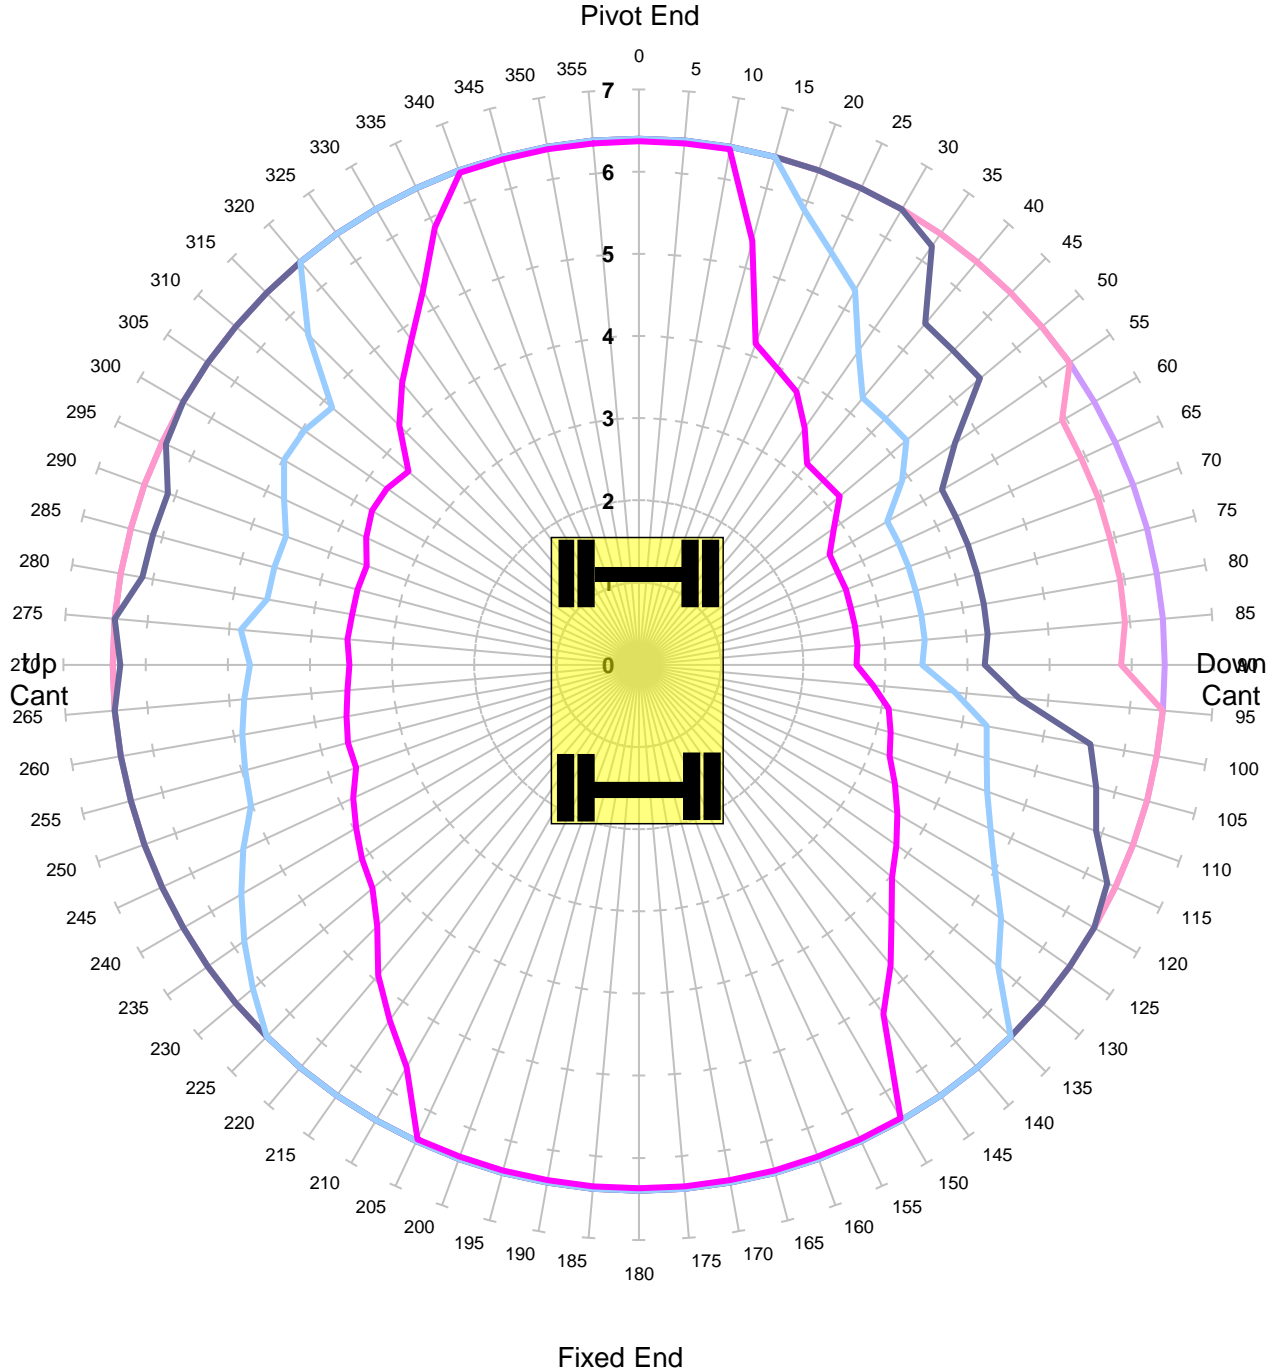

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Locked Rail Cant 50mm

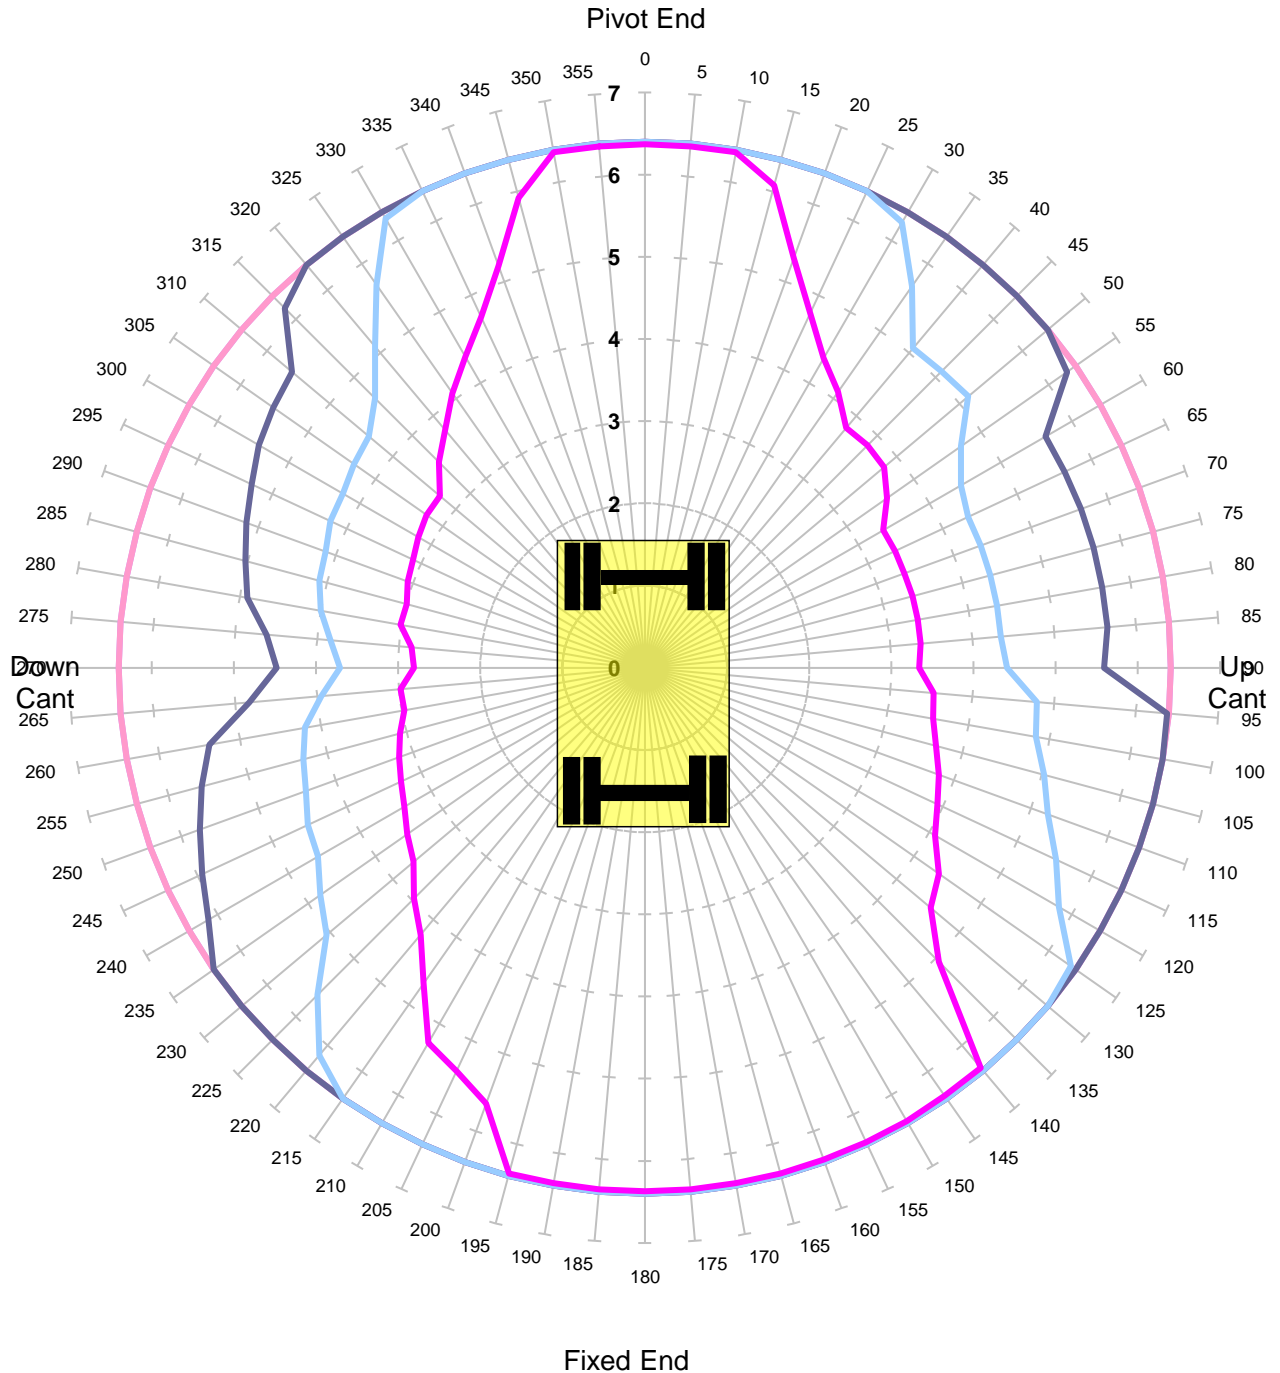

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**

Locked Rail Cant 150mm

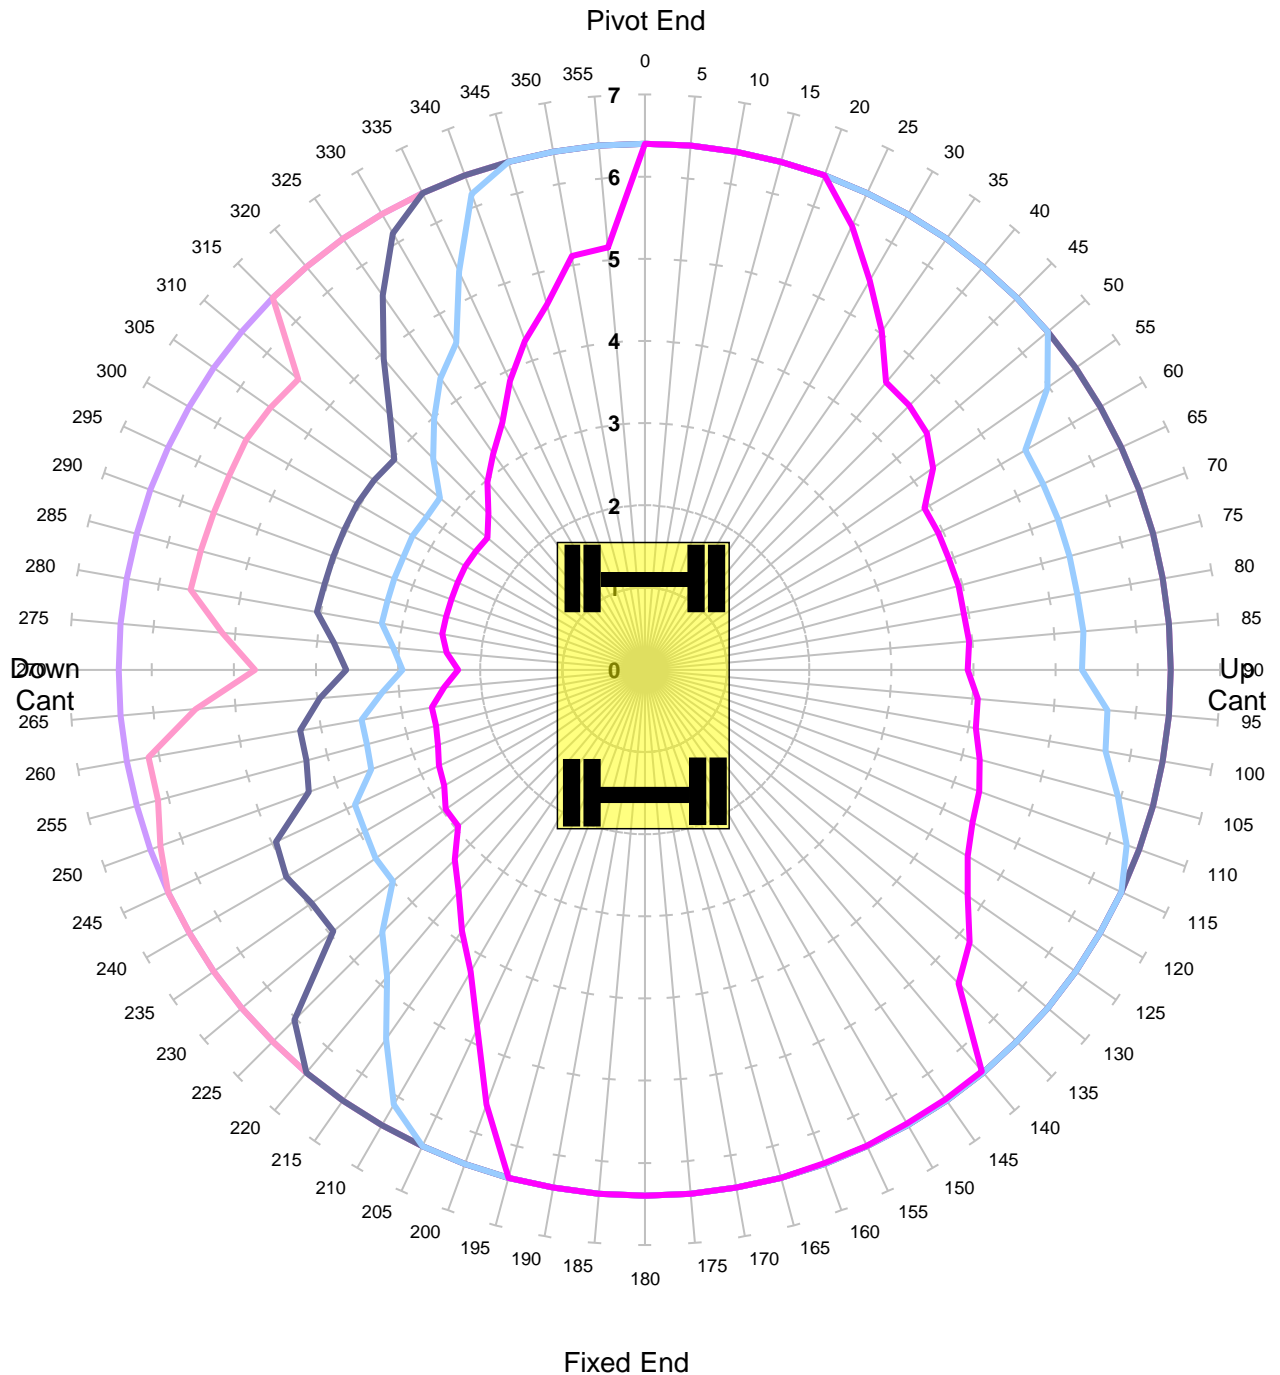


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	90.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift ALP1
Unlocked Road

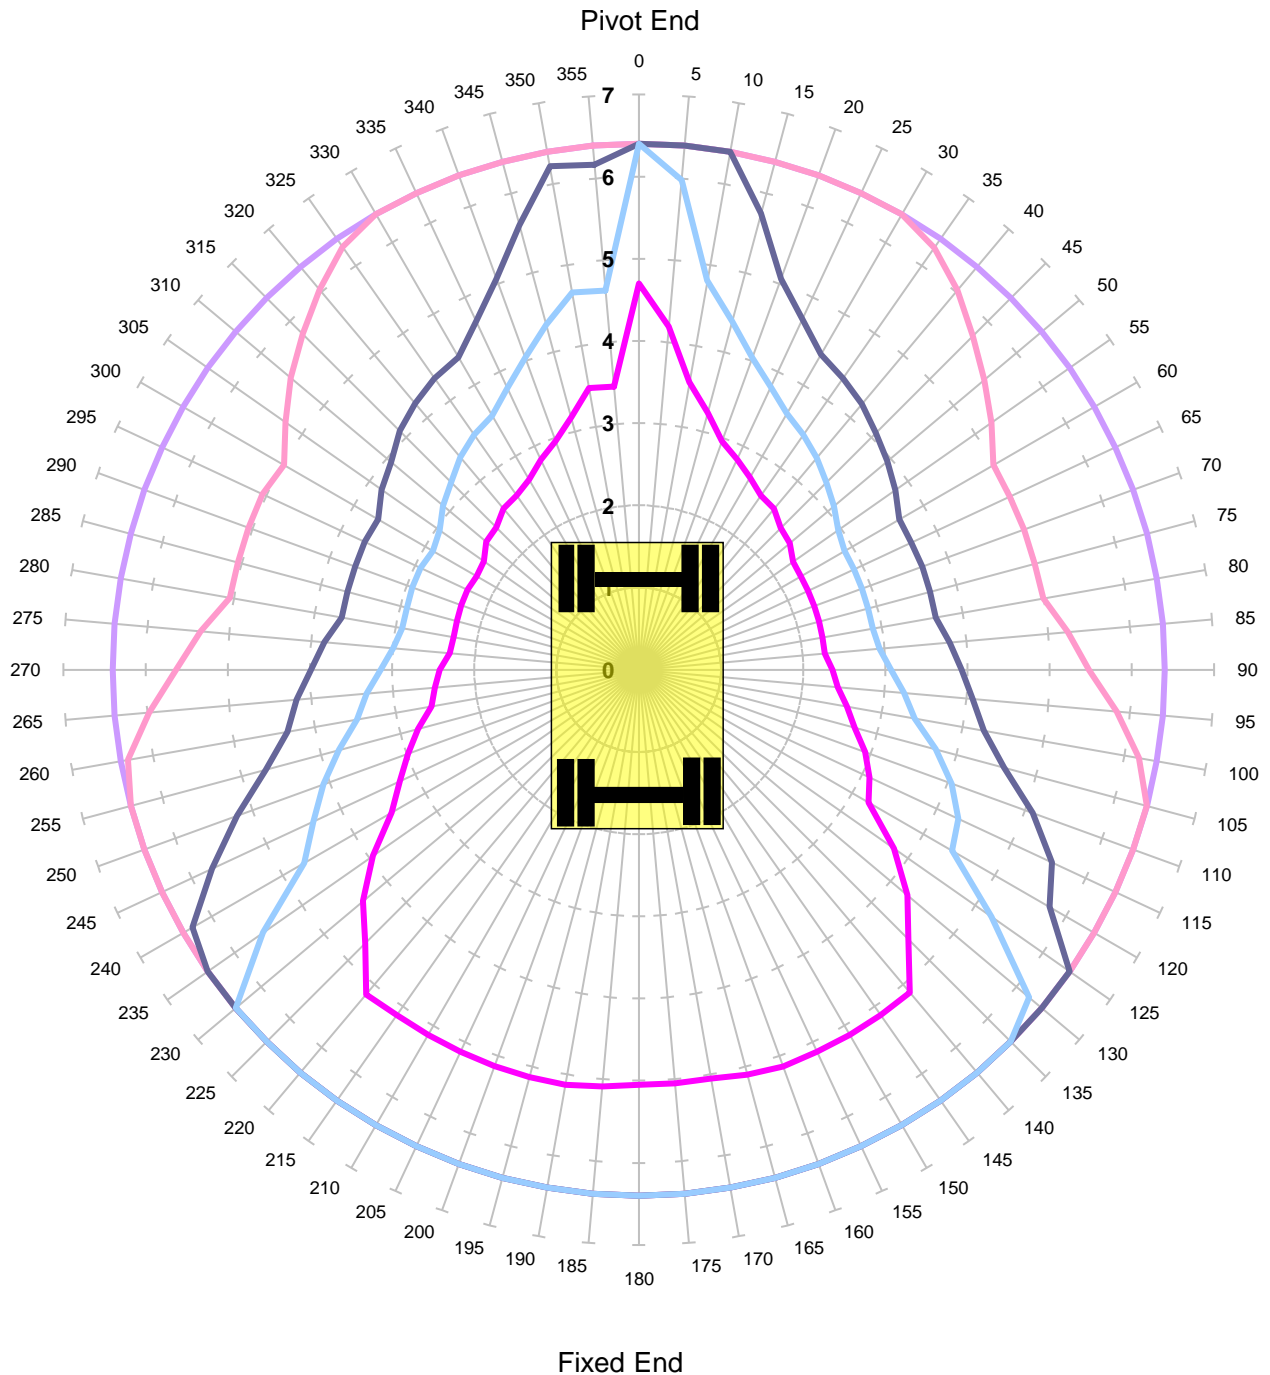


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	71.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift ALP1
Locked Road

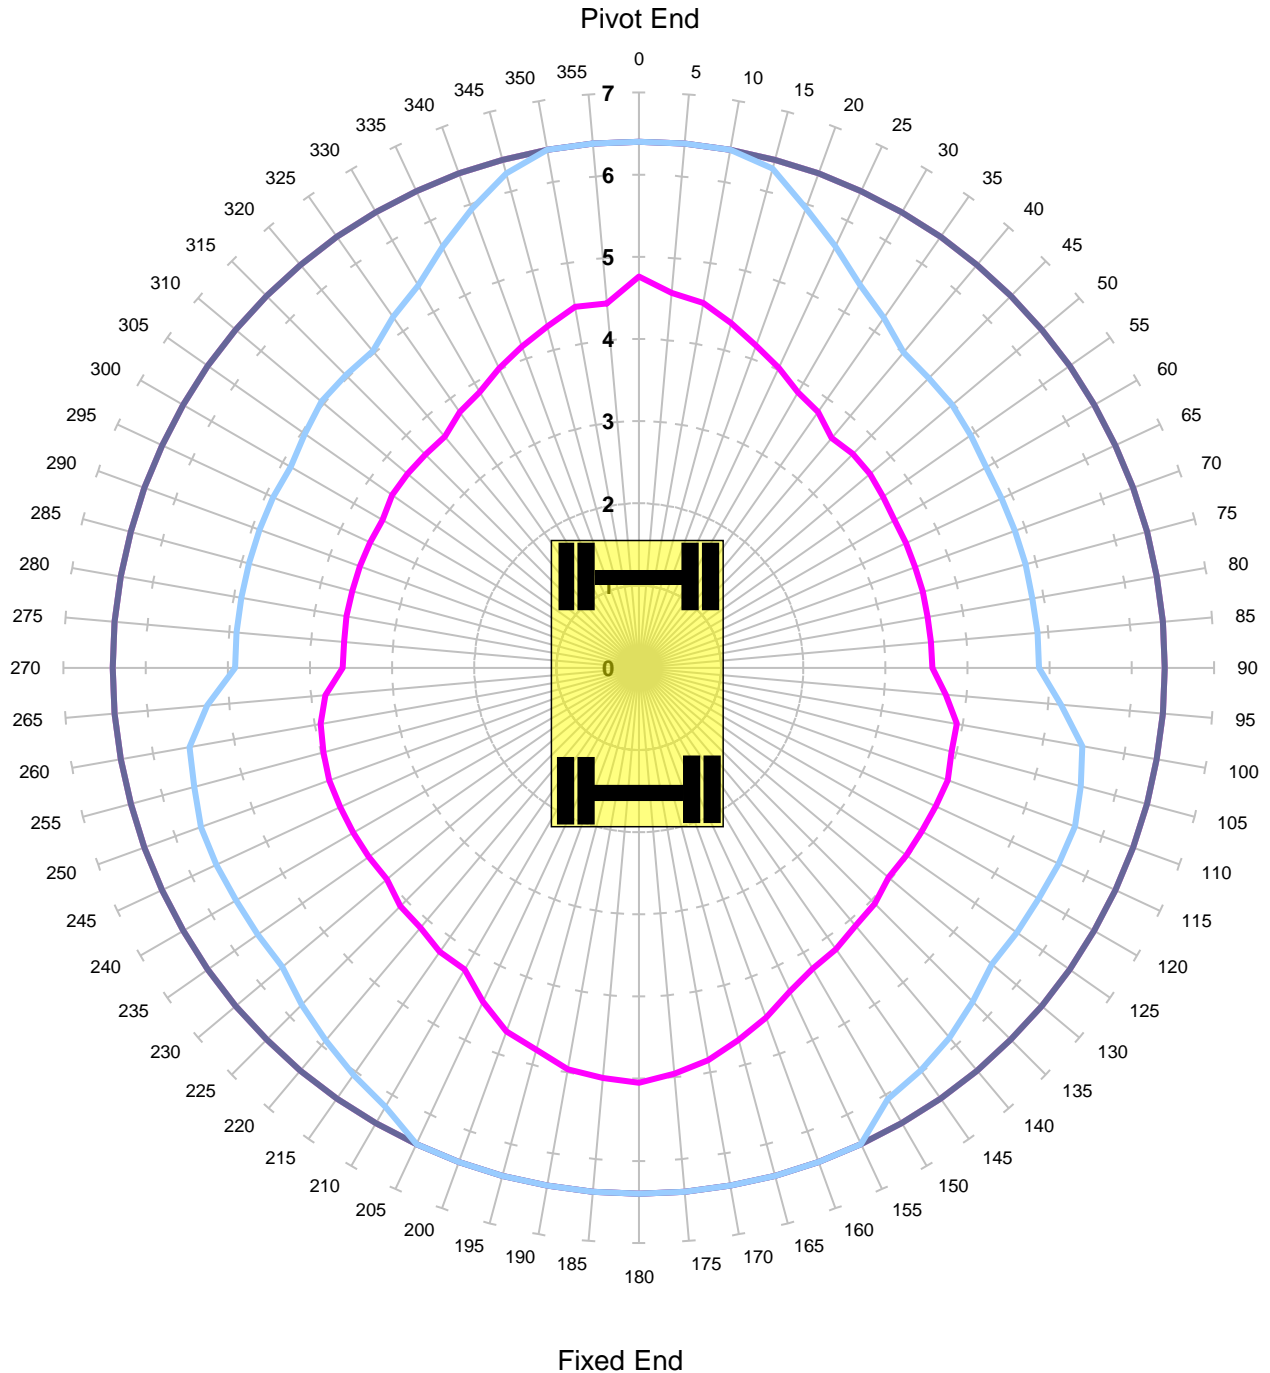

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	71.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1**


Unlocked Rail Cant -150mm - Tandem Lift

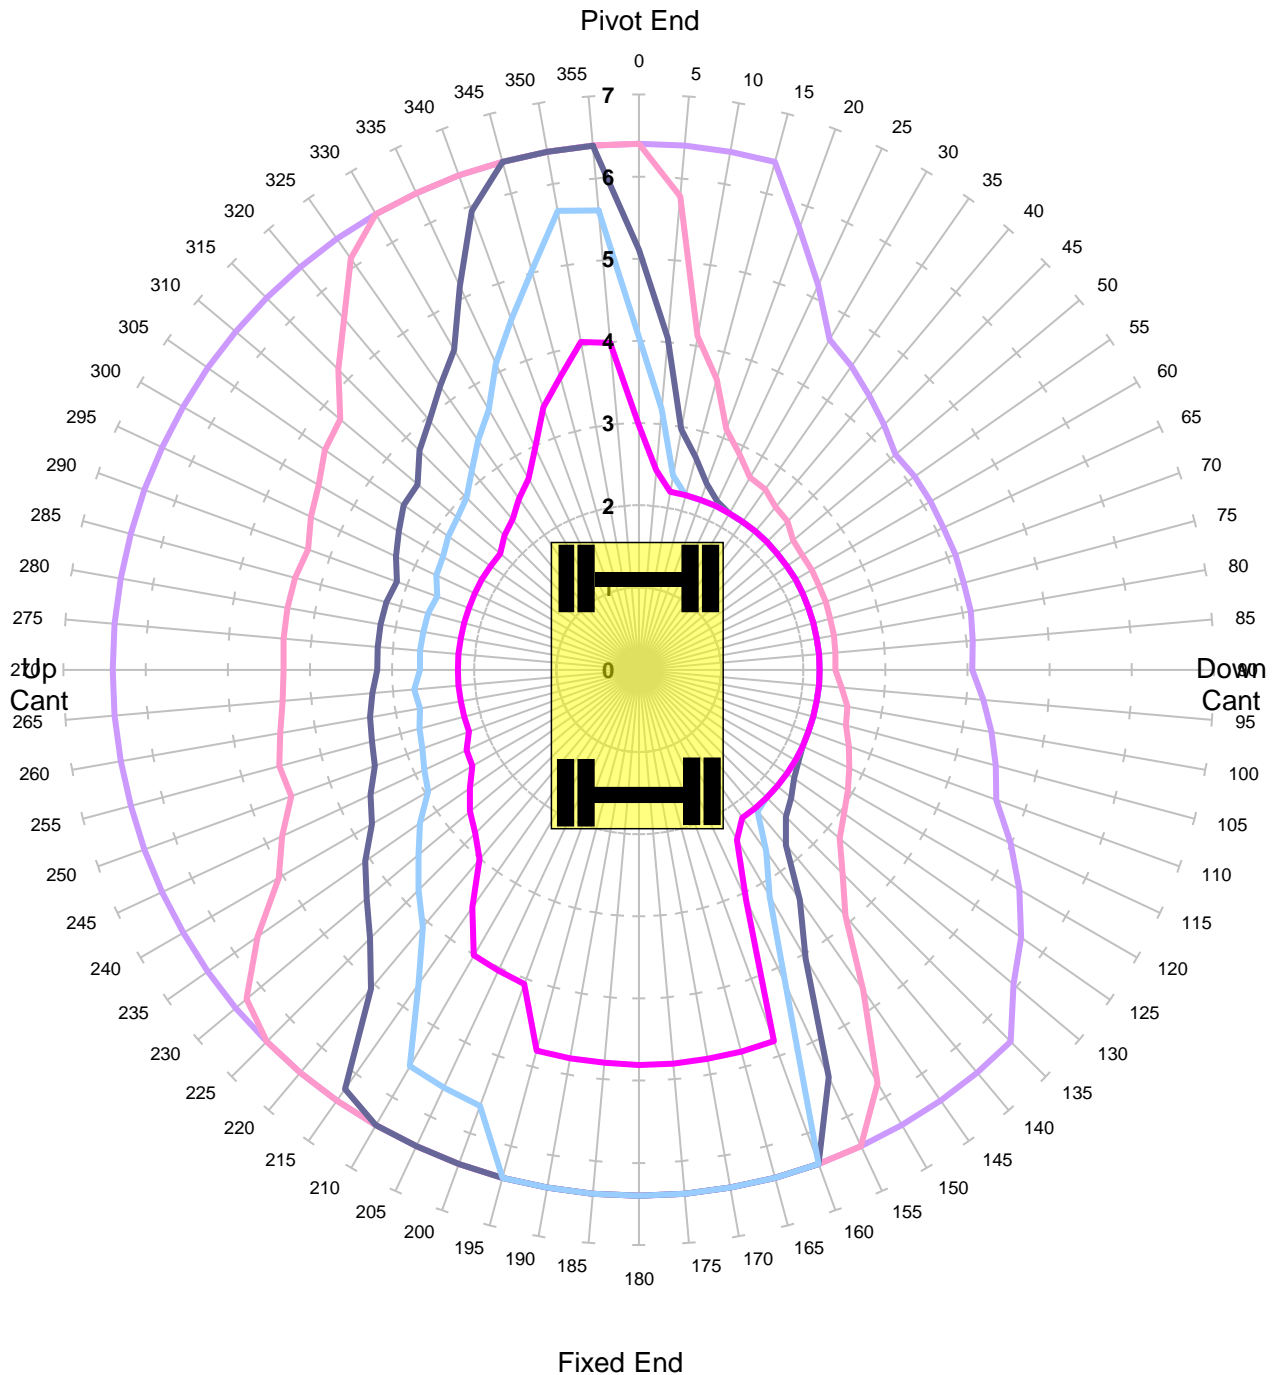

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant -50mm - Tandem Lift**

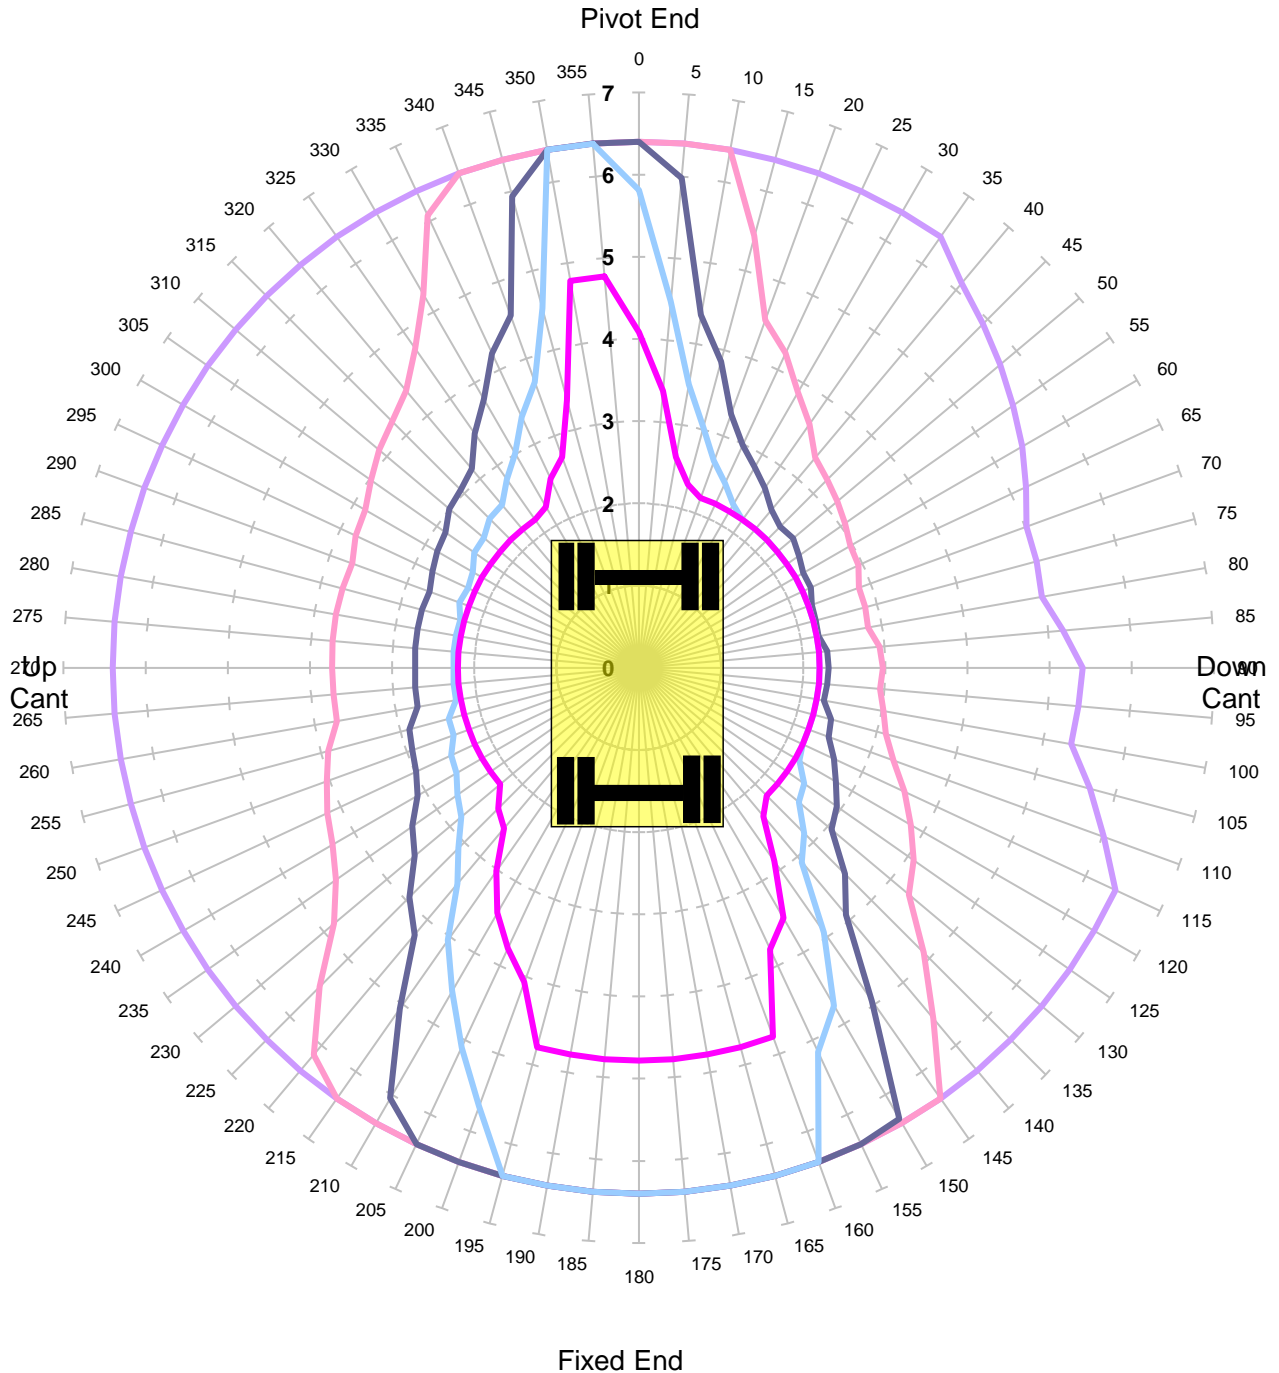


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant 50mm - Tandem Lift**

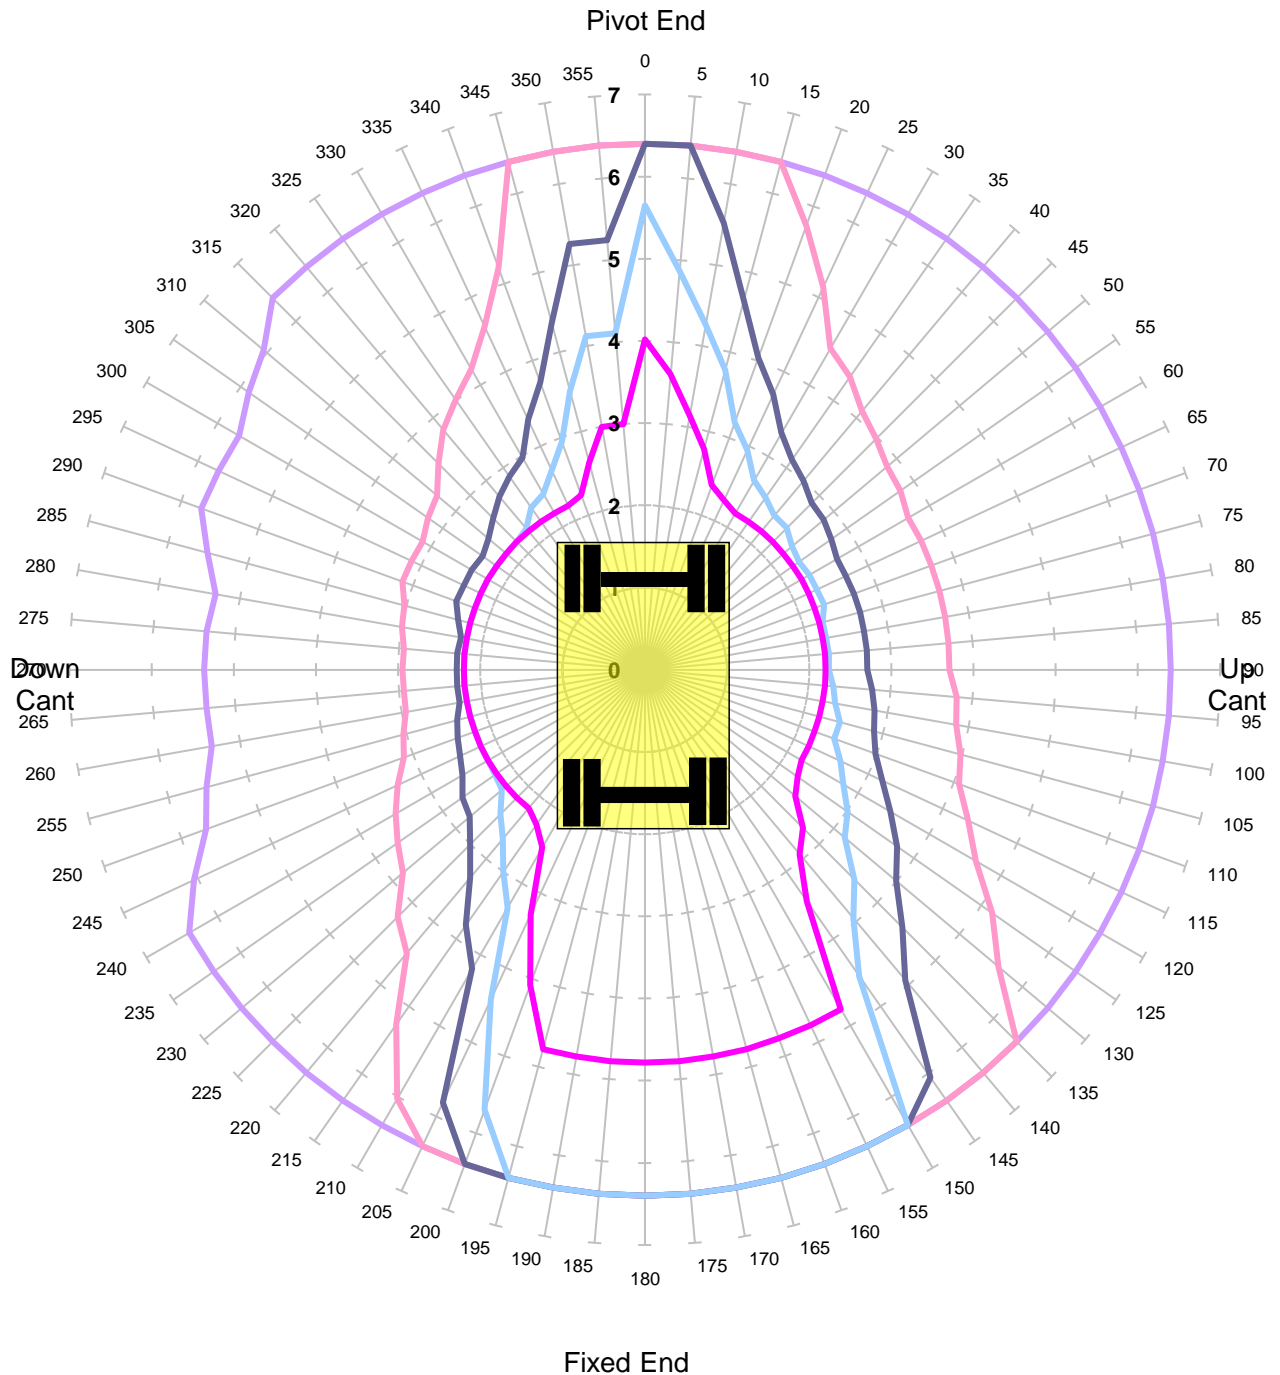


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Unlocked Rail Cant 150mm - Tandem Lift**

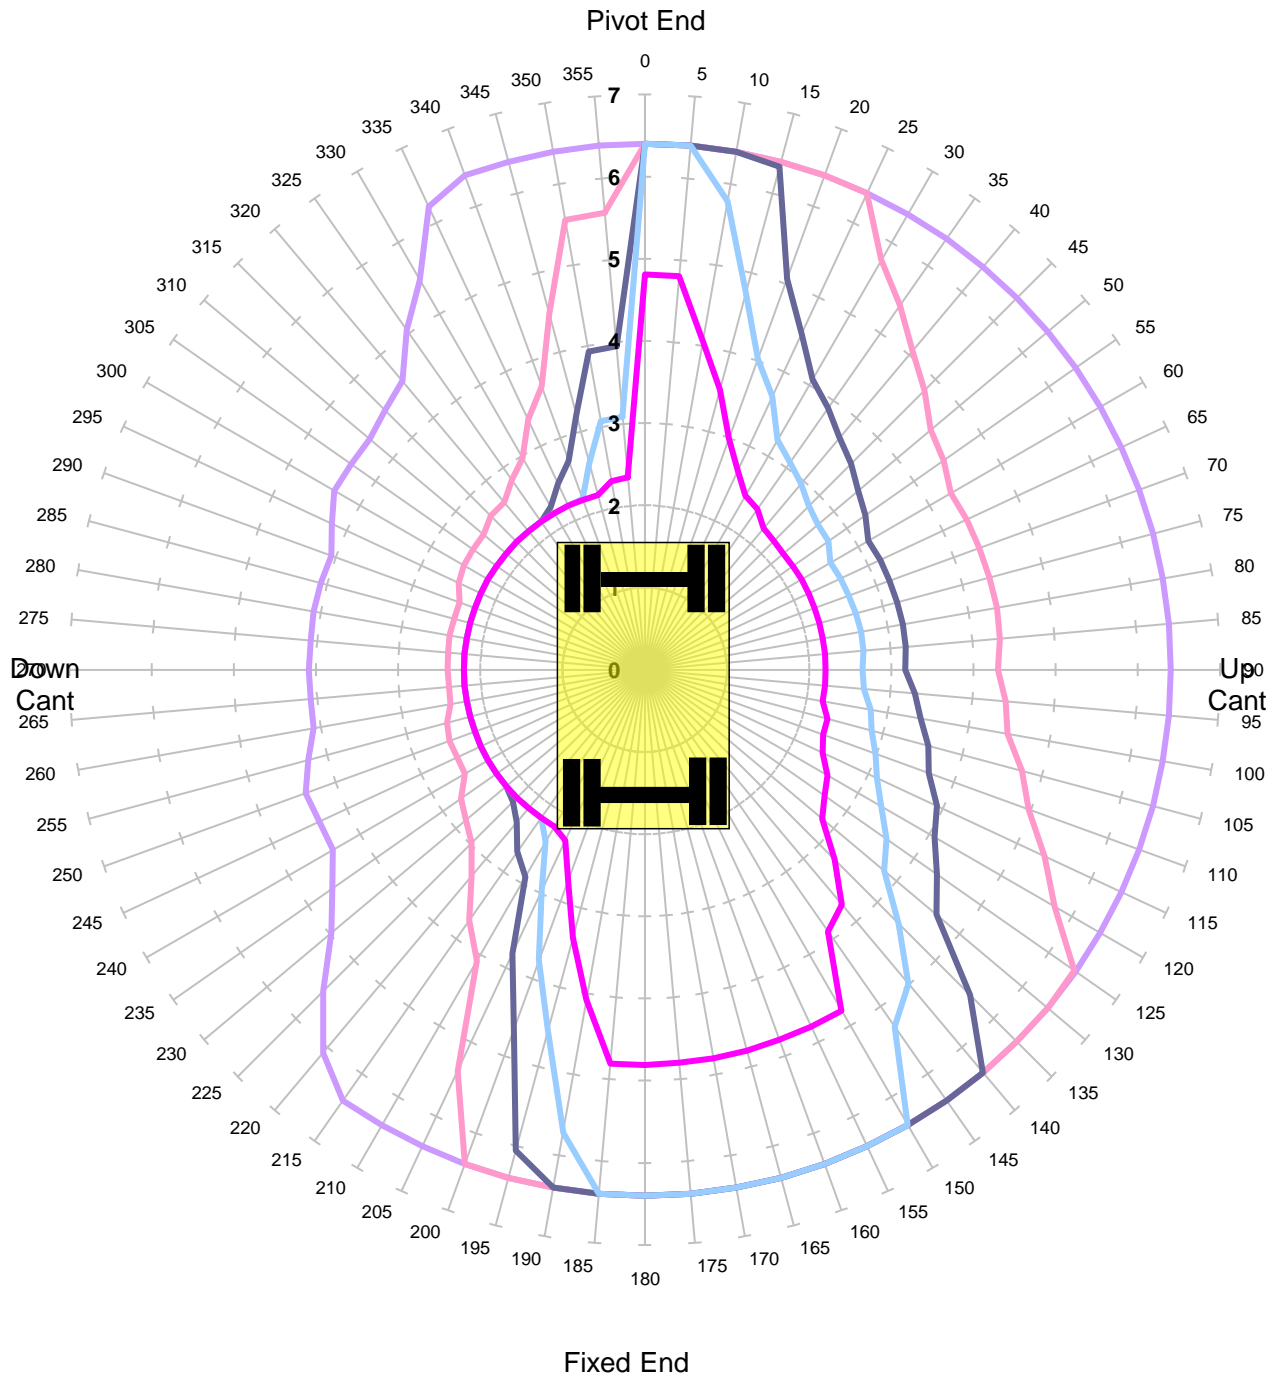


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	45.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant -150mm - Tandem Lift**

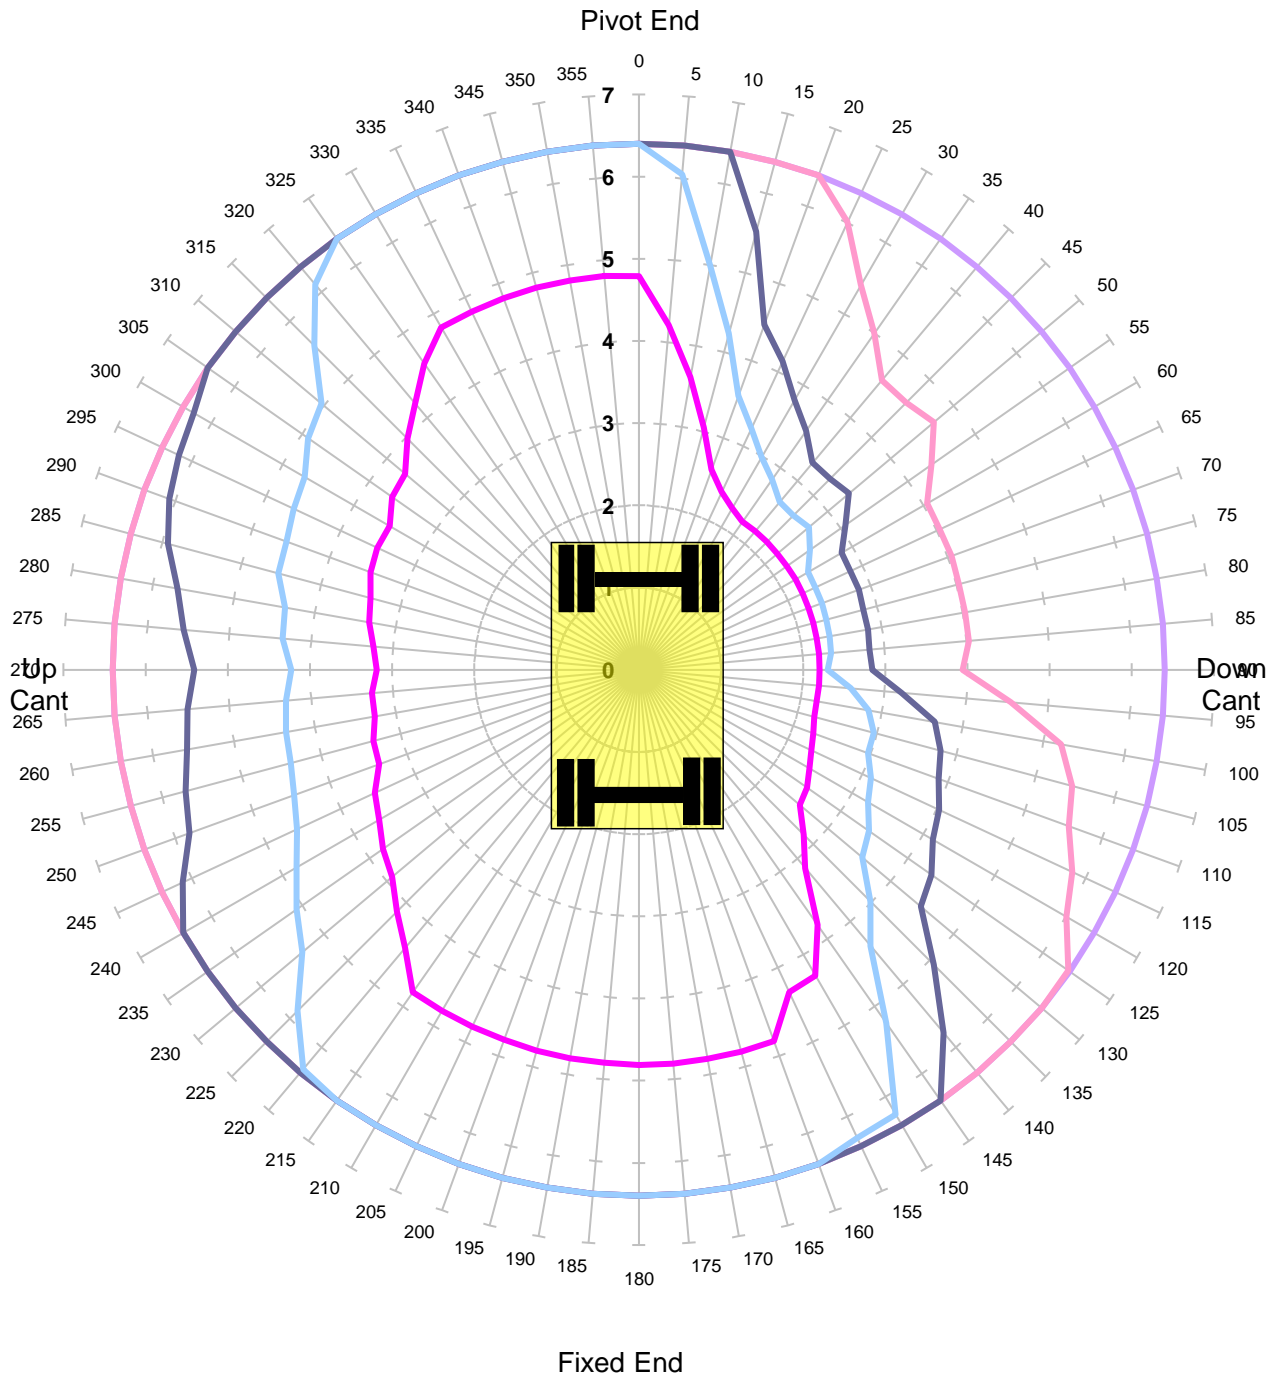


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant -50mm - Tandem Lift**

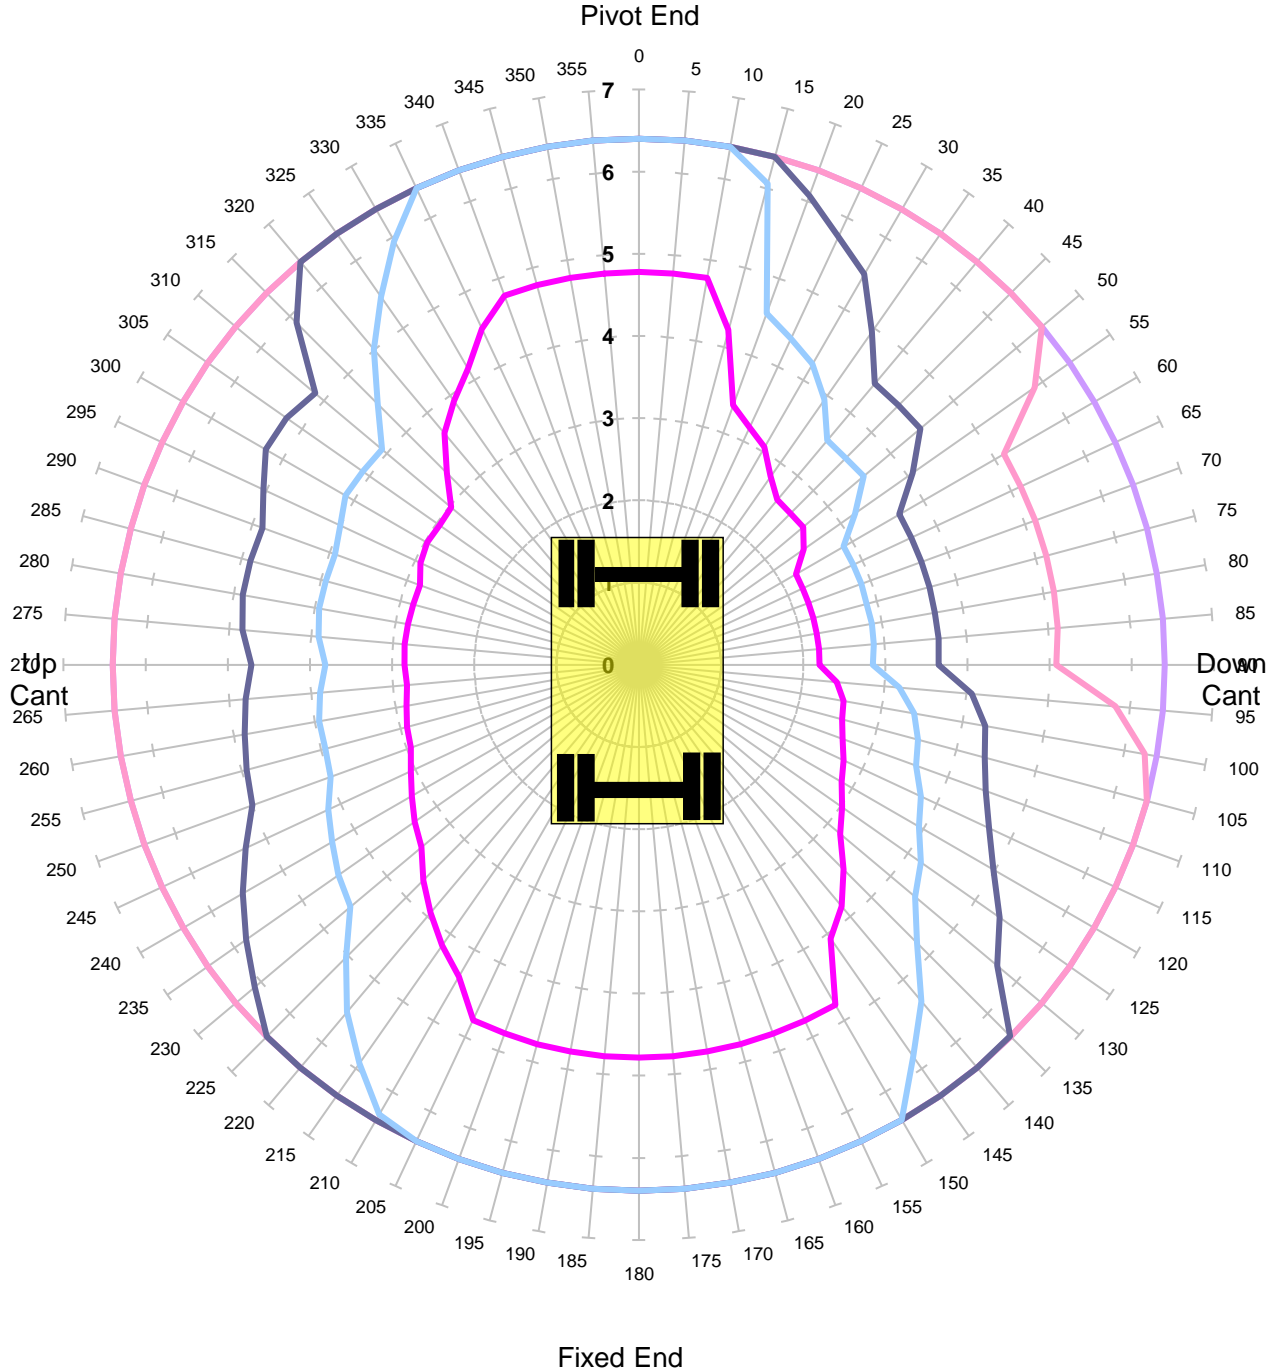


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant 50mm - Tandem Lift**

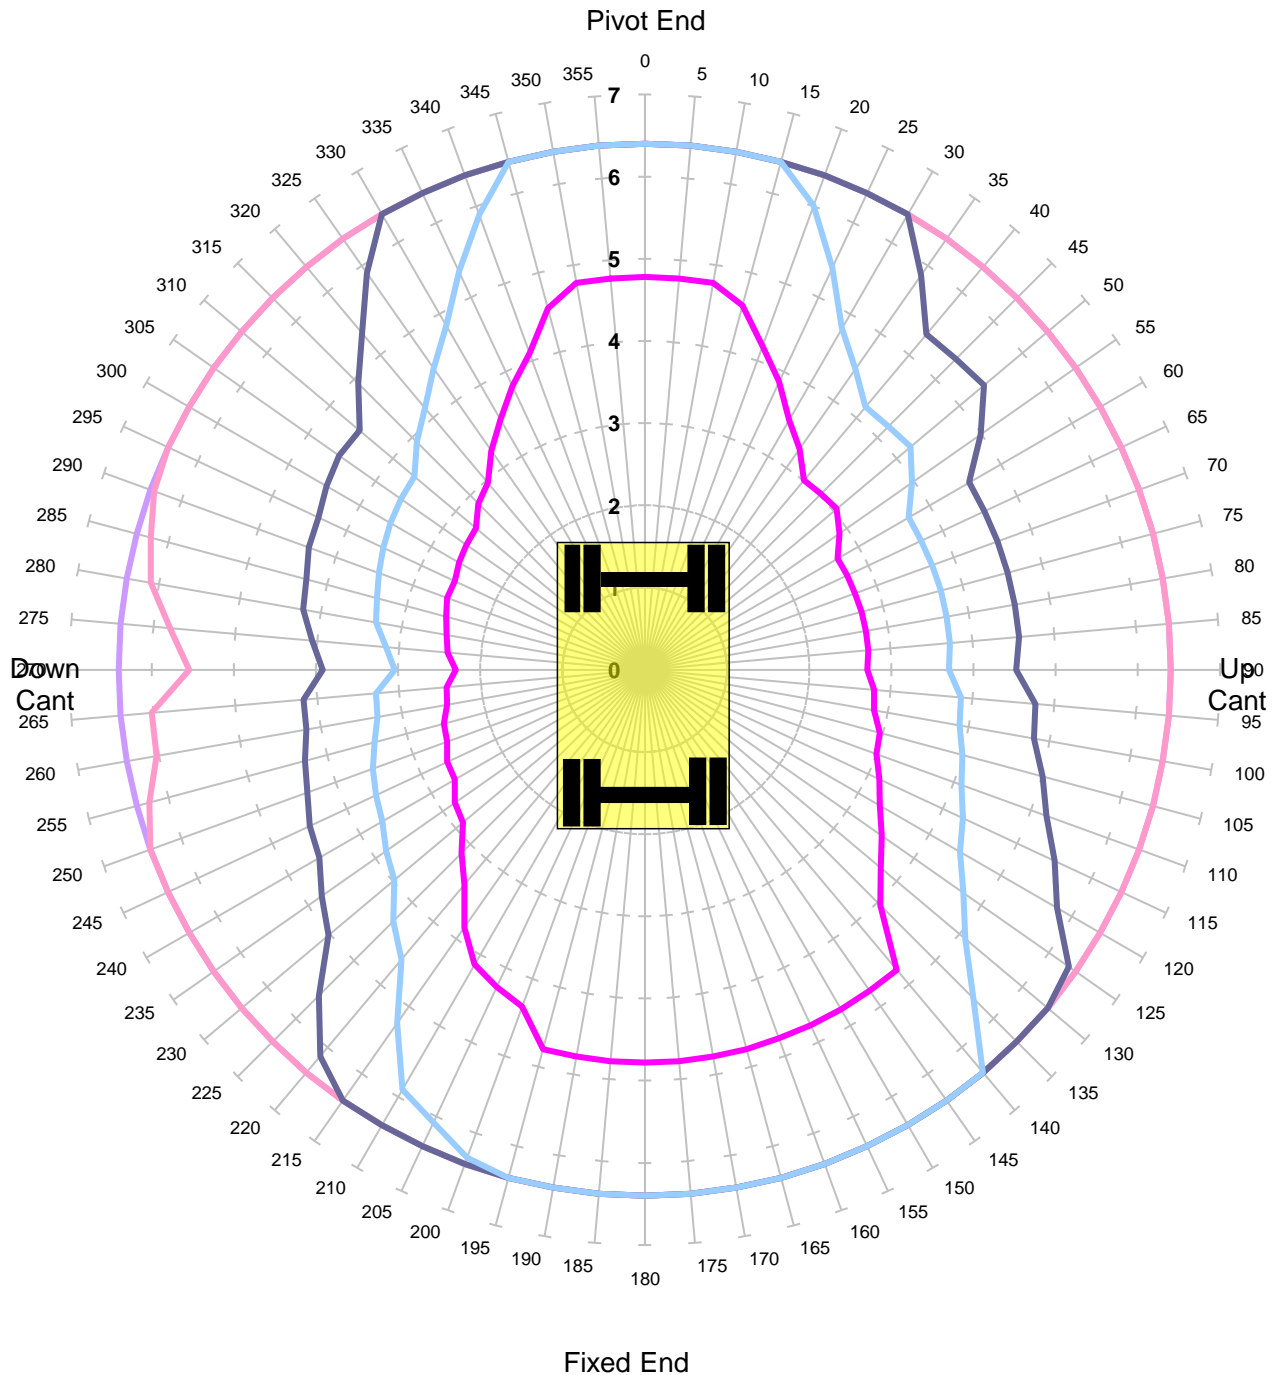


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Gradient 1 in -25 Height 2m Lift ALP1
Locked Rail Cant 150mm - Tandem Lift**

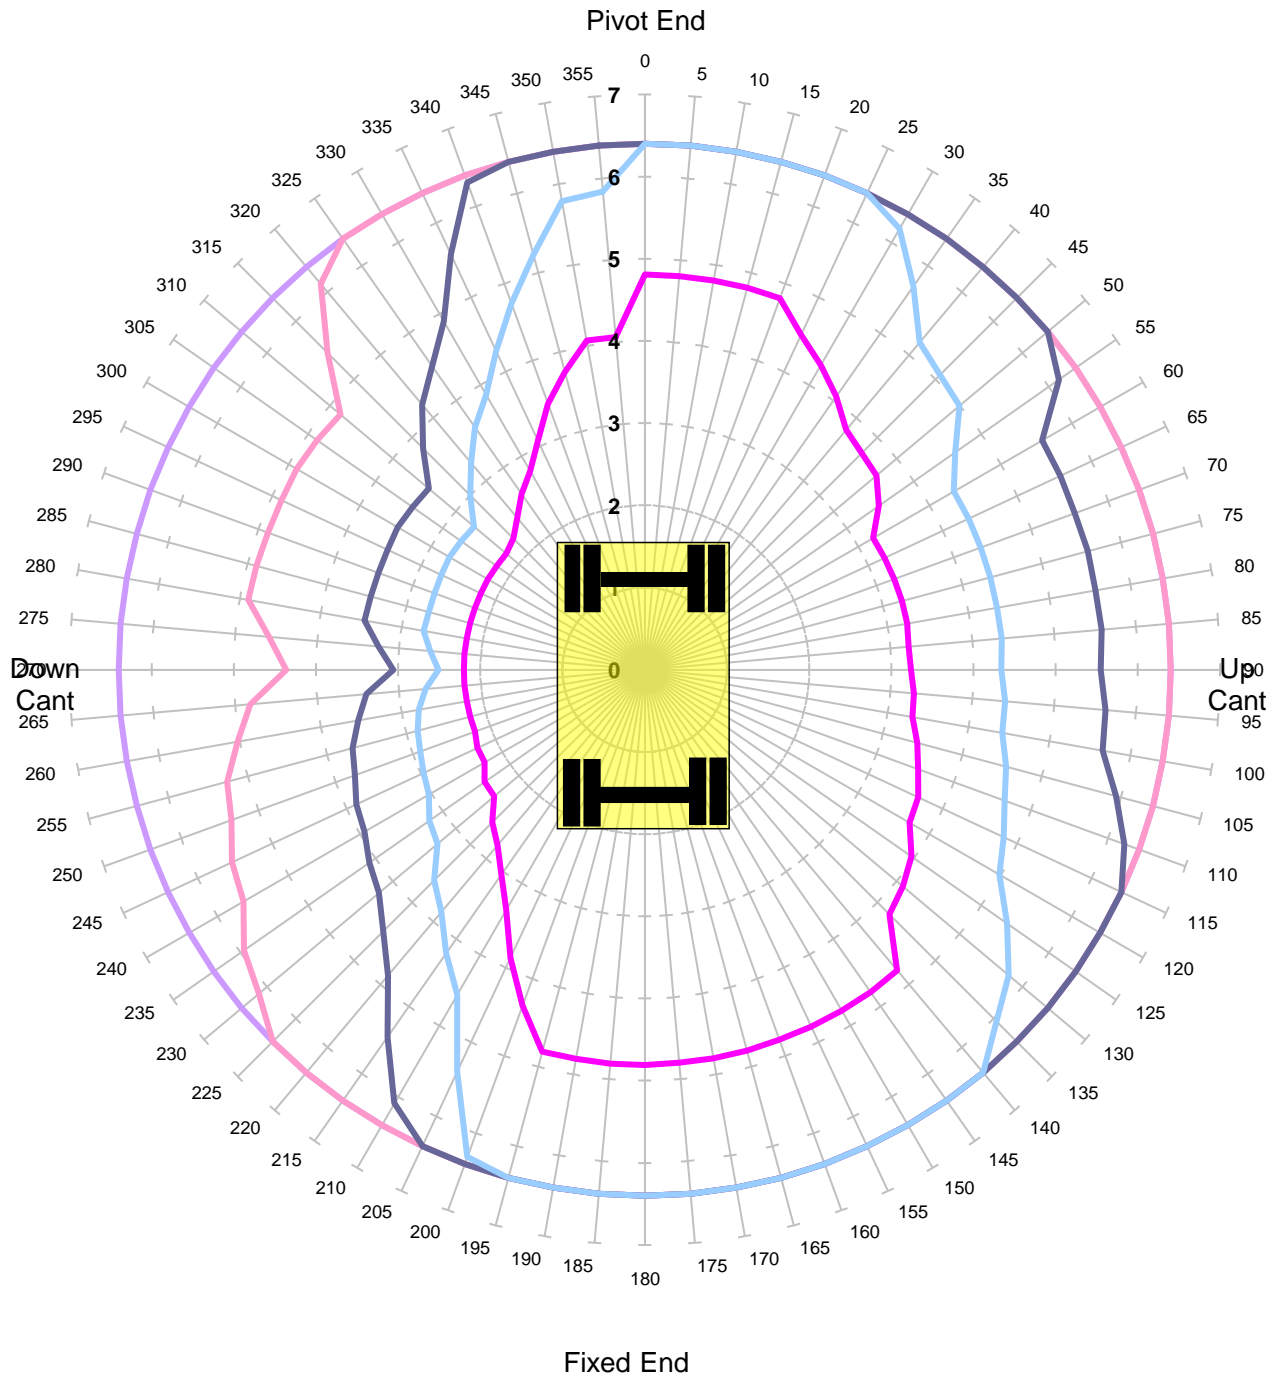

Units in Tonnes


- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	60.0%
COMMENT:			

Liebherr 924

**Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift ALP1**

Unlocked Road - Tandem Lift

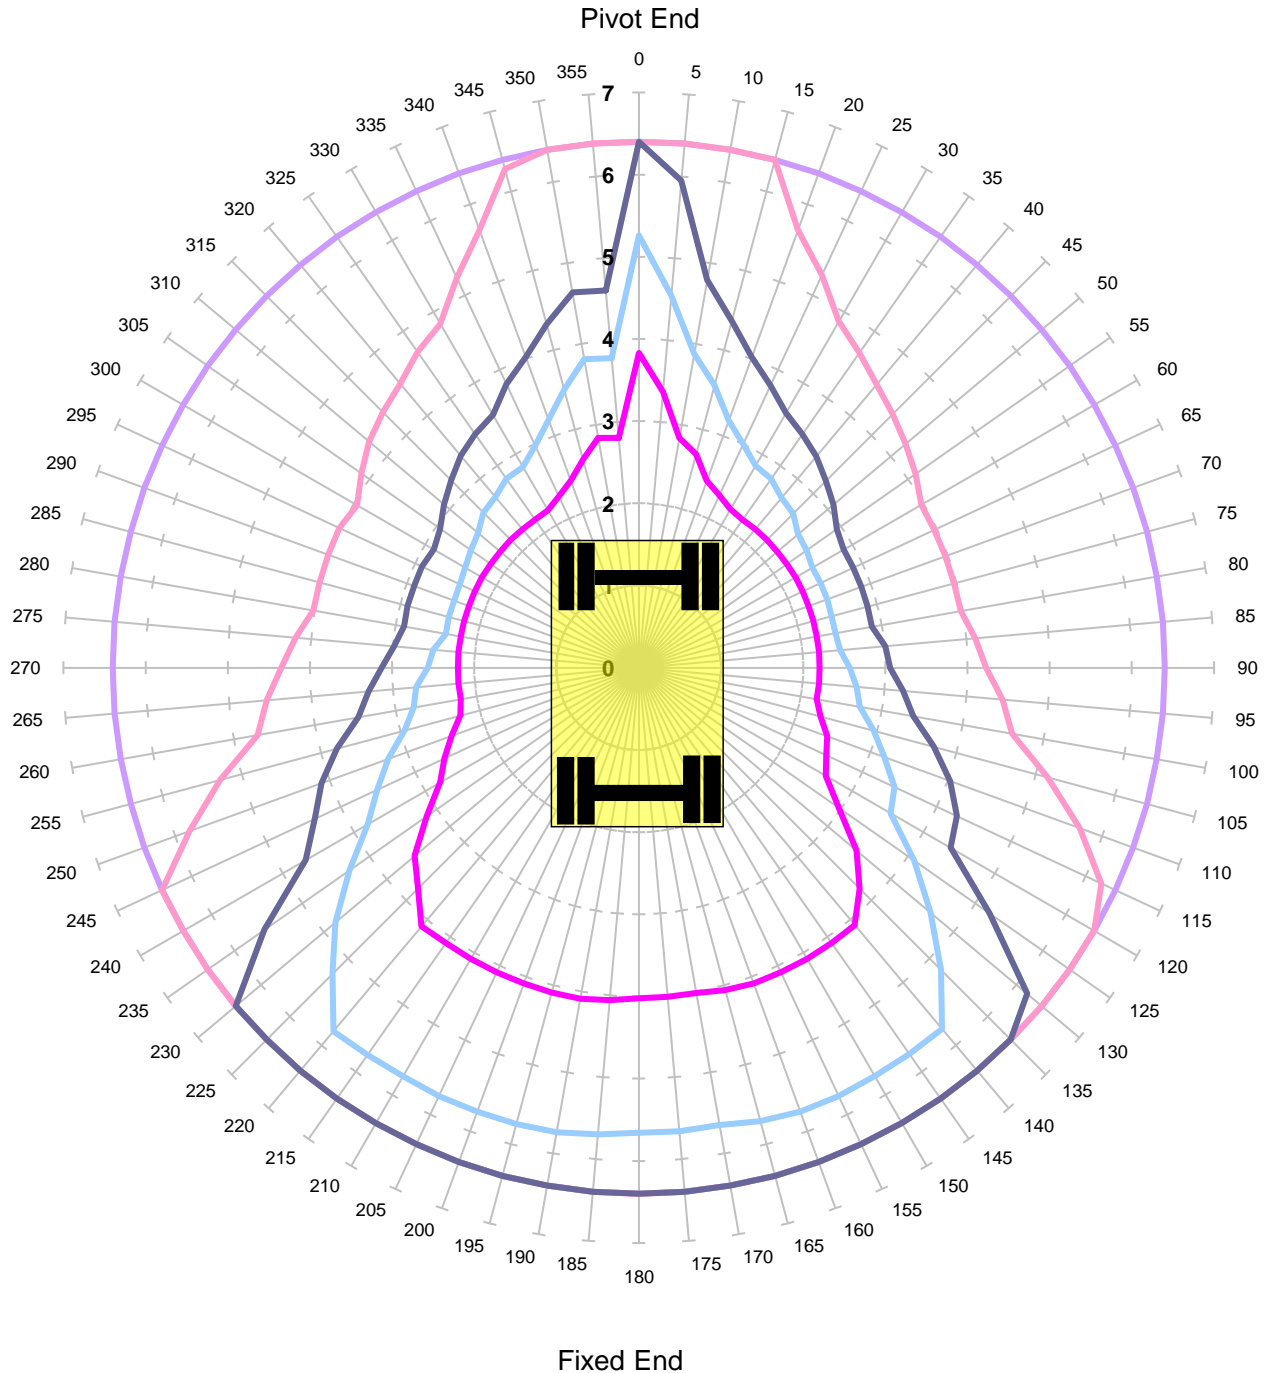


Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	47.0%
COMMENT:			

Liebherr 924
Max Capacity Contours of Radius(m) Plots 1.9m Dipper
Level Ground Height 2m Lift ALP1
Locked Road - Tandem Lift

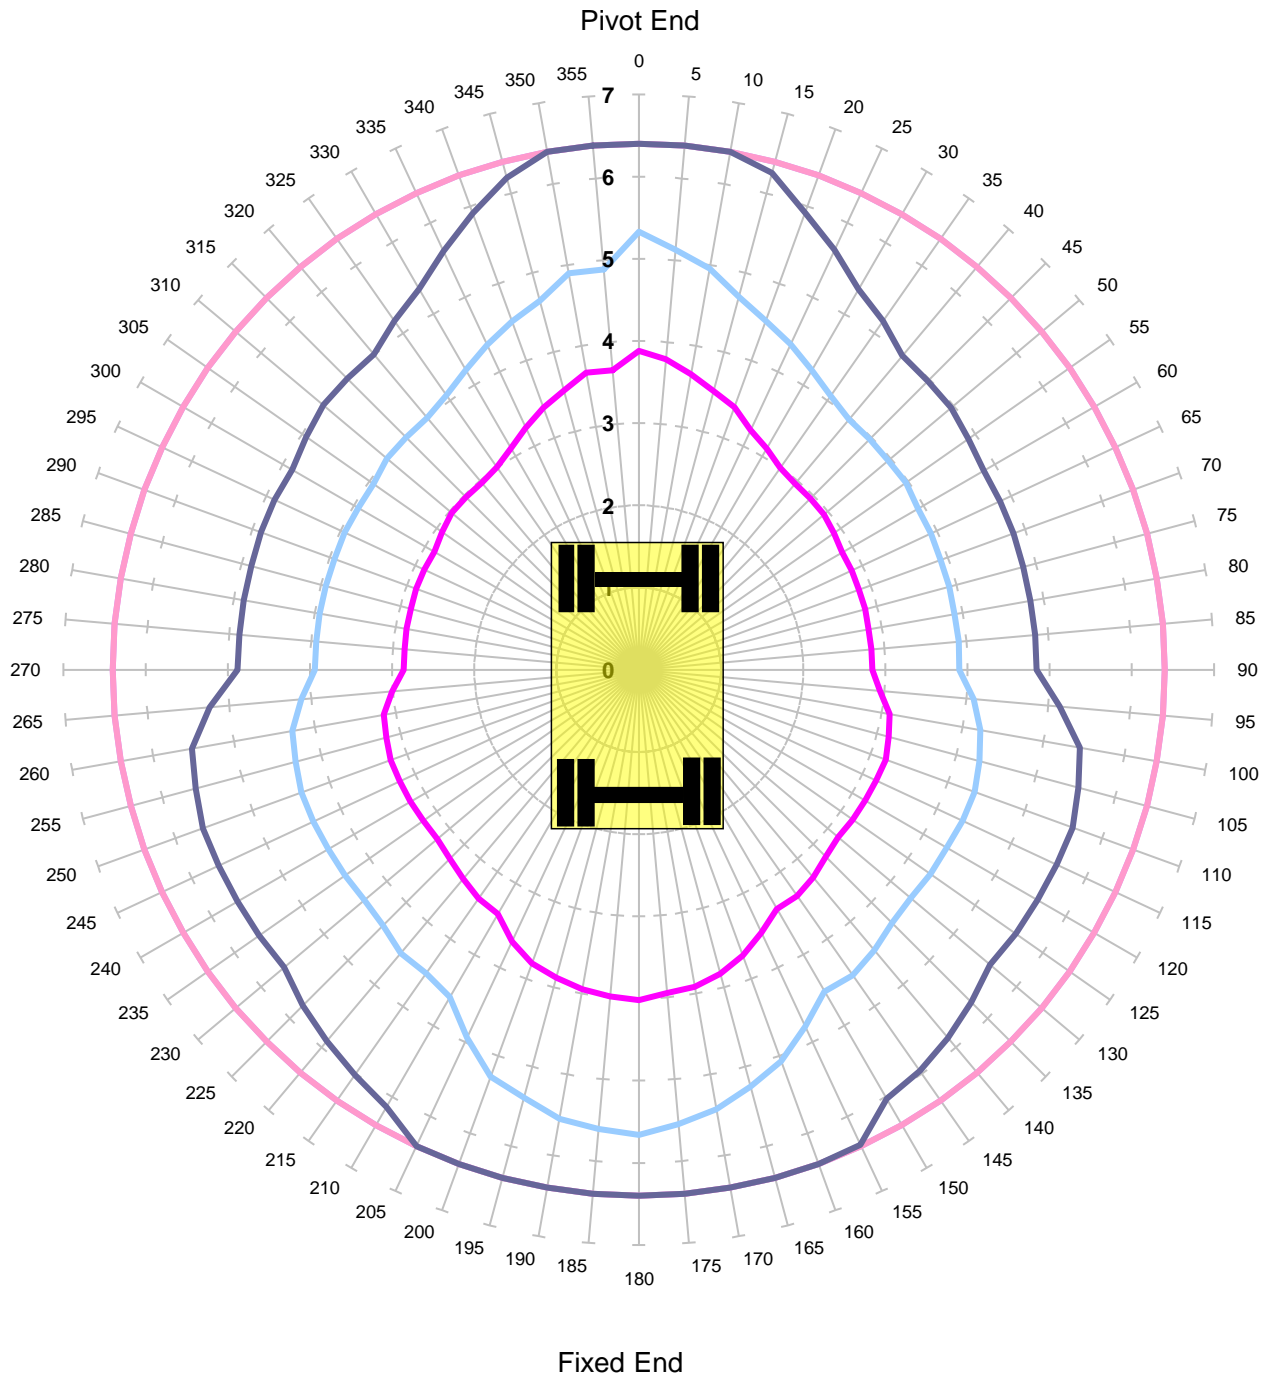

Units in Tonnes

- 1
- 2
- 3
- 4
- 6

MACHINE & MODEL:	Liebherr 924	REFERENCE:	AJH Install
SERIAL No:	K132870	DATE OF CHART:	9-Oct-2023
EQUIPMENT:	2.08m + 3.40m + 1.85m	SAFETY FACTOR:	47.0%
COMMENT:			